

NARROW SPOT



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium | Black | White | Custom

**Cutout**  $\varnothing 44 \times 66$ mm

**Ceiling Thickness** 5-25mm

**Minimum Ceiling Void** 20mm above top of luminaire module

**Accessories** Lenses

**System Power** 8.8W

**Module Output** 712lm

**Absolute Output** 658lm

**LOR** 93%

**Colour Temperature** 3000K\*


**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 12°

**Gear Type** Dimmable options available


**Weight** 181g

\* Please enquire as to the availability of non-standard colour temperatures.

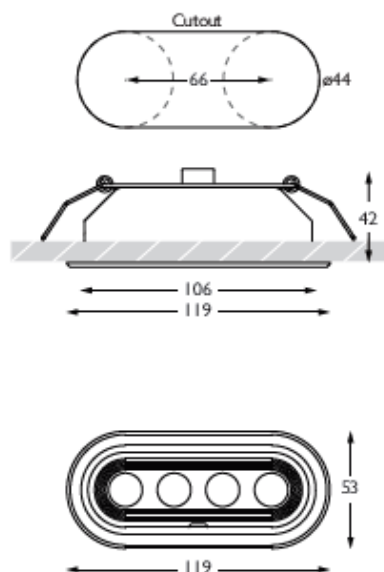


Domino 4 Recessed is a recessed 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder, stepped for glare control, which can take accessories up to 2mm thick. Domino 4 Recessed is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

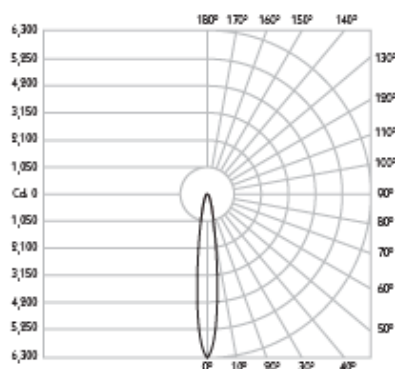

Distance	Beam Diameter	Light Output (lm)
1m	0.21m	6,285
2m	0.42m	1,570
3m	0.63m	700
4m	0.84m	390
5m	1.05m	250

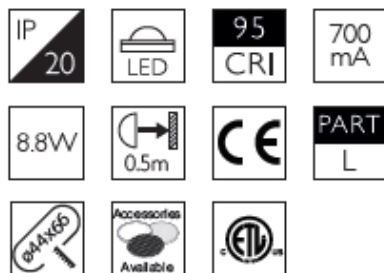

TX-654-AL-309512

TX-654-BK-309512

TX-654-WH-309512



PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA  
t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

FLOOD



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium | Black | White | Custom

**Cutout**  $\phi 44 \times 66$ mm

**Ceiling Thickness** 5-25mm

**Minimum Ceiling Void** 20mm above top of luminaire module

**Accessories** Lenses

**System Power** 8.8W

**Module Output** 712lm

**Absolute Output** 600lm

**LOR** 84%

**Colour Temperature** 3000K\*



**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 30°

**Gear Type** Dimmable options available




**Weight** 181g

\* Please enquire as to the availability of non-standard colour temperatures.

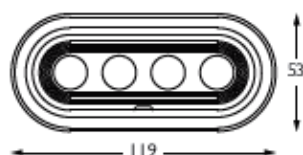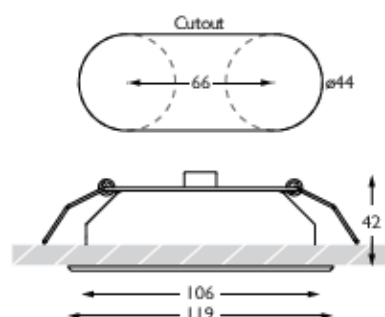

Domino 4 Recessed is a recessed 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder, stepped for glare control, which can take accessories up to 2mm thick. Domino 4 Recessed is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

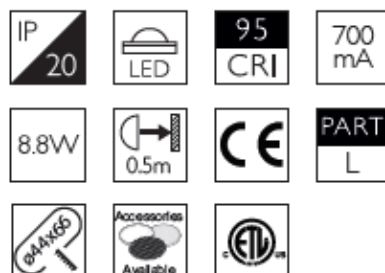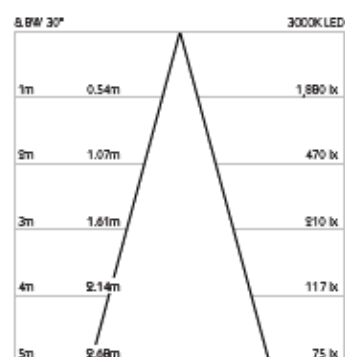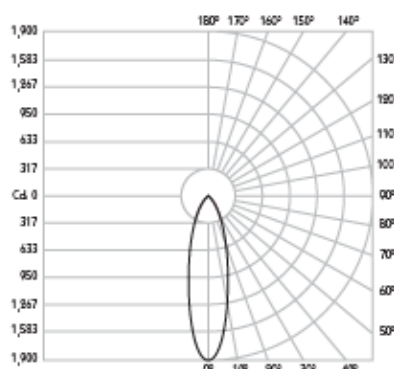

Bezel

TX-654-AL-309530

TX-654-BK-309530

TX-654-WH-309530



PRECISION  
LIGHTING



SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8986 6626

WIDE FLOOD

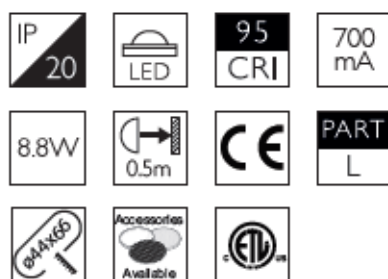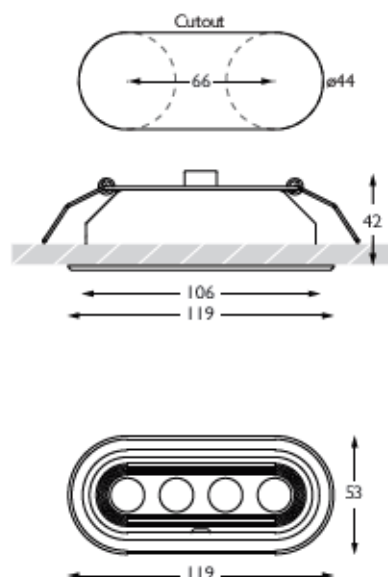

**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium | Black | White | Custom

**Cutout** ø44 x 66mm

**Ceiling Thickness** 5-25mm

**Minimum Ceiling Void** 20mm above top of luminaire module

**Accessories** Lenses

**System Power** 8.8W

**Module Output** 712lm

**Absolute Output** 655lm

**LOR** 92%

**Colour Temperature** 3000K\*

**CRI** Ra: 95 TM-30 Rf: 93 Rg: 99

**Optics** 60°

**Gear Type** Dimmable options available



**Weight** 181g

\* Please enquire as to the availability of non-standard colour temperatures.



Domino 4 Recessed is a recessed 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder, stepped for glare control, which can take accessories up to 2mm thick. Domino 4 Recessed is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

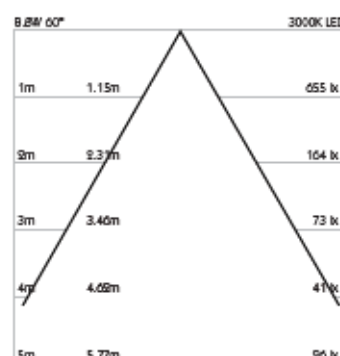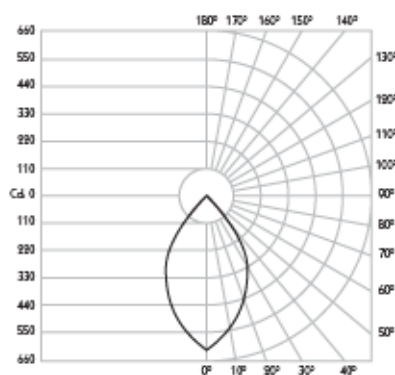

TX-054-AL-309560

TX-054-BK-309560

TX-054-WH-309560

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK


42 RIVERSIDE ROAD  
LONDON SW 17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

ELLIPSE





**Category** Interior use only IP20  
**Material** Machined Aluminium  
**Finish** Brushed Aluminium | Black | White | Custom  
**Cutout**  $\varnothing 44 \times 66$ mm  
**Ceiling Thickness** 5-25mm  
**Minimum Ceiling Void** 20mm above top of luminaire module  
**Accessories** Lenses  
**System Power** 8.8W  
**Module Output** 712lm  
**Absolute Output** 652lm  
**LOR** 92%  
**Colour Temperature** 3000K\*  
**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99  
**Optics** 12X35°  
**Gear Type** Dimmable options available  
**Weight** 181g

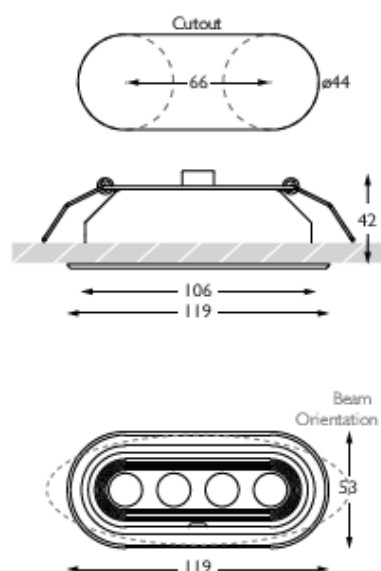

Domino 4 Recessed is a recessed 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder, stepped for glare control, which can take accessories up to 2mm thick. Domino 4 Recessed is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

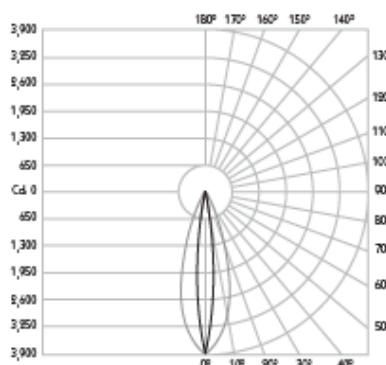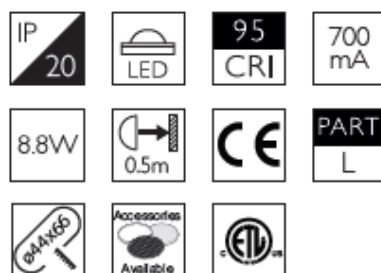

Distance	Beam Diameter	Beam Diameter	Footcandle
1m	0.63m	0.21m	3,804 lx
2m	1.26m	0.42m	973 lx
3m	1.89m	0.63m	432 lx
4m	2.52m	0.84m	243 lx
5m	3.15m	1.05m	155 lx



Bezel

TX-654-AL-3095E1

TX-654-BK-3095E1

TX-654-WH-3095E1





PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA  
t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8986 6626

## VERTICAL ELLIPSE

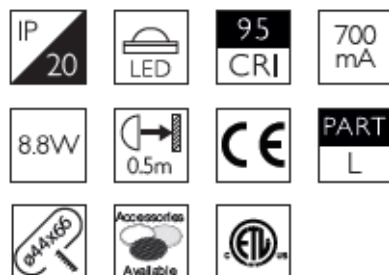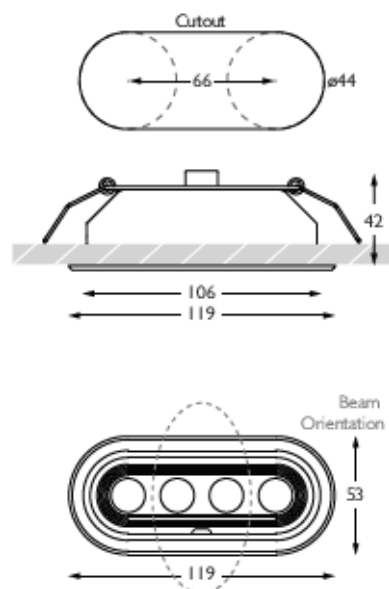

**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium | Black | White | Custom

**Cutout**  $\varnothing 44 \times 66$ mm

**Ceiling Thickness** 5-25mm

**Minimum Ceiling Void** 20mm above top of luminaire module

**Accessories** Lenses

**System Power** 8.8W

**Module Output** 712lm

**Absolute Output** 652lm

**LOR** 92%

**Colour Temperature** 3000K\*

**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 35X12°

**Gear Type** Dimmable options available


**Weight** 181g

\* Please enquire as to the availability of non-standard colour temperatures.



Domino 4 Recessed is a recessed 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder, stepped for glare control, which can take accessories up to 2mm thick. Domino 4 Recessed is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

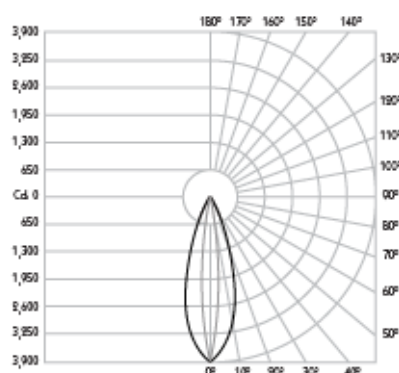

Beam Spread	Beam Diameter	Beam Area	Footcandle
1m	0.63m	0.21m	3,894 fc
2m	1.26m	0.42m	973 fc
3m	1.89m	0.63m	432 fc
4m	2.52m	0.84m	243 fc
5m	3.15m	1.05m	155 fc



Bezel

TX-654-AL-3095E2

TX-654-BK-3095E2

TX-654-WH-3095E2

SOFT ELLIPSE



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium | Black | White | Custom

**Cutout**  $\varnothing 44 \times 66$ mm

**Ceiling Thickness** 5-25mm

**Minimum Ceiling Void**  $\geq 20$ mm above top of luminaire module

**Accessories** Lenses

**System Power** 8.8W

**Module Output** 712lm

**Absolute Output** 626lm

**LOR** 88%

**Colour Temperature** 3000K\*


**CRI** Ra: 95 TM-30 Rf: 93 Rg: 99

**Optics** 15X30°

**Gear Type** Dimmable options available




**Weight** 181g

\* Please enquire as to the availability of non-standard colour temperatures.

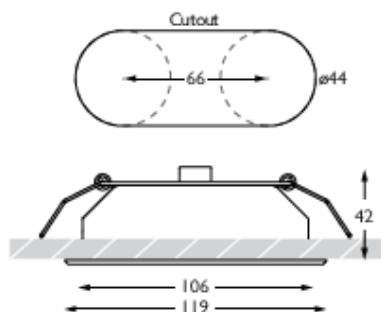

Domino 4 Recessed is a recessed 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder, stepped for glare control, which can take accessories up to 2mm thick. Domino 4 Recessed is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

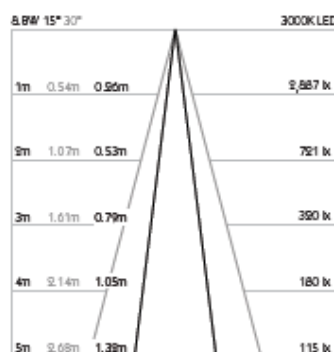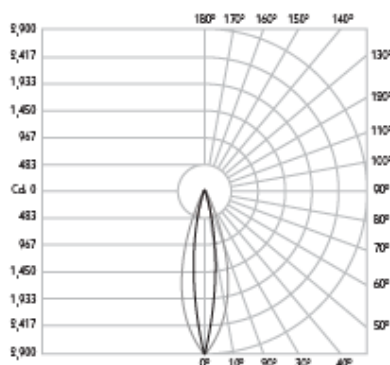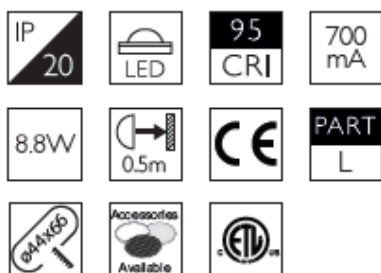

Bezel

TX-654-AL-3095E3

TX-654-BK-3095E3

TX-654-WH-3095E3



PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW 17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626



VERTICAL SOFT ELLIPSE



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium | Black | White | Custom

**Cutout**  $\varnothing 44 \times 66\text{mm}$

**Ceiling Thickness** 5-25mm

**Minimum Ceiling Void** 20mm above top of luminaire module

**Accessories** Lenses

**System Power** 8.8W

**Module Output** 712lm

**Absolute Output** 626lm

**LOR** 88%

**Colour Temperature** 3000K\*



**CRI** Ra: 95 TM-30 Rf: 93 Rg: 99

**Optics** 30X15°

**Gear Type** Dimmable options available



**Weight** 181g

\* Please enquire as to the availability of non-standard colour temperatures.

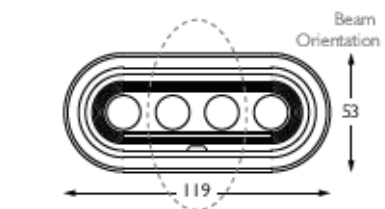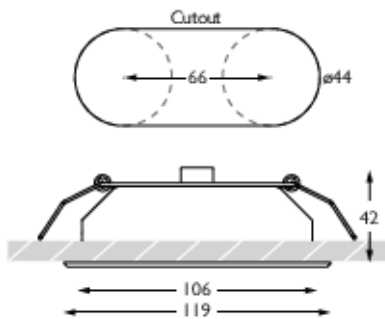

Domino 4 Recessed is a recessed 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder, stepped for glare control, which can take accessories up to 2mm thick. Domino 4 Recessed is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

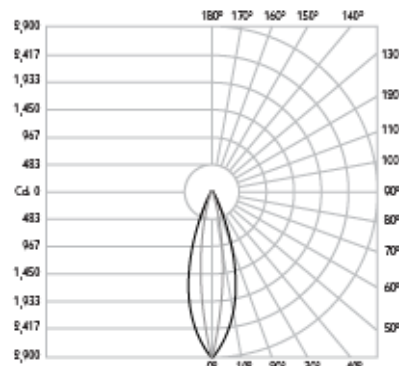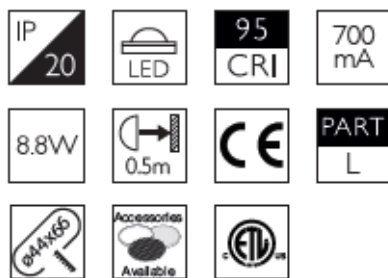

Distance (m)	Beam Width (m)	Beam Depth (m)	Light Output (lx)
1m	0.54m	0.26m	9,887 lx
2m	1.07m	0.53m	721 lx
3m	1.61m	0.79m	390 lx
4m	2.14m	1.05m	180 lx
5m	2.68m	1.32m	115 lx



Bezel

TX-654-AL-3095E4

TX-654-BK-3095E4

TX-654-WH-3095E4

PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

FOCAL SPOT



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium | Black | White | Custom

**Cutout**  $\varnothing 44 \times 66$ mm

**Ceiling Thickness** 5-25mm

**Minimum Ceiling Void** 20mm above top of luminaire module

**Accessories** Lenses

**System Power** 8.8W

**Module Output** 712lm

**Absolute Output** 630lm

**LOR** 88%

**Colour Temperature** 3000K\*



**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 12° | 30°

**Gear Type** Dimmable options available


**Weight** 181g

\* Please enquire as to the availability of non-standard colour temperatures.

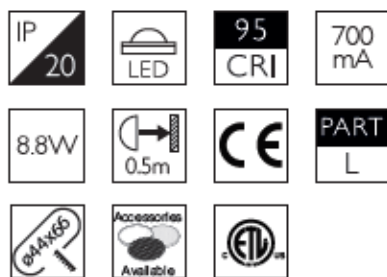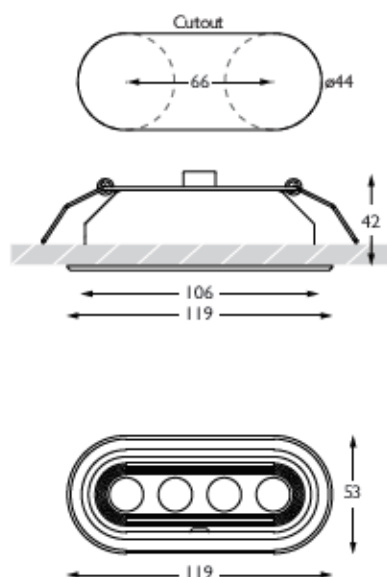

Domino 4 Recessed is a recessed 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder, stepped for glare control, which can take accessories up to 2mm thick. Domino 4 Recessed is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

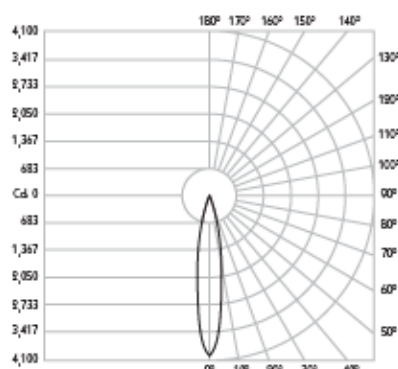

Beam Spread	Distance	Beam Diameter	Light Output (lx)
180°	1m	0.30m	4,084 lx
130°	2m	0.60m	1,021 lx
90°	3m	0.90m	453 lx
60°	4m	1.20m	255 lx
30°	5m	1.40m	163 lx



Bezel

TX-054-AL-3095C1

TX-054-BK-3095C1

TX-054-WH-3095C1



PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626



## FOCAL FLOOD



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium | Black | White | Custom

**Cutout**  $\varnothing 44 \times 66\text{mm}$

**Ceiling Thickness** 5-25mm

**Minimum Ceiling Void** 20mm above top of luminaire module

**Accessories** Lenses

**System Power** 8.8W

**Module Output** 712lm

**Absolute Output** 657lm

**LOR** 92%

**Colour Temperature** 3000K\*


**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 12° | 60°

**Gear Type** Dimmable options available



**Weight** 181g

\* Please enquire as to the availability of non-standard colour temperatures.

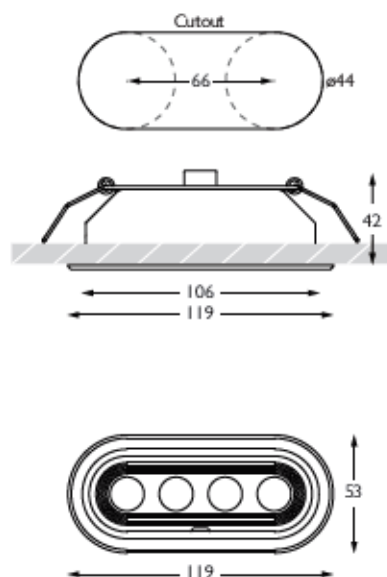

Domino 4 Recessed is a recessed 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder, stepped for glare control, which can take accessories up to 2mm thick. Domino 4 Recessed is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

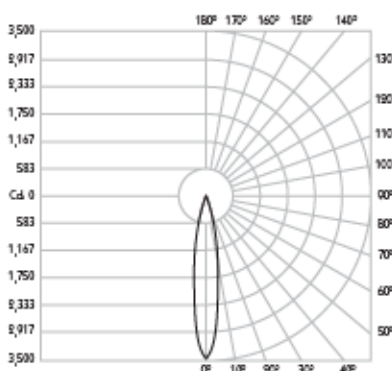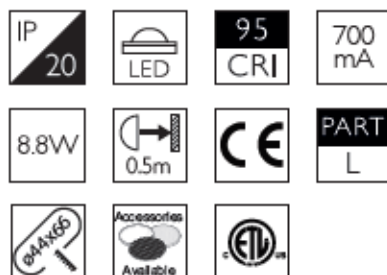

Beam Spread	Beam Diameter	3000K LED Output
1m	0.30m	3,470 lk
2m	0.50m	867 lk
3m	0.80m	385 lk
4m	1.10m	216 lk
5m	1.40m	138 lk



Bezel

TX-654-AL-3095CE

TX-654-BK-3095CE

TX-654-WH-3095CE



# DOMINO 4 RECESSED

luminaires  
spec sheet TX-654

SOFT FOCAL FLOOD



**Category** Interior use only IP20

**Material** Machined Aluminium

**Finish** Brushed Aluminium | Black | White | Custom

**Cutout**  $\phi 44 \times 66$ mm

**Ceiling Thickness** 5-25mm

**Minimum Ceiling Void** 20mm above top of luminaire module

**Accessories** Lenses

**System Power** 8.8W

**Module Output** 712lm

**Absolute Output** 628lm

**LOR** 92%

**Colour Temperature** 3000K\*


**CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99

**Optics** 30° | 60°

**Gear Type** Dimmable options available




**Weight** 181g

\* Please enquire as to the availability of non-standard colour temperatures.

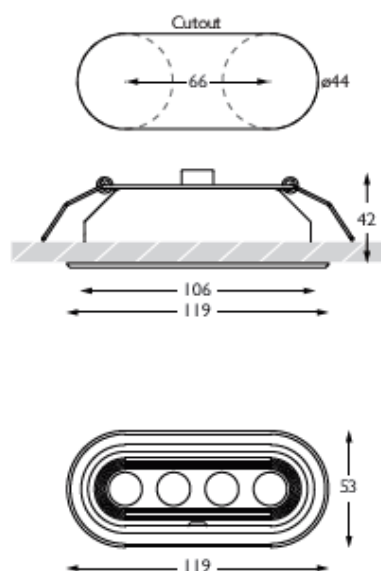

Domino 4 Recessed is a recessed 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The luminaire comes as standard in white, black and brushed aluminium finishes, with four light sources. Each light source can be configured separately with one of five changeable optics, facilitating a large number of distribution choices. The built-in magnetic accessory holder, stepped for glare control, which can take accessories up to 2mm thick. Domino 4 Recessed is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 712lm at 8.8W.

Product Photometry independently tested in accordance with LM-79

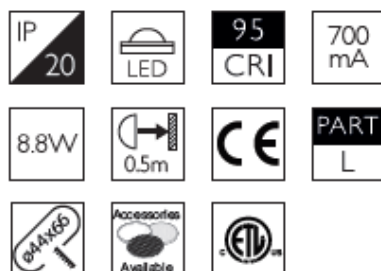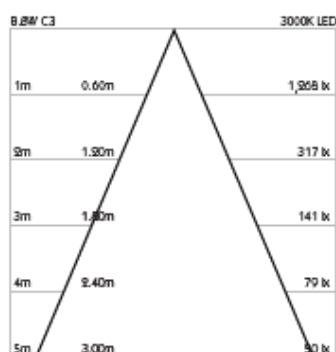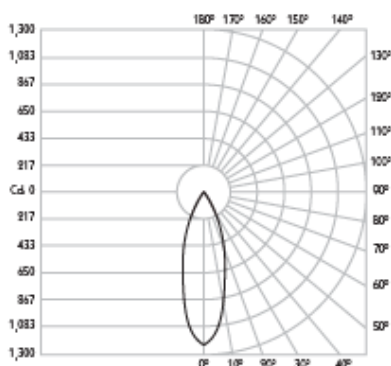

Bezel

TX-654-AL-3095C3

TX-654-BK-3095C3

TX-654-WH-3095C3



PRECISION  
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626