

DOMINO 2 RECESSED TRIMLESS

luminaires
spec sheet TS-652

NARROW SPOT



Category Interior use only IP20

Material Machined Aluminium

Cutout ø44 x 22mm

Ceiling Thickness 5-25mm

Minimum Ceiling Void 20mm above top of luminaire module

Accessories Lenses

System Power 4.4W

Module Output 356lm

Absolute Output 329lm

LOR 93%

Colour Temperature 3000K*



CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 12°

Gear Type Dimmable options available


Weight 107g

* Please enquire as to the availability of non-standard colour temperatures.

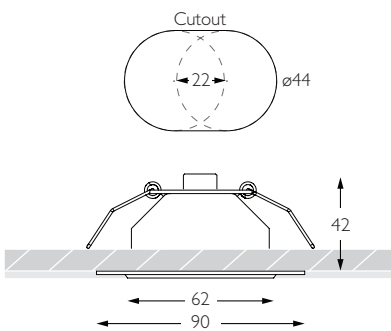

Domino 2 Recessed Trimless is a recessed 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The plaster-in luminaire has a passivated aluminium flange suitable for a 3mm plaster skim, and offers five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Recessed Trimless is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

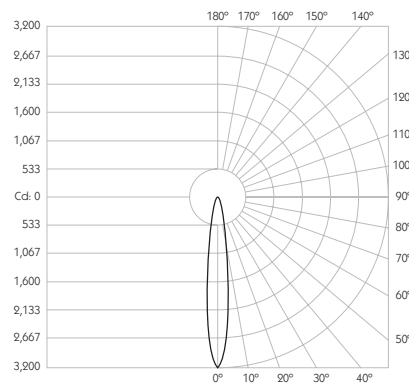


Height (m)	Beam Diameter (m)	Beam Area (m²)	Illuminance (lx)
1m	0.21m	0.0044	3,140 lx
2m	0.42m	0.0176	785 lx
3m	0.63m	0.0396	350 lx
4m	0.84m	0.0706	196 lx
5m	1.05m	0.108	125 lx

IP 20	LED	95 CRI	700 mA
4.4W	0.5m	CE	PART L
ø44x22	Accessories Available	ETL US	



Trimless

TS-652-AL-309512

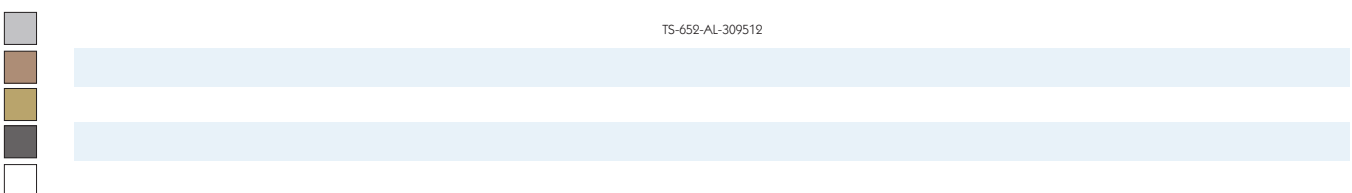

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

DOMINO 2 RECESSED TRIMLESS

luminaires
spec sheet TS-652



FLOOD



- Category** Interior use only IP20
- Material** Machined Aluminium
- Cutout** $\varnothing 44 \times 22$ mm
- Ceiling Thickness** 5-25mm
- Minimum Ceiling Void** 20mm above top of luminaire module
- Accessories** Lenses
- System Power** 4.4W
- Module Output** 356lm
- Absolute Output** 301lm
- LOR** 84%
- Colour Temperature** 3000K*
- CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99
- Optics** 30°
- Gear Type** Dimmable options available
- Weight** 107g





* Please enquire as to the availability of non-standard colour temperatures.

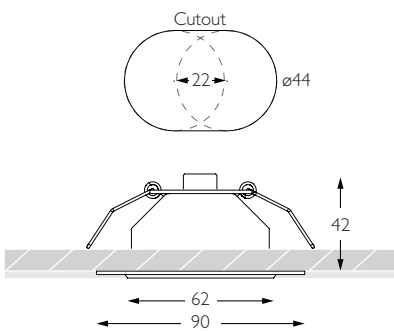

Domino 2 Recessed Trimless is a recessed 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The plaster-in luminaire has a passivated aluminium flange suitable for a 3mm plaster skim, and offers five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Recessed Trimless is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

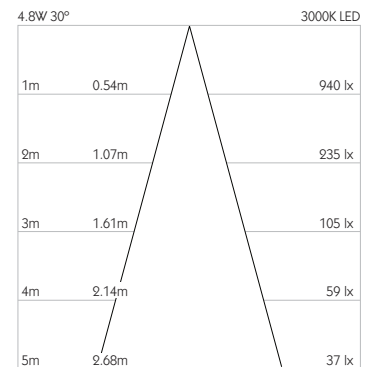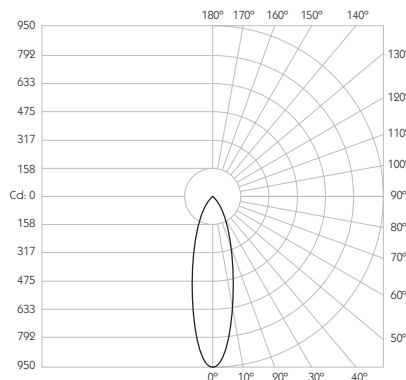


IP 20	LED	95 CRI	700 mA
4.4W	0.5m	CE	PART L
AAx22	Accessories Available	ETL US	



Trimless

TS-652-AL-309530

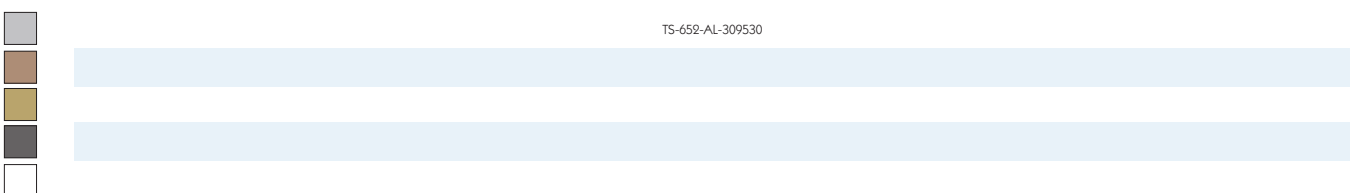

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

DOMINO 2 RECESSED TRIMLESS

luminaires
spec sheet TS-652



WIDE FLOOD



- Category** Interior use only IP20
- Material** Machined Aluminium
- Cutout** $\varnothing 44 \times 22\text{mm}$
- Ceiling Thickness** 5-25mm
- Minimum Ceiling Void** 20mm above top of luminaire module
- Accessories** Lenses
- System Power** 4.4W
- Module Output** 356lm
- Absolute Output** 327lm
- LOR** 92%
- Colour Temperature** 3000K*
- CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99
- Optics** 60°
- Gear Type** Dimmable options available
- Weight** 107g




* Please enquire as to the availability of non-standard colour temperatures.

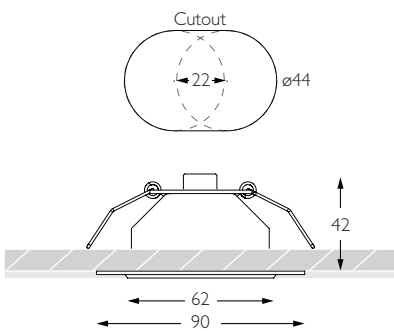

Domino 2 Recessed Trimless is a recessed 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The plaster-in luminaire has a passivated aluminium flange suitable for a 3mm plaster skim, and offers five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Recessed Trimless is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

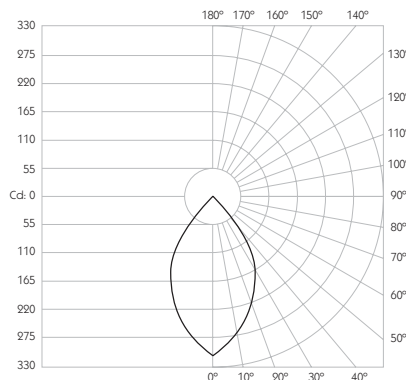


Height	Beam Spread	Beam Diameter	Illuminance (lx)
1m	60°	1.15m	327 lx
2m	60°	2.31m	82 lx
3m	60°	3.46m	36 lx
4m	60°	4.62m	20 lx
5m	60°	5.77m	13 lx



Trimless

TS-652-AL-309560

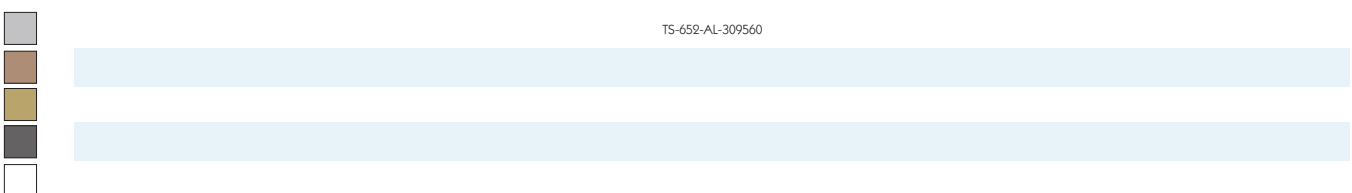

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626



DOMINO 2 RECESSED TRIMLESS

luminaires
spec sheet TS-652

ELLIPSE




- Category** Interior use only IP20
- Material** Machined Aluminium
- Cutout** $\varnothing 44 \times 22$ mm
- Ceiling Thickness** 5-25mm
- Minimum Ceiling Void** 20mm above top of luminaire module
- Accessories** Lenses
- System Power** 4.4W
- Module Output** 356lm
- Absolute Output** 327lm
- LOR** 92%
- Colour Temperature** 3000K*
- CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99
- Optics** 12X35°
- Gear Type** Dimmable options available
- Weight** 107g

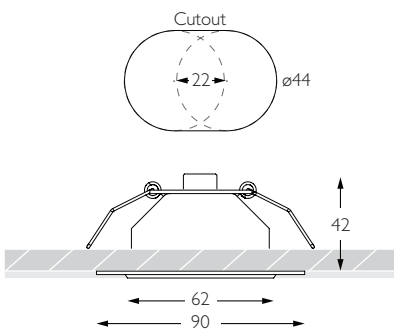

Domino 2 Recessed Trimless is a recessed 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The plaster-in luminaire has a passivated aluminium flange suitable for a 3mm plaster skim, and offers five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Recessed Trimless is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

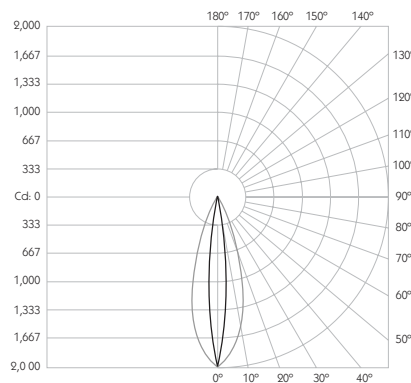

Distance (m)	Beam Diameter (m)	Beam Spread (m)	Footcandle (lx)
1m	0.63m	0.21m	1,950 lx
2m	1.26m	0.42m	487 lx
3m	1.89m	0.63m	216 lx
4m	2.52m	0.84m	121 lx
5m	3.15m	1.05m	78 lx

IP 20	LED	95 CRI	700 mA
4.4W	0.5m	CE	PART L
$\varnothing 44 \times 22$	Accessories Available	ETL US	



Trimless

TS-652-AL-3095E1



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

DOMINO 2 RECESSED TRIMLESS

luminaires
spec sheet TS-652

VERTICAL ELLIPSE



Category Interior use only IP20

Material Machined Aluminium

Cutout $\varnothing 44 \times 22$ mm

Ceiling Thickness 5-25mm

Minimum Ceiling Void 20mm above top of luminaire module

Accessories Lenses

System Power 4.4W

Module Output 356lm

Absolute Output 327lm

LOR 92%

Colour Temperature 3000K*



CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 35X12°

Gear Type Dimmable options available


Weight 107g

* Please enquire as to the availability of non-standard colour temperatures.

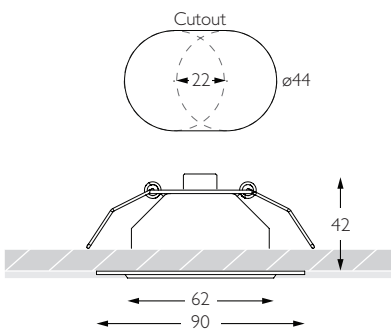


Domino 2 Recessed Trimless is a recessed 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The plaster-in luminaire has a passivated aluminium flange suitable for a 3mm plaster skim, and offers five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 2 Recessed Trimless is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 356lm at 4.4W.

Product Photometry independently tested in accordance with LM-79

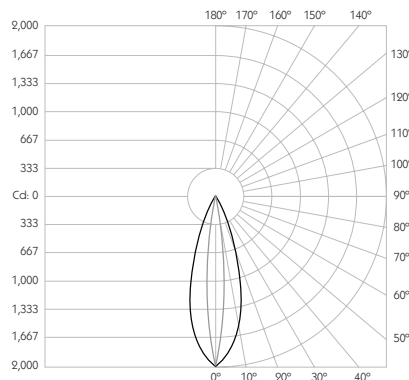


Distance (m)	Beam Width (m)	Beam Height (m)	Illuminance (lx)
1m	0.63m	0.21m	1,950 lx
2m	1.26m	0.42m	487 lx
3m	1.89m	0.63m	216 lx
4m	2.52m	0.84m	121 lx
5m	3.15m	1.05m	78 lx

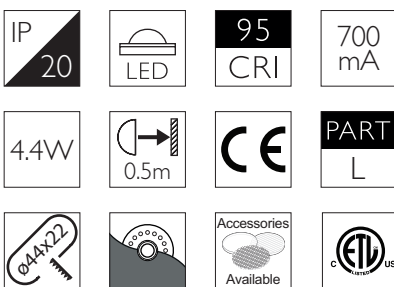

Trimless

TS-652-AL-3095E2

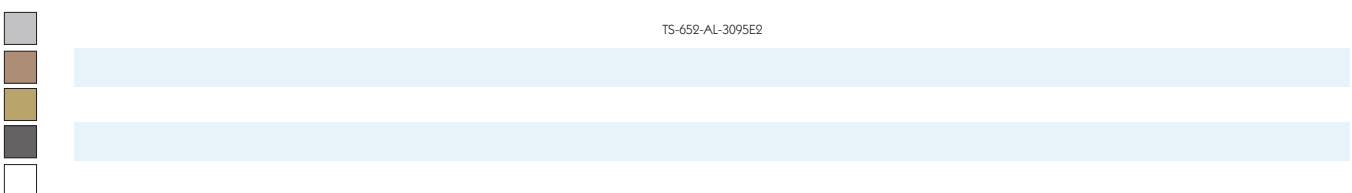

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626