

NARROW SPOT



Category Interior use only IP20

Material Machined Aluminium

Cutout $\varnothing 44$ mm

Ceiling Thickness 5-25mm

Minimum Ceiling Void 20mm above top of luminaire module

Accessories Lenses

System Power 2.2W

Module Output 178lm

Absolute Output 164lm

LOR 93%

Colour Temperature 3000K*


CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 12°

Gear Type Dimmable options available



Weight 60g

* Please enquire as to the availability of non-standard colour temperatures.

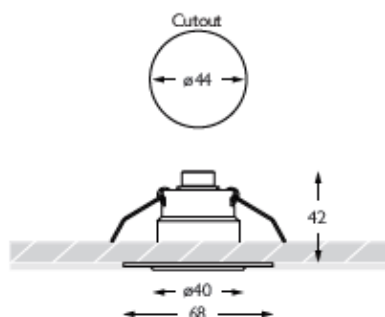

Domino 1 Recessed Trimless is a discreet 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The plaster-in luminaire has a passivated aluminium flange suitable for a 3mm plaster skim, and offers five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Recessed Trimless is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.2W.

Product Photometry independently tested in accordance with LM-79

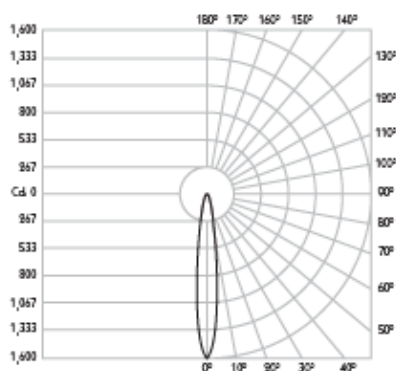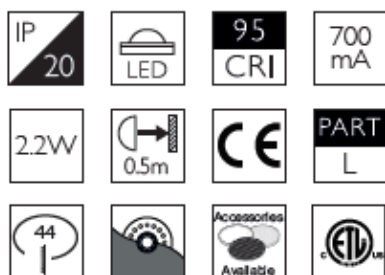

Height	Beam Diameter	Lumen Output
1m	0.21m	1,566 lx
2m	0.42m	392 lx
3m	0.63m	174 lx
4m	0.84m	98 lx
5m	1.05m	62 lx



TS-651-AL-309512



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA

t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

FLOOD



Category Interior use only IP20

Material Machined Aluminium

Cutout $\varnothing 44\text{mm}$

Ceiling Thickness 5-25mm

Minimum Ceiling Void 20mm above top of luminaire module

Accessories Lenses

System Power 2.2W

Module Output 178lm

Absolute Output 150lm

LOR 84%

Colour Temperature 3000K*


CRI Ra: 95 TM-30 Rf: 93 Rg: 99

Optics 30°

Gear Type Dimmable options available


Weight 60g

* Please enquire as to the availability of non-standard colour temperatures.

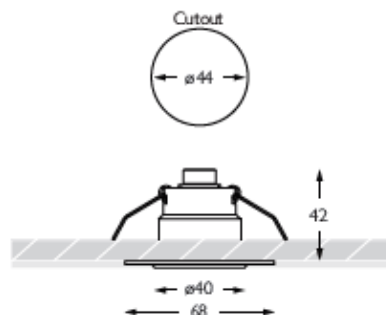


Domino 1 Recessed Trimless is a discreet 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The plaster-in luminaire has a passivated aluminium flange suitable for a 3mm plaster skim, and offers five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Recessed Trimless is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.2W.

Product Photometry independently tested in accordance with LM-79

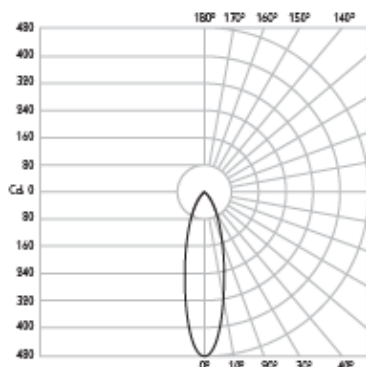

Distance	Beam Diameter	Illuminance (lx)
1m	0.54m	470 lx
2m	1.07m	118 lx
3m	1.61m	52 lx
4m	2.14m	29 lx
5m	2.68m	19 lx

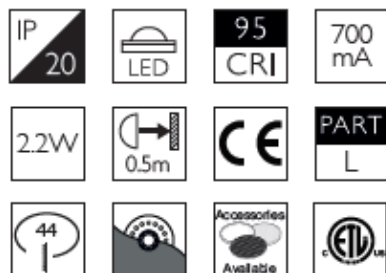

Trimless

TS-651-AL-309530



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA

t. +44 (0) 20 8947 6616
f. +44 (0) 20 8986 6626

WIDE FLOOD



Category Interior use only IP20

Material Machined Aluminium

Cutout $\varnothing 44\text{mm}$

Ceiling Thickness 5-25mm

Minimum Ceiling Void 20mm above top of luminaire module

Accessories Lenses

System Power 2.2W

Module Output 178lm

Absolute Output 163lm

LOR 92%

Colour Temperature 3000K*


CRI Ra: 95 TM-30 Rf: 93 Rg: 99

Optics 60°

Gear Type Dimmable options available




Weight 60g

* Please enquire as to the availability of non-standard colour temperatures.

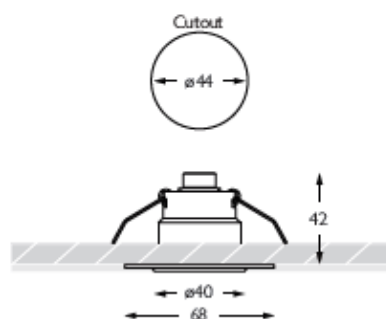

Domino 1 Recessed Trimless is a discreet 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The plaster-in luminaire has a passivated aluminium flange suitable for a 3mm plaster skim, and offers five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Recessed Trimless is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.2W.

Product Photometry independently tested in accordance with LM-79

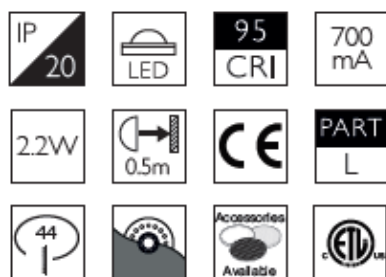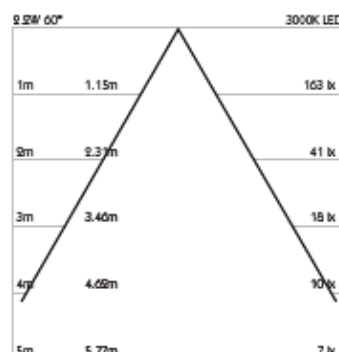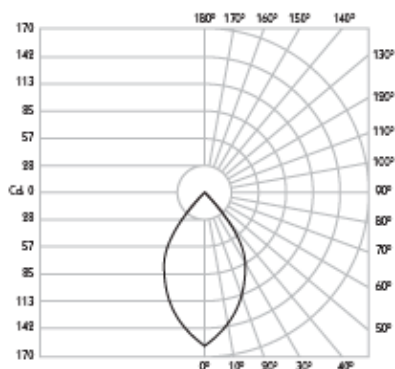

Trimless

TS-051-AL-309550



PRECISION
LIGHTING


SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK



42 RIVERSIDE ROAD
LONDON SW17 0BA

t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

ELLIPSE

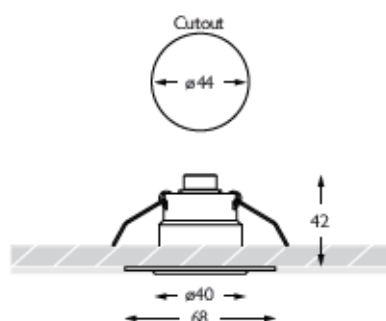

Beam
Orientation

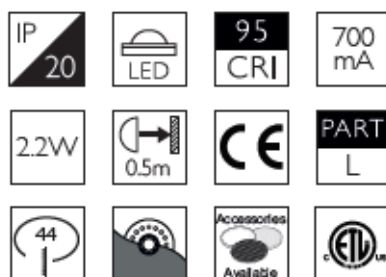


Category Interior use only IP20
Material Machined Aluminium
Cutout ø44mm
Ceiling Thickness 5-25mm
Minimum Ceiling Void 20mm above top of luminaire module
Accessories Lenses
System Power 2.2W
Module Output 178lm
Absolute Output 163lm
LOR 92%
Colour Temperature 3000K*
CRI Ra: 95 TM-30 Rf: 93 Rg: 99
Optics 12X35°
Gear Type Dimmable options available
Weight 60g

* Please enquire as to the availability of non-standard colour temperatures.



Domino 1 Recessed Trimless is a discreet 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The plaster-in luminaire has a passivated aluminium flange suitable for a 3mm plaster skim, and offers five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Recessed Trimless is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.2W.

Product Photometry independently tested in accordance with LM-79

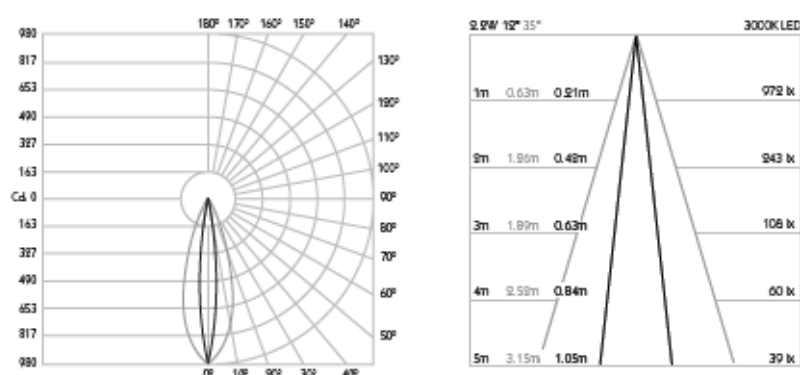

Trimless

TS-651-AL-3005E1



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA

t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

VERTICAL ELLIPSE



Category Interior use only IP20

Material Machined Aluminium

Cutout $\varnothing 44$ mm

Ceiling Thickness 5-25mm

Minimum Ceiling Void 20mm above top of luminaire module

Accessories Lenses

System Power 2.2W

Module Output 178lm

Absolute Output 163lm

LOR 92%

Colour Temperature 3000K*



CRI Ra: 95 **TM-30** Rf: 93 Rg: 99

Optics 35X12°

Gear Type Dimmable options available



Weight 60g

* Please enquire as to the availability of non-standard colour temperatures.

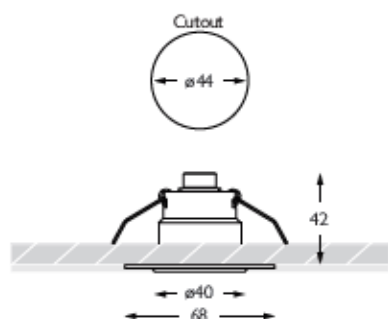

Domino 1 Recessed Trimless is a discreet 95CRI architectural luminaire. The minimal aesthetic, common across the Precision portfolio, ensures the luminaire blends into its architectural surroundings. The plaster-in luminaire has a passivated aluminium flange suitable for a 3mm plaster skim, and offers five changeable optics for flexible distribution. The built-in, anti-reflective, magnetic accessory holder enables glare control and accommodates accessories up to 2mm thick. Domino 1 Recessed Trimless is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 178lm at 2.2W.

Product Photometry independently tested in accordance with LM-79

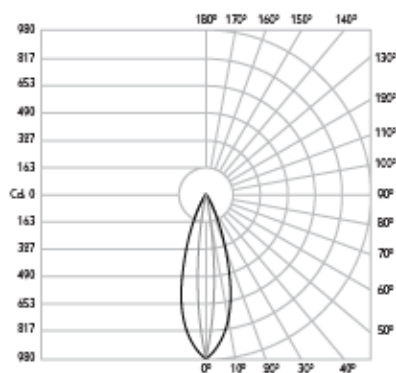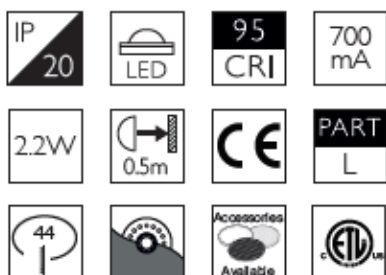

Height	Beam Diameter	Beam Area	Footcandle
1m	0.63m	0.21m	972 lx
2m	1.26m	0.42m	243 lx
3m	1.89m	0.63m	108 lx
4m	2.52m	0.84m	60 lx
5m	3.15m	1.05m	39 lx



Trimless

TS-651-AL-30WSE2



PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW 17 0BA

t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626