


NARROW SPOT




**Category** Interior use only IP20  
**Material** Machined Aluminium  
**Finish** Brushed Aluminium | Black | White | Custom  
**Cutout** ø46mm  
**Ceiling Thickness** 7 - 25mm  
**Minimum Ceiling Void** 20mm spacing above luminaire  
**Pan** 360°  
**Tilt** 30° from centre  
**System Power** 1.6W  
**Module Output** 140lm      **Absolute Output** 125lm  
**LOR** 89%  
**Glare Cut Off** 30° in vertical position  
**Glare Comfort Cut Off** 85° in vertical position  
**Colour Temperature** 3000K | 2700K | \*  
**CRI** Ra: 95      **TM-30** Rf: 93 Rg: 99  
**Optic** 12°  
**Gear Type** Dimmable options available  
**Gear Location** Remote - No access through cutout for dimmable drivers  
**Weight** 89g

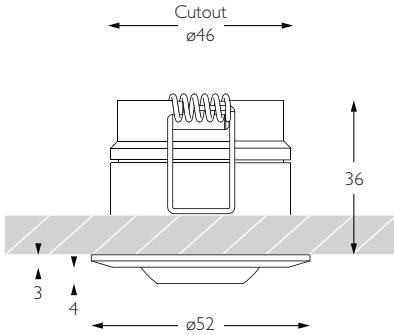


\* Please enquire as to the availability of non-standard Colour Temperatures

Glare Diagram

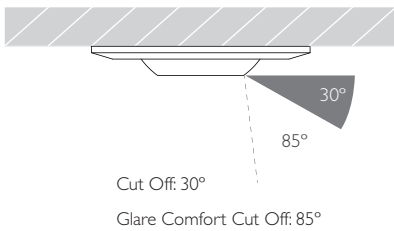

Minimo Eye is a miniature recessed LED luminaire offering 360° pan coupled with 30° tilt to provide high performance accent lighting. With 95CRI, Minimo Eye is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Finishing almost flush with the mounting surface, this recessed luminaire comes as standard in white, black and brushed aluminium finishes. Minimo Eye is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

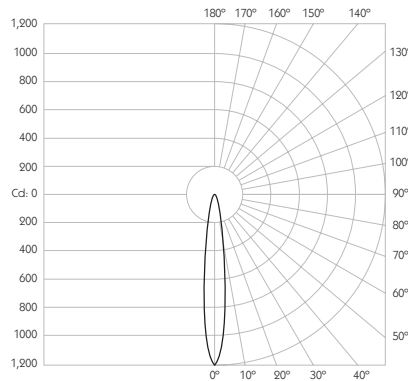

Distance	Beam Diameter	Illuminance (lx)
1m	0.21m	1,193 lx
2m	0.42m	298 lx
3m	0.63m	133 lx
4m	0.84m	75 lx
5m	1.05m	48 lx


IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
360°	30°	46	0.5m



Circular Bezel

Grey	RC-611-AL-XX9512
Black	RC-611-BK-XX9512
White	RC-611-WH-XX9512

FLOOD

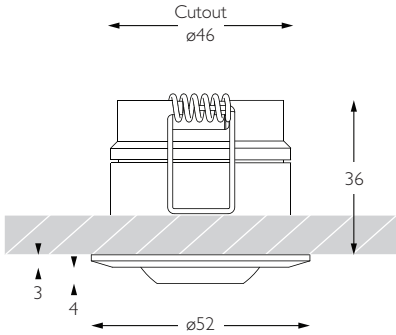


**Category** Interior use only IP20  
**Material** Machined Aluminium  
**Finish** Brushed Aluminium | Black | White | Custom  
**Cutout** ø46mm  
**Ceiling Thickness** 7 - 25mm  
**Minimum Ceiling Void** 20mm spacing above luminaire  
**Pan** 360°  
**Tilt** 30° from centre  
**System Power** 1.6W  
**Module Output** 140lm      **Absolute Output** 114lm  
**LOR** 81%  
**Glare Cut Off** 30° in vertical position  
**Glare Comfort Cut Off** 85° in vertical position  
**Colour Temperature** 3000K | 2700K | \*  
**CRI** Ra: 95      **TM-30** Rf: 93 Rg: 99  
**Optic** 30°  
**Gear Type** Dimmable options available  
**Gear Location** Remote - No access through cutout for dimmable drivers  
**Weight** 89g




\* Please enquire as to the availability of non-standard Colour Temperatures

Glare Diagram

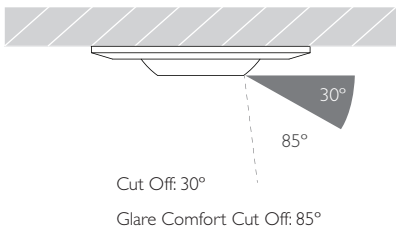


Minimo Eye is a miniature recessed LED luminaire offering 360° pan coupled with 30° tilt to provide high performance accent lighting. With 95CRI, Minimo Eye is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Finishing almost flush with the mounting surface, this recessed luminaire comes as standard in white, black and brushed aluminium finishes. Minimo Eye is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

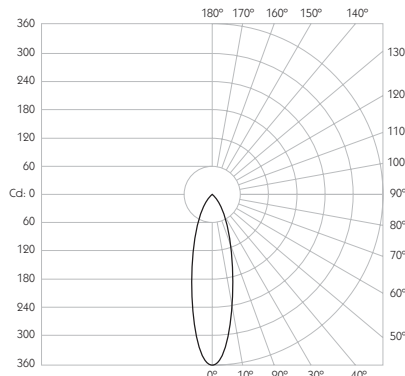

Distance	Beam Diameter	Illuminance (lx)
1m	0.54m	360 lx
2m	1.07m	90 lx
3m	1.61m	40 lx
4m	2.14m	23 lx
5m	2.68m	14 lx


IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
360°	30°	46	0.5m




Circular Bezel

Grey	RC-611-AL-XX9530
Black	RC-611-BK-XX9530
White	RC-611-WH-XX9530

WIDE FLOOD

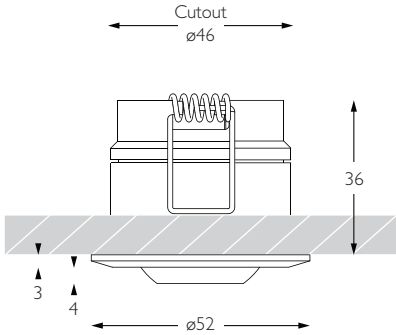

Glare Diagram

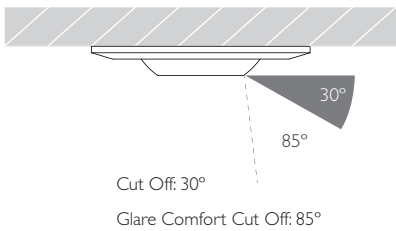


IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
360°	30°	46	0.5m

**Category** Interior use only IP20  
**Material** Machined Aluminium  
**Finish** Brushed Aluminium | Black | White | Custom  
**Cutout** ø46mm  
**Ceiling Thickness** 7 - 25mm  
**Minimum Ceiling Void** 20mm spacing above luminaire  
**Pan** 360°  
**Tilt** 30° from centre  
**System Power** 1.6W  
**Module Output** 140lm      **Absolute Output** 125lm  
**LOR** 89%  
**Glare Cut Off** 30° in vertical position  
**Glare Comfort Cut Off** 85° in vertical position  
**Colour Temperature** 3000K | 2700K | \*  
**CRI** Ra: 95      **TM-30** Rf: 93 Rg: 99  
**Optic** 60°  
**Gear Type** Dimmable options available  
**Gear Location** Remote - No access through cutout for dimmable drivers  
**Weight** 89g


\* Please enquire as to the availability of non-standard Colour Temperatures

Minimo Eye is a miniature recessed LED luminaire offering 360° pan coupled with 30° tilt to provide high performance accent lighting. With 95CRI, Minimo Eye is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Finishing almost flush with the mounting surface, this recessed luminaire comes as standard in white, black and brushed aluminium finishes. Minimo Eye is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

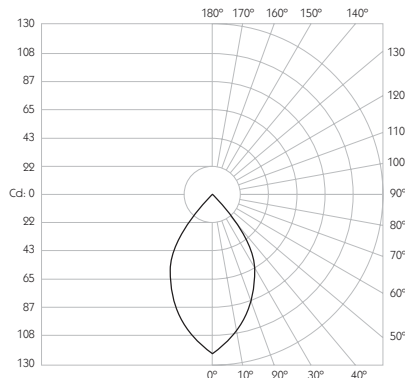

Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	1.15m	125 lx
2m	2.31m	31 lx
3m	3.46m	14 lx
4m	4.62m	8 lx
5m	5.77m	5 lx



Circular Bezel

RC-611-AL-XX9560
RC-611-BK-XX9560
RC-611-WH-XX9560