

MINIMO FIXED CIRCULAR

luminaires
spec sheet 602

DEEP RECESS | NARROW SPOT



Category Interior use only IP20

Material Machined Aluminium | Machined Brass

Finish Aluminium | Rubbed Bronze | Polished Brass | Black | White | Custom

Cutout ø33mm

Ceiling Thickness 3 - 25mm

Minimum Ceiling Void 20mm above top of luminaire module

System Power 1.6W

Module Output 140lm **Absolute Output** 124lm

LOR 89%

Glare Cut Off 30°

Glare Comfort Cut Off 68°

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optic 12°

Gear Type Dimmable options available


Gear Location Remote - No access through cutout for dimmable drivers

Weight AL BK WH - 53g | RB PB - 101g

* Please enquire as to the availability of non-standard Colour Temperatures

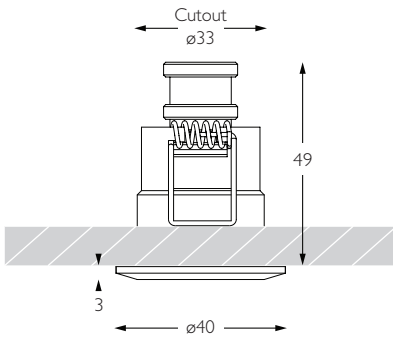


Glare Diagram

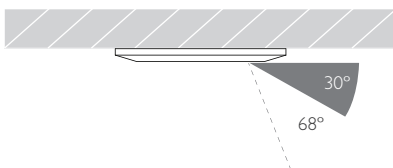

Cut Off: 30°
Glare Comfort Cut Off: 68°

Minimo Fixed Circular is a miniature recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed is machined from aerospace grade 6063-T6 aluminium or brass, and is available as standard in white, black, polished brass, rubbed bronze and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

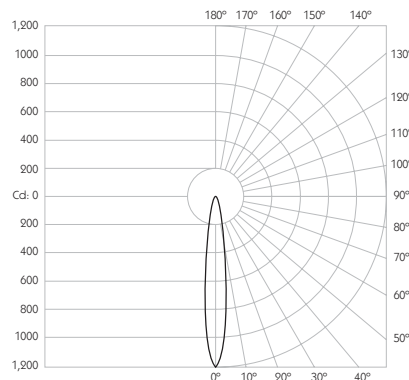

Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	0.21m	1,193 lx
2m	0.42m	298 lx
3m	0.63m	133 lx
4m	0.84m	75 lx
5m	1.05m	48 lx

IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
33	0.5m		



Circular Bezel

Grey	RC-602-AL-XX9512
Black	RC-602-RB-XX9512
Polished Brass	RC-602-PB-XX9512
Rubbed Bronze	RC-602-BK-XX9512
White	RC-602-WH-XX9512

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

MINIMO FIXED CIRCULAR

DEEP RECESS | FLOOD



Category Interior use only IP20

Material Machined Aluminium | Machined Brass

Finish Aluminium | Rubbed Bronze | Polished Brass | Black | White | Custom

Cutout ø33mm

Ceiling Thickness 3 - 25mm

Minimum Ceiling Void 20mm above top of luminaire module

System Power 1.6W

Module Output 140lm **Absolute Output** 113lm

LOR 81%

Glare Cut Off 30°

Glare Comfort Cut Off 68°

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optic 30°

Gear Type Dimmable options available


Gear Location Remote - No access through cutout for dimmable drivers

Weight AL BK WH - 53g | RB PB - 101g

* Please enquire as to the availability of non-standard Colour Temperatures

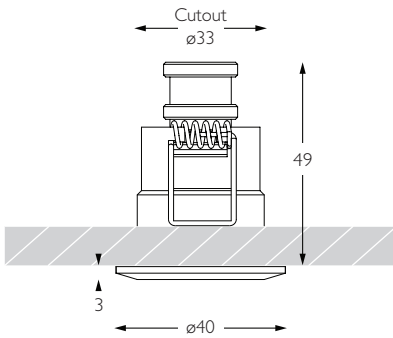



Glare Diagram

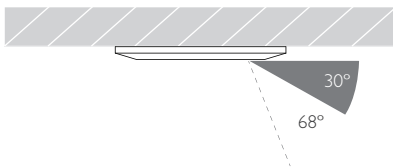

Cut Off: 30°
Glare Comfort Cut Off: 68°

Minimo Fixed Circular is a miniature recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed is machined from aerospace grade 6063-T6 aluminium or brass, and is available as standard in white, black, polished brass, rubbed bronze and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

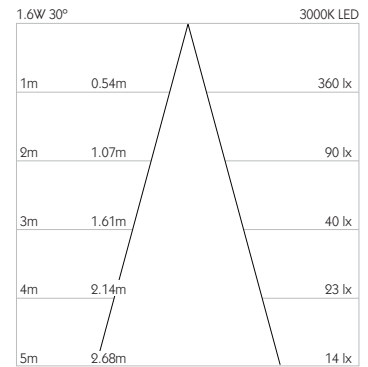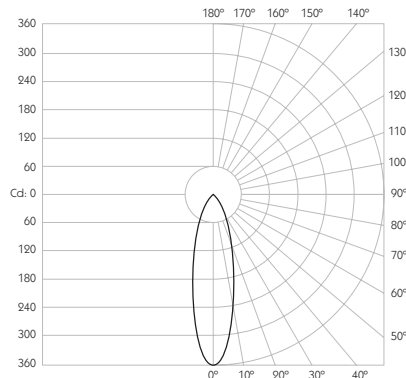

IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
33	0.5m		



Circular Bezel

Grey	RC-602-AL-XX9530
Black	RC-602-RB-XX9530
White	RC-602-PB-XX9530
Polished Brass	RC-602-BK-XX9530
Brushed Aluminium	RC-602-WH-XX9530

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

MINIMO FIXED CIRCULAR

DEEP RECESS | WIDE FLOOD



Category Interior use only IP20

Material Machined Aluminium | Machined Brass

Finish Aluminium | Rubbed Bronze | Polished Brass | Black | White | Custom

Cutout ø33mm

Ceiling Thickness 3 - 25mm

Minimum Ceiling Void 20mm above top of luminaire module

System Power 1.6W

Module Output 140lm **Absolute Output** 124lm

LOR 89%

Glare Cut Off 30°

Glare Comfort Cut Off 68°

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optic 60°

Gear Type Dimmable options available


Gear Location Remote - No access through cutout for dimmable drivers

Weight AL BK WH - 53g | RB PB - 101g

* Please enquire as to the availability of non-standard Colour Temperatures

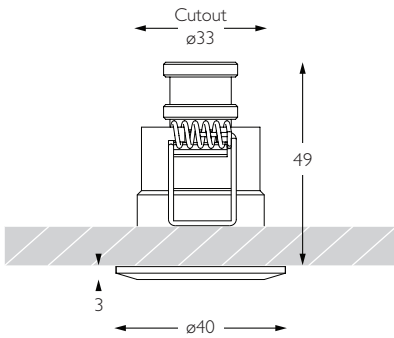


Glare Diagram

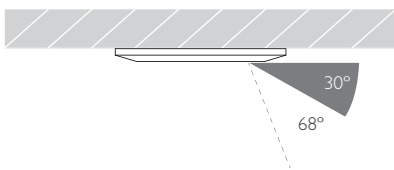

Cut Off: 30°
Glare Comfort Cut Off: 68°

Minimo Fixed Circular is a miniature recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed is machined from aerospace grade 6063-T6 aluminium or brass, and is available as standard in white, black, polished brass, rubbed bronze and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

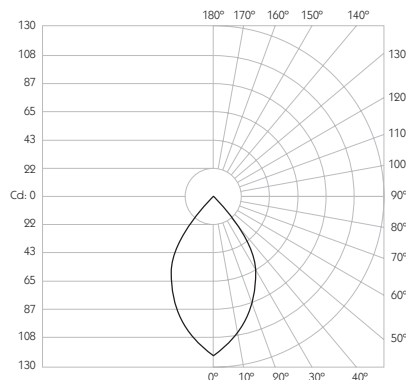

Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	1.15m	125 lx
2m	2.31m	31 lx
3m	3.46m	14 lx
4m	4.62m	8 lx
5m	5.77m	5 lx

IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
33	0.5m		



Circular Bezel

RC-602-AL-XX9560	
RC-602-RB-XX9560	
RC-602-PB-XX9560	
RC-602-BK-XX9560	
RC-602-WH-XX9560	

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626