

# MINIMO FIXED CIRCULAR

luminaires  
spec sheet 601

NARROW SPOT



**Category** Interior use only IP20

**Material** Machined Aluminium | Machined Brass

**Finish** Aluminium | Rubbed Bronze | Polished Brass | Black | White | Custom

**Cutout** ø33mm

**Ceiling Thickness** 3 - 25mm

**Minimum Ceiling Void** 20mm above top of luminaire module

**System Power** 1.6W

**Module Output** 140lm      **Absolute Output** 125lm

**LOR** 89%

**Glare Cut Off** 15°

**Glare Comfort Cut Off** 45°

**Colour Temperature** 3000K | 2700K | \*

**CRI** Ra: 95      **TM-30** Rf: 93 Rg: 99


**Optic** 12°

**Gear Type** Dimmable options available


**Gear Location** Remote - No access through cutout for dimmable drivers

**Weight** AL BK WH - 51g | RB PB - 99g

\* Please enquire as to the availability of non-standard Colour Temperatures

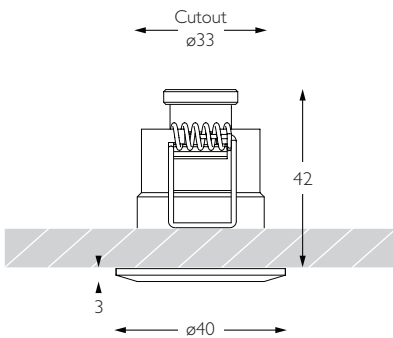


Glare Diagram

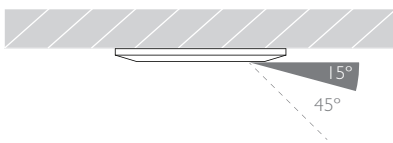


Cut Off: 15°

Glare Comfort Cut Off: 45°

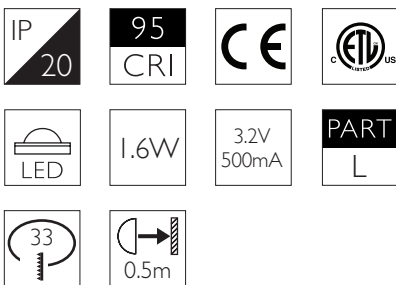

Minimo Fixed Circular is a miniature recessed LED luminaire providing high performance accent lighting from a compact source. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed is machined from aerospace grade 6063-T6 aluminium or brass, is available as standard in white, black, polished brass, rubbed bronze and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

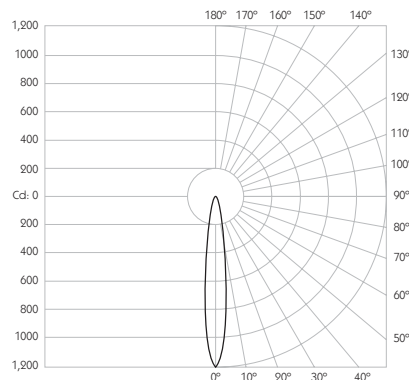

Distance	Beam Diameter	Lumen Output
1m	0.21m	1,193 lx
2m	0.42m	298 lx
3m	0.63m	133 lx
4m	0.84m	75 lx
5m	1.05m	48 lx



Circular Bezel



RC-601-AL-XX9512

RC-601-RB-XX9512

RC-601-PB-XX9512

RC-601-BK-XX9512

RC-601-WH-XX9512

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

**PRECISION  
LIGHTING**

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

FLOOD



**Category** Interior use only IP20

**Material** Machined Aluminium | Machined Brass

**Finish** Aluminium | Rubbed Bronze | Polished Brass | Black | White | Custom

**Cutout** ø33mm

**Ceiling Thickness** 3 - 25mm

**Minimum Ceiling Void** 20mm above top of luminaire module

**System Power** 1.6W

**Module Output** 140lm      **Absolute Output** 114lm

**LOR** 81%

**Glare Cut Off** 15°

**Glare Comfort Cut Off** 45°

**Colour Temperature** 3000K | 2700K | \*

**CRI** Ra: 95      **TM-30** Rf: 93 Rg: 99


**Optic** 30°

**Gear Type** Dimmable options available


**Gear Location** Remote - No access through cutout for dimmable drivers

**Weight** AL BK WH - 51g | RB PB - 99g

\* Please enquire as to the availability of non-standard Colour Temperatures

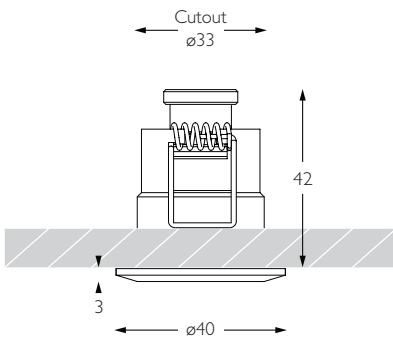


Glare Diagram

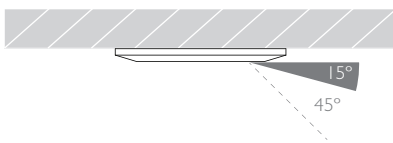


Cut Off: 15°

Glare Comfort Cut Off: 45°

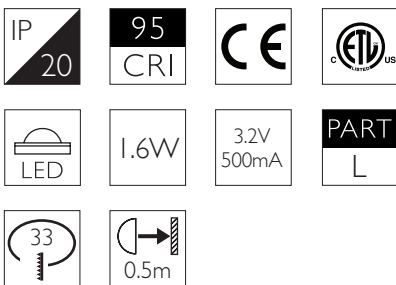

Minimo Fixed Circular is a miniature recessed LED luminaire providing high performance accent lighting from a compact source. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed is machined from aerospace grade 6063-T6 aluminium or brass, is available as standard in white, black, polished brass, rubbed bronze and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

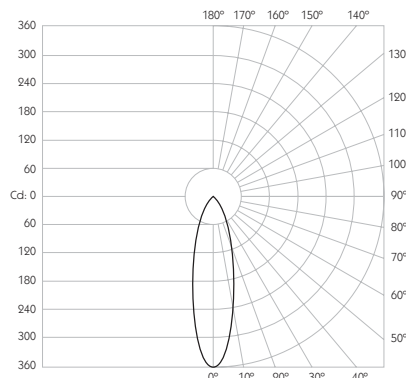

Height	Beam Diameter	Illuminance (lx)
1m	0.54m	360 lx
2m	1.07m	90 lx
3m	1.61m	40 lx
4m	2.14m	23 lx
5m	2.68m	14 lx



Circular Bezel

	RC-601-AL-XX9530
	RC-601-RB-XX9530
	RC-601-PB-XX9530
	RC-601-BK-XX9530
	RC-601-WH-XX9530

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

**PRECISION  
LIGHTING**

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

WIDE FLOOD



**Category** Interior use only IP20

**Material** Machined Aluminium | Machined Brass

**Finish** Aluminium | Rubbed Bronze | Polished Brass | Black | White | Custom

**Cutout** ø33mm

**Ceiling Thickness** 3 - 25mm

**Minimum Ceiling Void** 20mm above top of luminaire module

**System Power** 1.6W

**Module Output** 140lm      **Absolute Output** 125lm

**LOR** 89%

**Glare Cut Off** 15°

**Glare Comfort Cut Off** 45°

**Colour Temperature** 3000K | 2700K | \*

**CRI** Ra: 95      **TM-30** Rf: 93 Rg: 99


**Optic** 60°

**Gear Type** Dimmable options available


**Gear Location** Remote - No access through cutout for dimmable drivers

**Weight** AL BK WH - 51g | RB PB - 99g

\* Please enquire as to the availability of non-standard Colour Temperatures

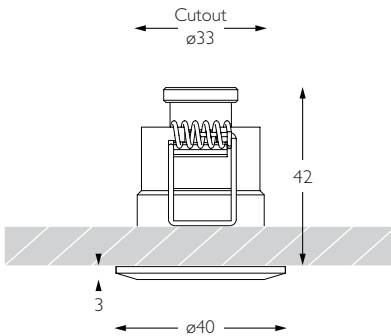

Glare Diagram

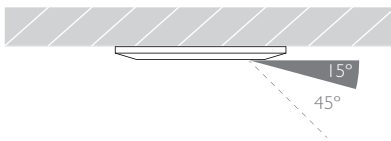



Cut Off: 15°

Glare Comfort Cut Off: 45°

IP 20	95 CRI	CE	ETL US
LED	1.6W	3.2V 500mA	PART L
33	0.5m		

Minimo Fixed Circular is a miniature recessed LED luminaire providing high performance accent lighting from a compact source. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed is machined from aerospace grade 6063-T6 aluminium or brass, is available as standard in white, black, polished brass, rubbed bronze and brushed aluminium finishes, and delivers a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

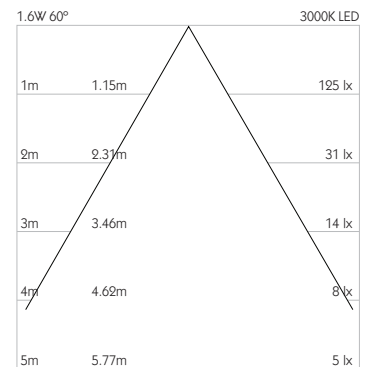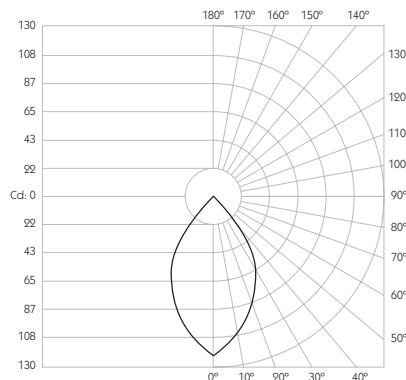

Circular Bezel

RC-601-AL-XX9560	
RC-601-RB-XX9560	
RC-601-PB-XX9560	
RC-601-BK-XX9560	
RC-601-WH-XX9560	

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27