

MINIMO FIXED TRIMLESS

DEEP RECESS | NARROW SPOT



Category Interior use only IP20

Material Machined Aluminium

Trim Plaster-in Trimless

Cutout ø33mm

Ceiling Thickness 5 - 25mm

Minimum Ceiling Void 20mm above top of luminaire module

System Power 1.6W

Module Output 140lm **Absolute Output** 124lm

LOR 89%

Glare Cut Off 30°

Glare Comfort Cut Off 68°

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optic 12°

Gear Type Dimmable options available


Gear Location Remote - No access through cutout for dimmable drivers

Weight 42g

* Please enquire as to the availability of non-standard Colour Temperatures

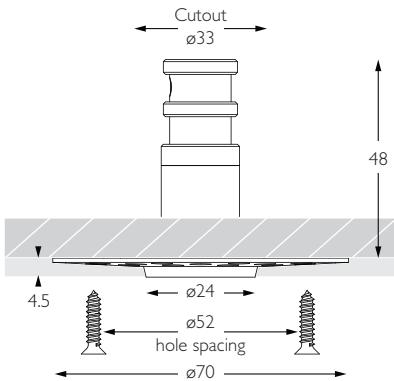


Glare Diagram

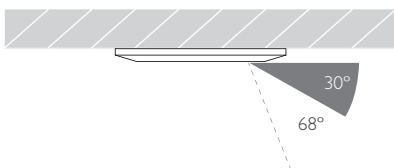

Cut Off: 30°
Glare Comfort Cut Off: 68°

Minimo Fixed Trimless is a miniature recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. With an aperture of just ø24mm, Minimo Fixed Trimless is the most discreet fixture in the Precision Lighting range. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed Trimless is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

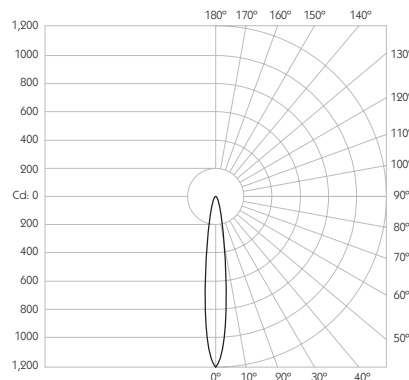

Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	0.21m	1,193 lx
2m	0.42m	298 lx
3m	0.63m	133 lx
4m	0.84m	75 lx
5m	1.05m	48 lx

IP 20

95 CRI

CE

ETL US

LED

1.6W

3.2V 500mA

PART L


33

[Image]



Trimless

RCT-602-AL-XX9512

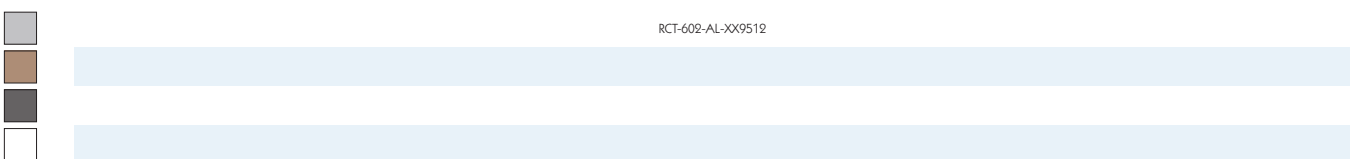

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

MINIMO FIXED TRIMLESS

DEEP RECESS | FLOOD



Category Interior use only IP20

Material Machined Aluminium

Trim Plaster-in Trimless

Cutout ø33mm

Ceiling Thickness 5 - 25mm

Minimum Ceiling Void 20mm above top of luminaire module

System Power 1.6W

Module Output 140lm **Absolute Output** 113lm

LOR 81%

Glare Cut Off 30°

Glare Comfort Cut Off 68°

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optic 30°

Gear Type Dimmable options available


Gear Location Remote - No access through cutout for dimmable drivers

Weight 42g

* Please enquire as to the availability of non-standard Colour Temperatures

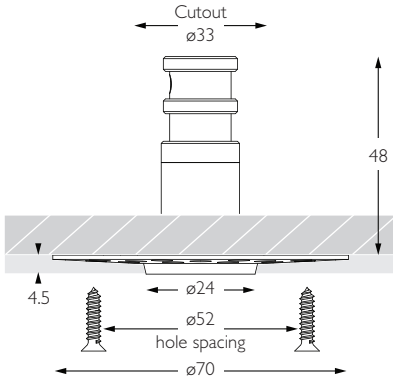




Glare Diagram

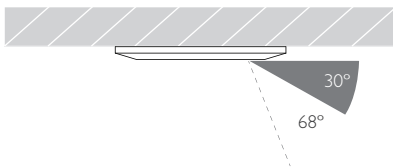

Cut Off: 30°
Glare Comfort Cut Off: 68°


Minimo Fixed Trimless is a miniature recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. With an aperture of just ø24mm, Minimo Fixed Trimless is the most discreet fixture in the Precision Lighting range. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed Trimless is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

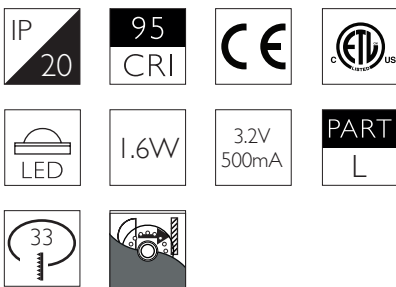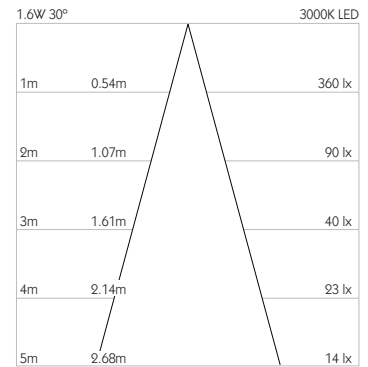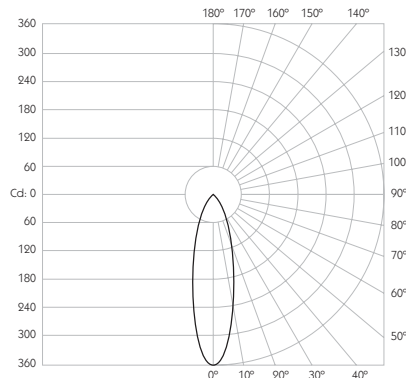

Trimless

RCT-602-AL-XX9530

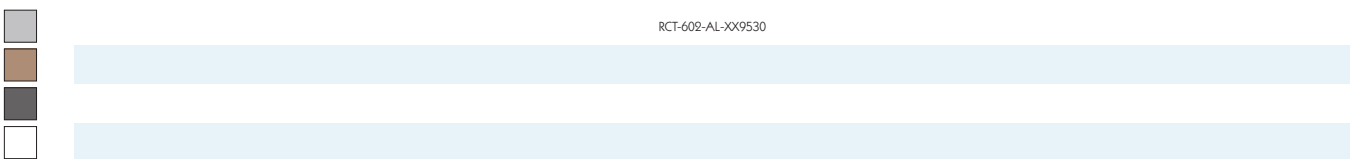

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

MINIMO FIXED TRIMLESS

DEEP RECESS | WIDE FLOOD



Category Interior use only IP20

Material Machined Aluminium

Trim Plaster-in Trimless

Cutout ø33mm

Ceiling Thickness 5 - 25mm

Minimum Ceiling Void 20mm above top of luminaire module

System Power 1.6W

Module Output 140lm **Absolute Output** 124lm

LOR 89%

Glare Cut Off 30°

Glare Comfort Cut Off 68°

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optic 60°

Gear Type Dimmable options available


Gear Location Remote - No access through cutout for dimmable drivers

Weight 42g


* Please enquire as to the availability of non-standard Colour Temperatures

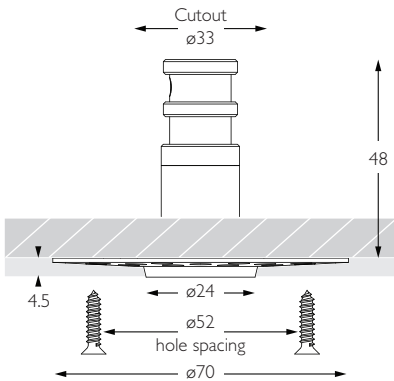

Glare Diagram

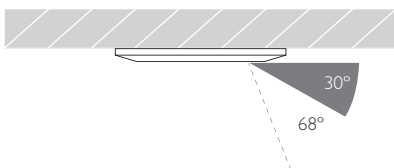


Cut Off: 30°
Glare Comfort Cut Off: 68°

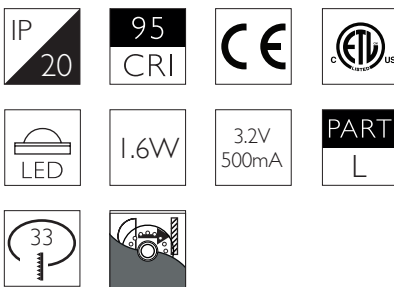

Minimo Fixed Trimless is a miniature recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. With an aperture of just ø24mm, Minimo Fixed Trimless is the most discreet fixture in the Precision Lighting range. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed Trimless is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

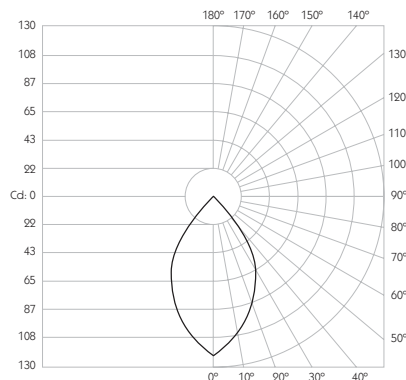


Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	1.15m	125 lx
2m	2.31m	31 lx
3m	3.46m	14 lx
4m	4.62m	8 lx
5m	5.77m	5 lx



Trimless

RCT-602-AL-XX9560

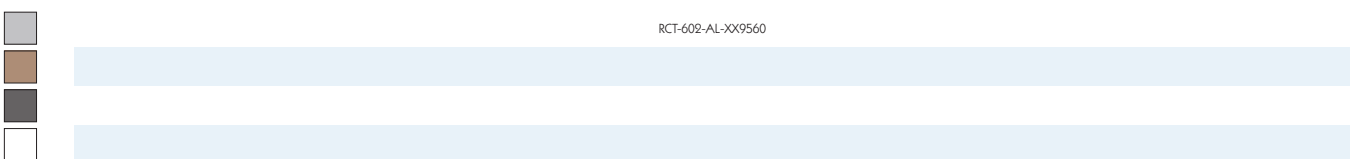

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27