

MINIMO FIXED TRIMLESS

luminaires
spec sheet 601

NARROW SPOT



Category Interior use only IP20

Material Machined Aluminium

Trim Plaster-in Trimless

Cutout ø33mm

Ceiling Thickness 5 - 25mm

Minimum Ceiling Void 20mm above top of luminaire module

System Power 1.6W

Module Output 140lm **Absolute Output** 125lm

LOR 89%

Glare Cut Off 15°

Glare Comfort Cut Off 45°

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optic 12°

Gear Type Dimmable options available


Gear Location Remote - No access through cutout for dimmable drivers

Weight 40g


* Please enquire as to the availability of non-standard Colour Temperatures

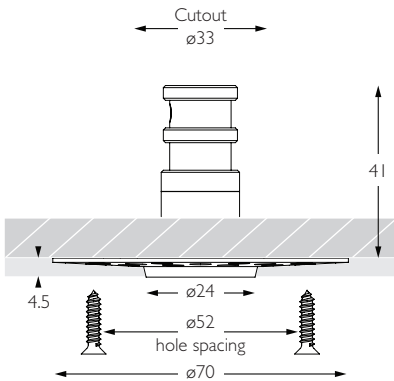

Glare Diagram

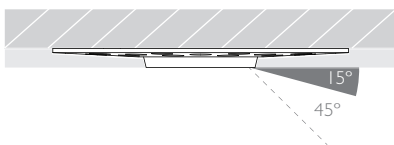


Cut Off: 15°
Glare Comfort Cut Off: 45°

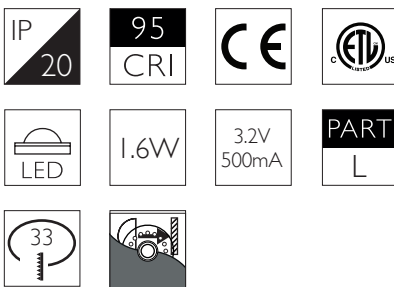

Minimo Fixed Trimless is a miniature recessed LED luminaire providing high performance accent lighting from a compact source. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. With an aperture of just ø24mm, Minimo Fixed Trimless is the most discreet fixture in the Precision Lighting range. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed Trimless is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

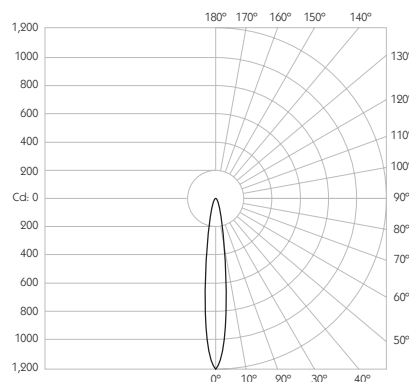


| Distance (m) | Beam Diameter (m) | Footcandle (lx) |
|--------------|-------------------|-----------------|
| 1m | 0.21m | 1,193 lx |
| 2m | 0.42m | 298 lx |
| 3m | 0.63m | 133 lx |
| 4m | 0.84m | 75 lx |
| 5m | 1.05m | 48 lx |



Trimless

RCT-601-AL-XX9512

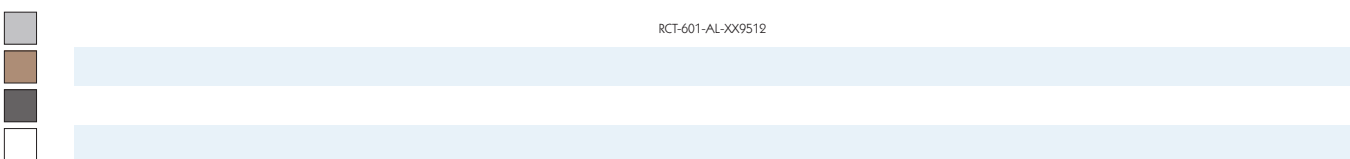

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626

MINIMO FIXED TRIMLESS

FLOOD



Category Interior use only IP20

Material Machined Aluminium

Trim Plaster-in Trimless

Cutout ø33mm

Ceiling Thickness 5 - 25mm

Minimum Ceiling Void 20mm above top of luminaire module

System Power 1.6W

Module Output 140lm **Absolute Output** 114lm

LOR 81%

Glare Cut Off 15°

Glare Comfort Cut Off 45°

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optic 30°

Gear Type Dimmable options available


Gear Location Remote - No access through cutout for dimmable drivers

Weight 40g


* Please enquire as to the availability of non-standard Colour Temperatures

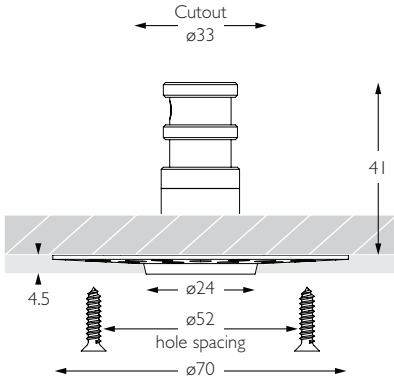

Glare Diagram

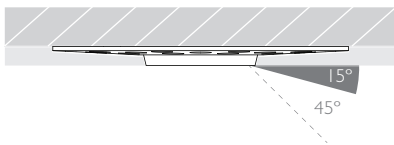


Cut Off: 15°
Glare Comfort Cut Off: 45°

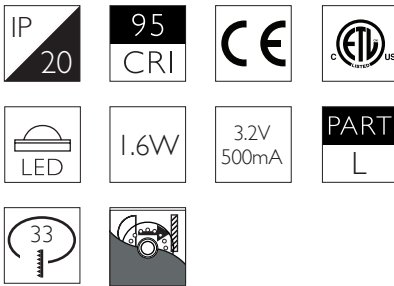

Minimo Fixed Trimless is a miniature recessed LED luminaire providing high performance accent lighting from a compact source. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. With an aperture of just ø24mm, Minimo Fixed Trimless is the most discreet fixture in the Precision Lighting range. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed Trimless is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

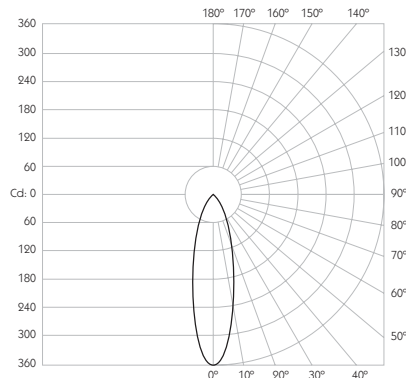


| Distance (m) | Beam Diameter (m) | Illuminance (lx) |
|--------------|-------------------|------------------|
| 1m | 0.54m | 360 lx |
| 2m | 1.07m | 90 lx |
| 3m | 1.61m | 40 lx |
| 4m | 2.14m | 23 lx |
| 5m | 2.68m | 14 lx |



Trimless

RCT-601-AL-XX9530

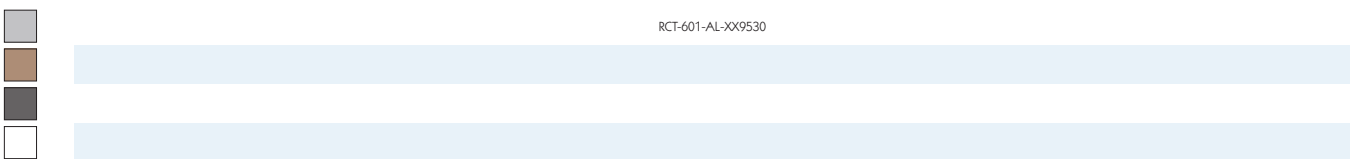

MINIMO FIXED TRIMLESS

WIDE FLOOD



Category Interior use only IP20

Material Machined Aluminium

Trim Plaster-in Trimless

Cutout ø33mm

Ceiling Thickness 5 - 25mm

Minimum Ceiling Void 20mm above top of luminaire module

System Power 1.6W

Module Output 140lm **Absolute Output** 125lm

LOR 89%

Glare Cut Off 15°

Glare Comfort Cut Off 45°

Colour Temperature 3000K | 2700K | *

CRI Ra: 95 **TM-30** Rf: 93 Rg: 99


Optic 60°

Gear Type Dimmable options available


Gear Location Remote - No access through cutout for dimmable drivers

Weight 40g


* Please enquire as to the availability of non-standard Colour Temperatures

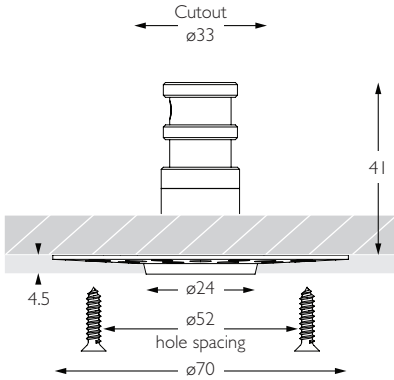

Glare Diagram

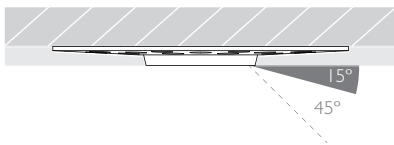


Cut Off: 15°
Glare Comfort Cut Off: 45°

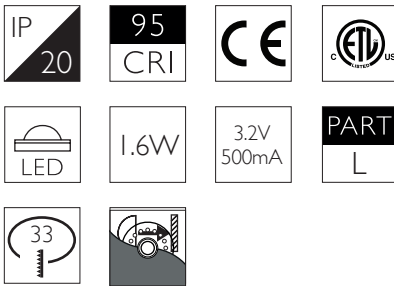

Minimo Fixed Trimless is a miniature recessed LED luminaire providing high performance accent lighting from a compact source. With 95CRI, Minimo Fixed is perfect for use in colour-critical applications. With an aperture of just ø24mm, Minimo Fixed Trimless is the most discreet fixture in the Precision Lighting range. Tool-less, site changeable optics allow flexibility in varying environments. Minimo Fixed Trimless is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

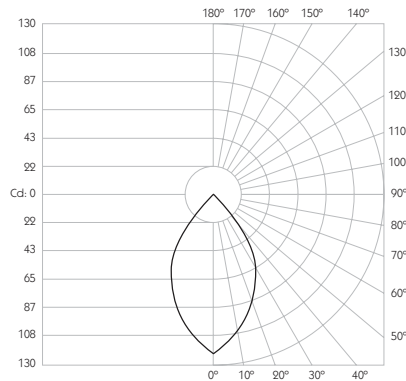


| Distance (m) | Beam Diameter (m) | Illuminance (lx) |
|--------------|-------------------|------------------|
| 1m | 1.15m | 125 lx |
| 2m | 2.31m | 31 lx |
| 3m | 3.46m | 14 lx |
| 4m | 4.62m | 8 lx |
| 5m | 5.77m | 5 lx |



Trimless

RCT-601-AL-XX9560

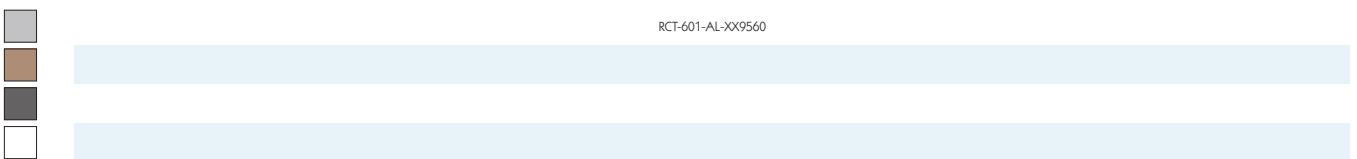

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27