



# MINIMO 16 | FIXED

Luminaires  
spec sheet RCD-632

ULTRA NARROW SPOT | FLAT BEZEL | PINHOLE APERTURE

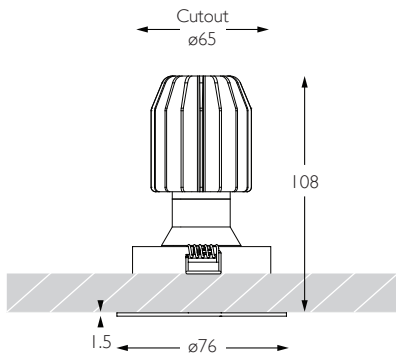


Glare Diagram

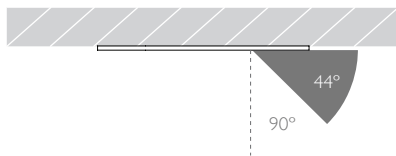

Cut Off: 44°

Glare Comfort Cut Off: 90°

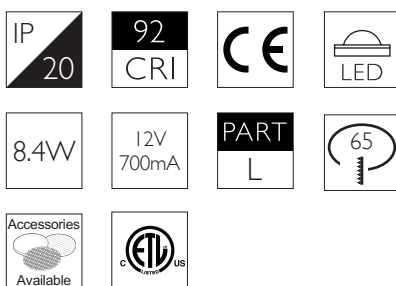

## Technical Description

Minimo 16 Fixed is a recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. Minimo 16 is perfect for use in colour-critical applications with 92CRI delivered from a single source LED module and available in two colour temperatures as standard. Tool-less, site changeable beam angles allow flexibility in varying environments. Machined from aerospace grade 6063-T6 aluminium, Minimo 16 Fixed features a flat, discreet bezel and 33mm pinhole aperture for a minimal and extremely low glare solution. Minimo 16 Fixed delivers a lumen package of 665lm at 8.4W.

## Mechanical

**Category** Interior use only IP20

**Material** Machined Aluminium

**Configuration** Flat | Pinhole Aperture

**Cutout**  $\varnothing$ 65mm

**Ceiling Thickness** 3 - 25mm

**Ceiling Void** 20mm above module

**Weight** 262g

## Finishes

**Finishes** Black | White \*

\* Please enquire as to the availability of non-standard Finishes

## Optical

**System Power** 8.4W

**Module Output** 665lm\*\*

**Absolute Output** 656lm\*\*

**LOR** 99%

**Glare Cut Off** 44°

**Glare Comfort Cut Off** 90°

\*\* Photometry shown is correct for 3000K module. Please enquire for 2700K module output.

**Colour Temperature** 2700K | 3000K

**CRI** 92 Typ


**TM-30** Rf: 90 Rg: 99

**Beam Angle** 9°

**Gear Type** Dimmable Options Available

**Gear Location** Remote

Product Photometry independently tested in accordance with LM-79

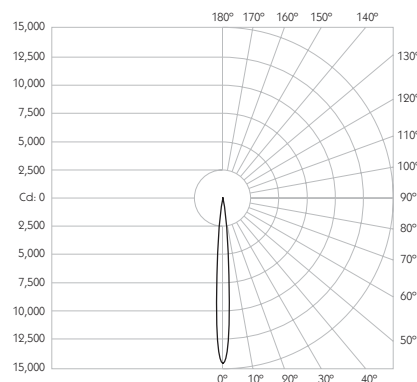

Distance	Beam Diameter	Illuminance (lx)
1m	0.16m	14,533 lx
2m	0.31m	3,633 lx
3m	0.47m	1,615 lx
4m	0.63m	908 lx
5m	0.79m	581 lx

Luminaire Code

RCD-632

Finish

BK

Black

WH

White

CCT

27

2700K

30

3000K

CRI

92

92 CRI

Beam Angle

09

9° Ultra Narrow Spot

RCD-632

92

09

PRECISION  
LIGHTING


SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK


42 RIVERSIDE ROAD  
LONDON SW17 0BA

t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

Version 10.16

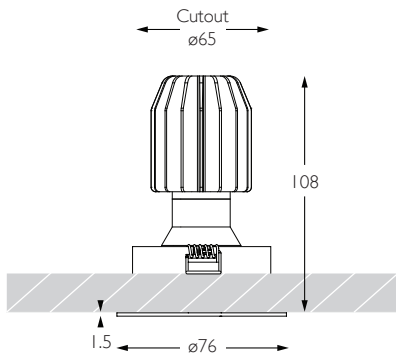


Glare Diagram

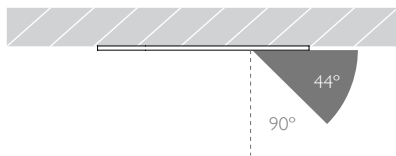

Cut Off: 44°

Glare Comfort Cut Off: 90°

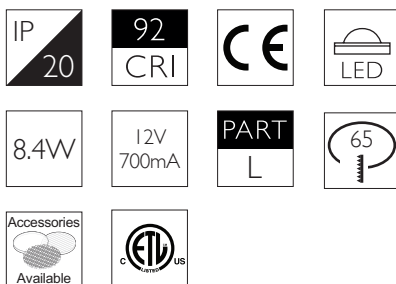

## Technical Description

Minimo 16 Fixed is a recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. Minimo 16 is perfect for use in colour-critical applications with 92CRI delivered from a single source LED module and available in two colour temperatures as standard. Tool-less, site changeable beam angles allow flexibility in varying environments. Machined from aerospace grade 6063-T6 aluminium, Minimo 16 Fixed features a flat, discreet bezel and 33mm pinhole aperture for a minimal and extremely low glare solution. Minimo 16 Fixed delivers a lumen package of 665lm at 8.4W.

## Mechanical

**Category** Interior use only IP20

**Material** Machined Aluminium

**Configuration** Flat | Pinhole Aperture

**Cutout**  $\varnothing$ 65mm

**Ceiling Thickness** 3 - 25mm

**Ceiling Void** 20mm above module

**Weight** 262g

## Finishes

**Finishes** Black | White \*

\* Please enquire as to the availability of non-standard Finishes

## Optical

**System Power** 8.4W

**Module Output** 665lm\*\*

**Absolute Output** 653lm\*\*

**LOR** 98%

**Glare Cut Off** 44°

**Glare Comfort Cut Off** 90°

\*\* Photometry shown is correct for 3000K module. Please enquire for 2700K module output.

**Colour Temperature** 2700K | 3000K

**CRI** 92 Typ


**TM-30** Rf: 90 Rg: 99

**Beam Angle** 11°

**Gear Type** Dimmable Options Available

**Gear Location** Remote

Product Photometry independently tested in accordance with LM-79

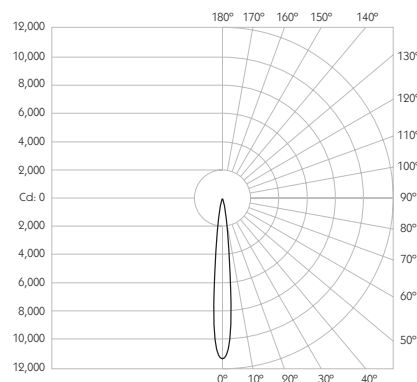

Distance (m)	Beam Diameter (m)	Illuminance (lx)
1m	0.19m	11,164 lx
2m	0.39m	2,791 lx
3m	0.58m	1,240 lx
4m	0.77m	698 lx
5m	0.96m	447 lx

Luminaire Code

RCD-632

Finish

BK

Black

WH

White

CCT

27

2700K

30

3000K

CRI

92

92 CRI

Beam Angle

11

11° Narrow Spot

RCD-632


92

11


# MINIMO 16 | FIXED

Luminaires  
spec sheet RCD-632

SPOT | FLAT BEZEL | PINHOLE APERTURE

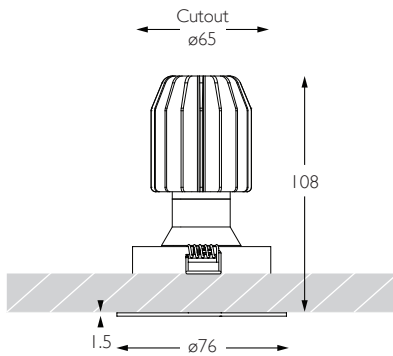


Glare Diagram

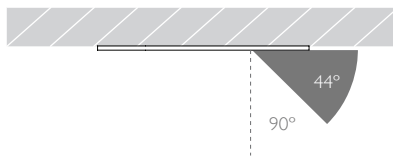

Cut Off: 44°

Glare Comfort Cut Off: 90°

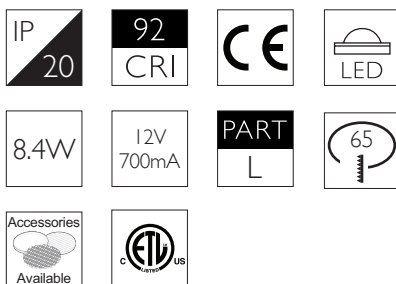

## Technical Description

Minimo 16 Fixed is a recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. Minimo 16 is perfect for use in colour-critical applications with 92CRI delivered from a single source LED module and available in two colour temperatures as standard. Tool-less, site changeable beam angles allow flexibility in varying environments. Machined from aerospace grade 6063-T6 aluminium, Minimo 16 Fixed features a flat, discreet bezel and 33mm pinhole aperture for a minimal and extremely low glare solution. Minimo 16 Fixed delivers a lumen package of 665lm at 8.4W.

## Mechanical

**Category** Interior use only IP20  
**Material** Machined Aluminium  
**Configuration** Flat | Pinhole Aperture  
**Cutout**  $\varnothing$ 65mm

**Ceiling Thickness** 3 - 25mm  
**Ceiling Void** 20mm above module  
**Weight** 262g

## Finishes

**Finishes** Black | White \*  
 \* Please enquire as to the availability of non-standard Finishes


## Optical

**System Power** 8.4W  
**Module Output** 665lm\*\*  
**Absolute Output** 656lm\*\*  
**LOR** 99%  
**Glare Cut Off** 44°  
**Glare Comfort Cut Off** 90°

**Colour Temperature** 2700K | 3000K  
**CRI** 92 Typ  
**TM-30** Rf: 90 Rg: 99  
**Beam Angle** 15°  
**Gear Type** Dimmable Options Available  
**Gear Location** Remote

\*\* Photometry shown is correct for 3000K module. Please enquire for 2700K module output.

Product Photometry independently tested in accordance with LM-79

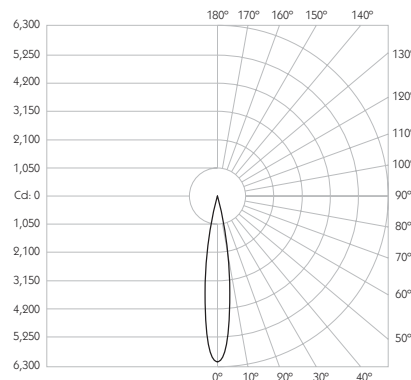

Distance	Beam Diameter	Illuminance (lx)
1m	0.26m	6,047 lx
2m	0.53m	1,152 lx
3m	0.79m	672 lx
4m	1.05m	378 lx
5m	1.32m	242 lx

## Configuration Options

Luminaire Code	Finish	CCT	CRI	Beam Angle
RCD-632	<b>BK</b> Black <b>WH</b> White	<b>27</b> 2700K <b>30</b> 3000K	<b>92</b> 92 CRI	<b>15</b> 15° Spot

RCD-632	-	-	92	15
---------	---	---	----	----

PRECISION  
LIGHTING


SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA  
t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626


# MINIMO 16 | FIXED

Luminaires  
spec sheet RCD-632

FLOOD | FLAT BEZEL | PINHOLE APERTURE

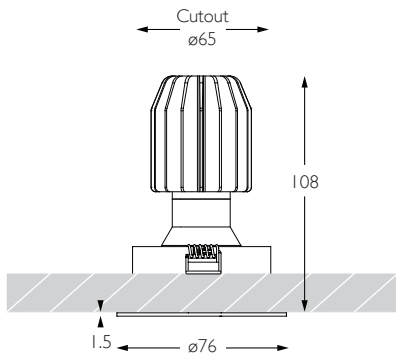


Glare Diagram

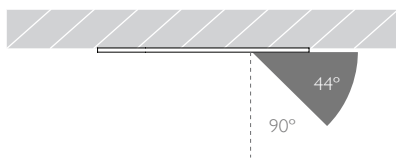

Cut Off: 44°

Glare Comfort Cut Off: 90°

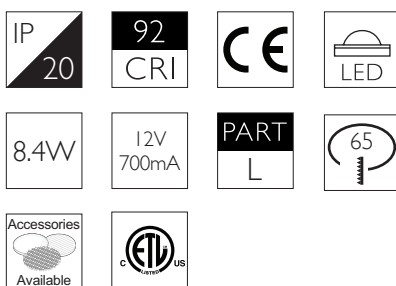

## Technical Description

Minimo 16 Fixed is a recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. Minimo 16 is perfect for use in colour-critical applications with 92CRI delivered from a single source LED module and available in two colour temperatures as standard. Tool-less, site changeable beam angles allow flexibility in varying environments. Machined from aerospace grade 6063-T6 aluminium, Minimo 16 Fixed features a flat, discreet bezel and 33mm pinhole aperture for a minimal and extremely low glare solution. Minimo 16 Fixed delivers a lumen package of 665lm at 8.4W.

## Mechanical

**Category** Interior use only IP20  
**Material** Machined Aluminium  
**Configuration** Flat | Pinhole Aperture  
**Cutout**  $\varnothing$ 65mm

**Ceiling Thickness** 3 - 25mm  
**Ceiling Void** 20mm above module  
**Weight** 262g

## Finishes

**Finishes** Black | White \*

\* Please enquire as to the availability of non-standard Finishes


## Optical

**System Power** 8.4W  
**Module Output** 665lm\*\*  
**Absolute Output** 569lm\*\*  
**LOR** 86%  
**Glare Cut Off** 44°  
**Glare Comfort Cut Off** 90°

**Colour Temperature** 2700K | 3000K  
**CRI** 92 Typ  
**TM-30** Rf: 90 Rg: 99  
**Beam Angle** 25°  
**Gear Type** Dimmable Options Available  
**Gear Location** Remote

\*\* Photometry shown is correct for 3000K module. Please enquire for 2700K module output.

Product Photometry independently tested in accordance with LM-79

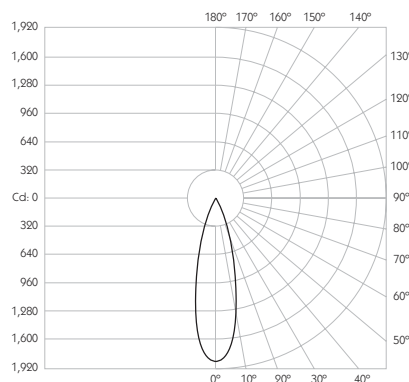

Beam Angle	Beam Diameter (m)	Beam Diameter (ft)	Footcandle (fc)	Lux (lx)
25°	0.44m	1.44ft	1,834 fc	1,834 lx
25°	0.89m	2.88ft	458 fc	458 lx
25°	1.33m	4.37ft	204 fc	204 lx
25°	1.77m	5.81ft	115 fc	115 lx
25°	2.22m	7.26ft	73 fc	73 lx


Luminaire Code	Finish	CCT	CRI	Beam Angle
RCD-632	<b>BK</b> Black <b>WH</b> White	<b>27</b> 2700K <b>30</b> 3000K	<b>92</b> 92 CRI	<b>25</b> 25° Flood
RCD-632			92	25

PRECISION  
LIGHTING


SALES@PRECISIONLIGHTING.CO.UK  
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD  
LONDON SW17 0BA  
t. +44 (0) 20 8947 6616  
f. +44 (0) 20 8286 6626

WIDE FLOOD | FLAT BEZEL | PINHOLE APERTURE

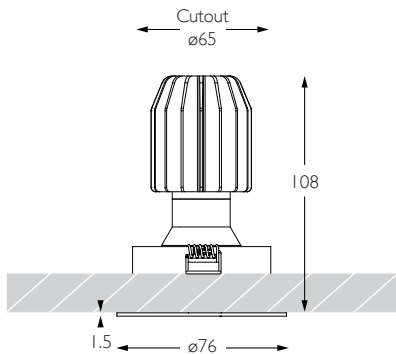


Glare Diagram

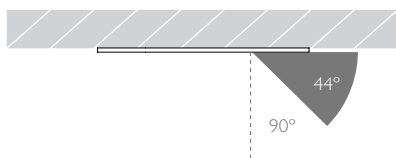

Cut Off: 44°

Glare Comfort Cut Off: 90°

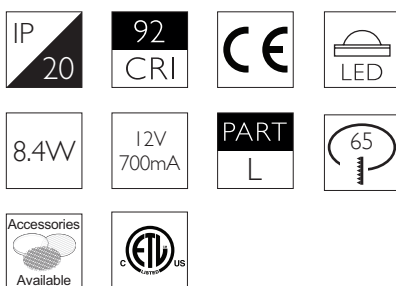

## Technical Description

Minimo 16 Fixed is a recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. Minimo 16 is perfect for use in colour-critical applications with 92CRI delivered from a single source LED module and available in two colour temperatures as standard. Tool-less, site changeable beam angles allow flexibility in varying environments. Machined from aerospace grade 6063-T6 aluminium, Minimo 16 Fixed features a flat, discreet bezel and 33mm pinhole aperture for a minimal and extremely low glare solution. Minimo 16 Fixed delivers a lumen package of 665lm at 8.4W.

## Mechanical

**Category** Interior use only IP20

**Material** Machined Aluminium

**Configuration** Flat | Pinhole Aperture

**Cutout**  $\varnothing$ 65mm

**Ceiling Thickness** 3 - 25mm

**Ceiling Void** 20mm above module

**Weight** 262g

## Finishes

**Finishes** Black | White \*

\* Please enquire as to the availability of non-standard Finishes

## Optical

**System Power** 8.4W

**Module Output** 665lm\*\*

**Absolute Output** 544lm\*\*

**LOR** 82%

**Glare Cut Off** 44°

**Glare Comfort Cut Off** 90°

\*\* Photometry shown is correct for 3000K module. Please enquire for 2700K module output.

**Colour Temperature** 2700K | 3000K

**CRI** 92 Typ



**TM-30** Rf: 90 Rg: 99

**Beam Angle** 45°

**Gear Type** Dimmable Options Available

**Gear Location** Remote

Product Photometry independently tested in accordance with LM-79

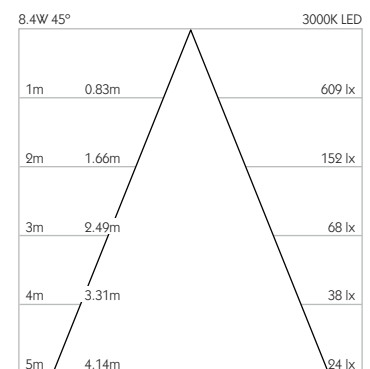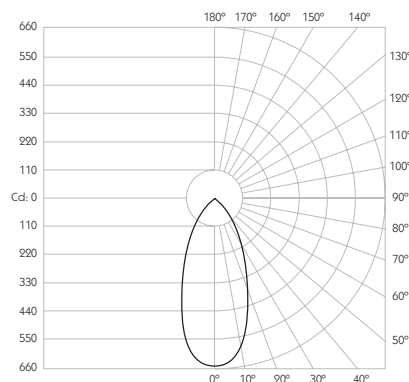

Luminaire Code

RCD-632

Finish

BK  
WH

Black  
White

CCT

27  
30

2700K  
3000K

CRI

92

92 CRI

Beam Angle

45

45° Wide Flood

RCD-632

92

45