



MINIMO 11 | IP54 FIXED

Luminaires
spec sheet RCT-608

ULTRA NARROW SPOT | TRIMLESS | PINHOLE APERTURE

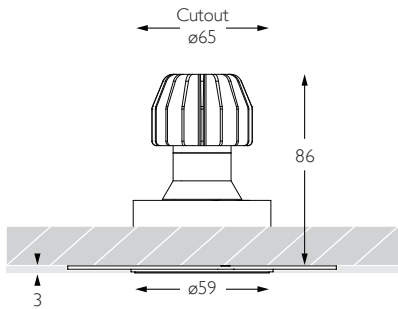


Glare Diagram

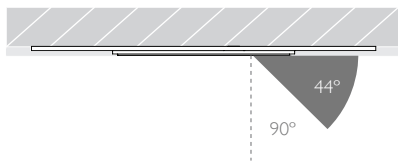

Cut Off: 44°

Glare Comfort Cut Off: 90°

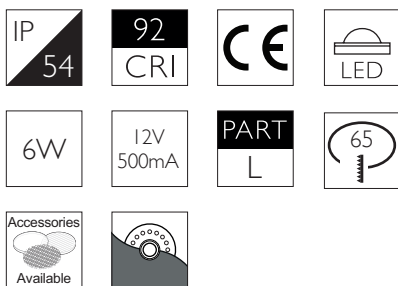

Technical Description

Minimo 11 Fixed is an IP54 recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. Minimo 11 is perfect for use in colour-critical applications with 92CRI delivered from a single source LED module and available in two colour temperatures as standard. Tool-less, site changeable beam angles allow flexibility in varying environments. Machined from 6063-T6 aluminium, Minimo 11 Fixed Trimless features a 33mm pinhole aperture for a minimal and extremely low glare solution. Minimo 11 Fixed delivers a lumen package of 513lm at 6W.

Mechanical

Category Interior use only IP54

Ceiling Thickness 5mm min.

Material Machined Aluminium

Ceiling Void 20mm above module

Configuration Trimless | Pinhole Aperture

Weight 283g

Cutout ø65mm

Finishes

Finishes Black | White *

* Please enquire as to the availability of non-standard finishes

Optical

System Power 6W

Colour Temperature 2700K | 3000K

Module Output 513lm**

CRI 92 Typ

Absolute Output 506lm**

TM-30 Rf: 90 Rg: 99

LOR 99%

Beam Angle 9°

Glare Cut Off 44°


Gear Type Dimmable Options Available

Glare Comfort Cut Off 90°

Gear Location Remote

** Photometry shown is correct for 3000K module. Please enquire for 2700K module output.

Product Photometry independently tested in accordance with LM-79

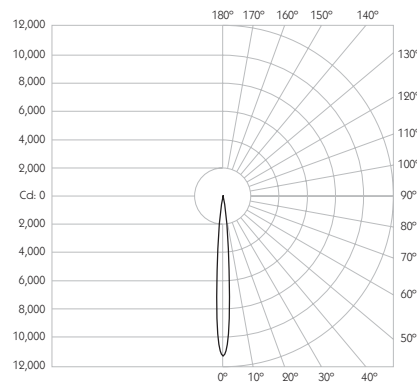

Distance	Beam Diameter	Illuminance (lx)
1m	0.16m	11,214 lx
2m	0.31m	2,804 lx
3m	0.47m	1,246 lx
4m	0.63m	701 lx
5m	0.79m	449 lx

Luminaire Code

RCT-608

Finish

BK

Black

WH

White

CCT

27

2700K

30

3000K

CRI

92

92 CRI

Beam Angle

09

9° Ultra Narrow Beam

RCT-608

92

09

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK


42 RIVERSIDE ROAD
LONDON SW17 0BA

t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626


MINIMO 11 | IP54 FIXED

Luminaires
spec sheet RCT-608

NARROW SPOT | TRIMLESS | PINHOLE APERTURE

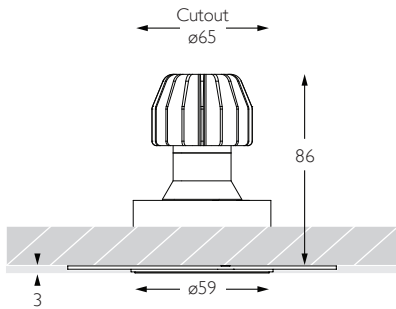


Glare Diagram

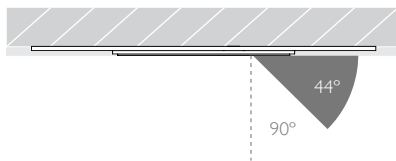

Cut Off: 44°

Glare Comfort Cut Off: 90°

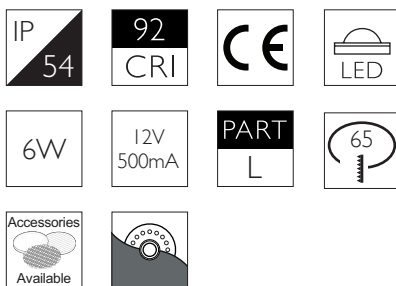

Technical Description

Minimo 11 Fixed is an IP54 recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. Minimo 11 is perfect for use in colour-critical applications with 92CRI delivered from a single source LED module and available in two colour temperatures as standard. Tool-less, site changeable beam angles allow flexibility in varying environments. Machined from 6063-T6 aluminium, Minimo 11 Fixed Trimless features a 33mm pinhole aperture for a minimal and extremely low glare solution. Minimo 11 Fixed delivers a lumen package of 513lm at 6W.

Mechanical

Category Interior use only IP54

Ceiling Thickness 5mm min.

Material Machined Aluminium

Ceiling Void 20mm above module

Configuration Trimless | Pinhole Aperture

Weight 283g

Cutout ø65mm

Finishes

Finishes Black | White *

* Please enquire as to the availability of non-standard finishes

Optical

System Power 6W

Colour Temperature 2700K | 3000K

Module Output 513lm**

CRI 92 Typ

Absolute Output 504lm**

TM-30 Rf: 90 Rg: 99

LOR 98%

Beam Angle 11°

Glare Cut Off 44°


Gear Type Dimmable Options Available

Glare Comfort Cut Off 90°

Gear Location Remote

** Photometry shown is correct for 3000K module. Please enquire for 2700K module output.

Product Photometry independently tested in accordance with LM-79

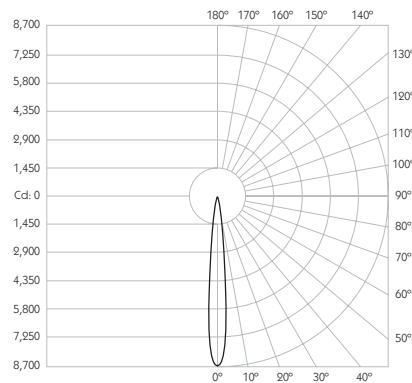

Distance	Beam Diameter	Illuminance (lx)
1m	0.19m	8,614 lx
2m	0.39m	2,154 lx
3m	0.58m	957 lx
4m	0.77m	538 lx
5m	0.96m	345 lx

Luminaire Code

RCT-608

Finish

BK

Black

WH

White

CCT

27

2700K

30

3000K

CRI

92

92 CRI

Beam Angle

11

11° Narrow Beam

RCT-608

92

11

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK


42 RIVERSIDE ROAD
LONDON SW17 0BA

t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626


MINIMO 11 | IP54 FIXED

Luminaires
spec sheet RCT-608

SPOT | TRIMLESS | PINHOLE APERTURE

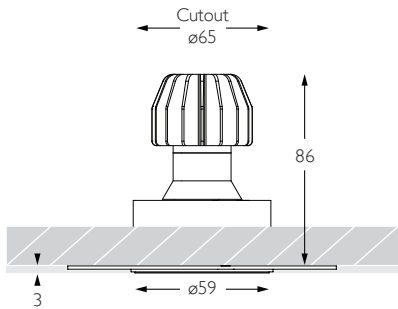


Glare Diagram

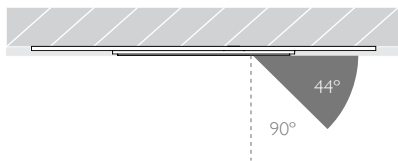

Cut Off: 44°

Glare Comfort Cut Off: 90°

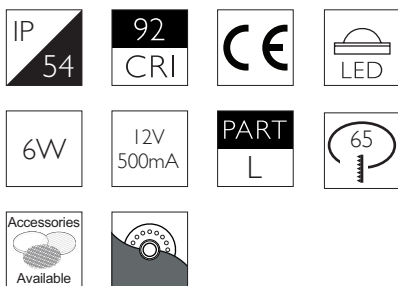

Technical Description

Minimo 11 Fixed is an IP54 recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. Minimo 11 is perfect for use in colour-critical applications with 92CRI delivered from a single source LED module and available in two colour temperatures as standard. Tool-less, site changeable beam angles allow flexibility in varying environments. Machined from 6063-T6 aluminium, Minimo 11 Fixed Trimless features a 33mm pinhole aperture for a minimal and extremely low glare solution. Minimo 11 Fixed delivers a lumen package of 513lm at 6W.

Mechanical

Category Interior use only IP54

Material Machined Aluminium

Configuration Trimless | Pinhole Aperture

Cutout $\varnothing 65\text{mm}$

Ceiling Thickness 5mm min.

Ceiling Void 20mm above module

Weight 283g

Finishes

Finishes Black | White *

* Please enquire as to the availability of non-standard Finishes

Optical

System Power 6W

Module Output 513lm**

Absolute Output 506lm**

LOR 99%

Glare Cut Off 44°

Glare Comfort Cut Off 90°

** Photometry shown is correct for 3000K module. Please enquire for 2700K module output.

Colour Temperature 2700K | 3000K

CRI 92 Typ



TM-30 Rf: 90 Rg: 99

Beam Angle 15°

Gear Type Dimmable Options Available

Gear Location Remote

Product Photometry independently tested in accordance with LM-79

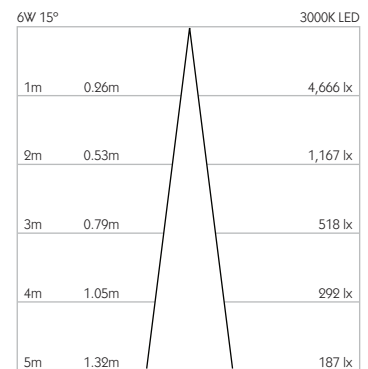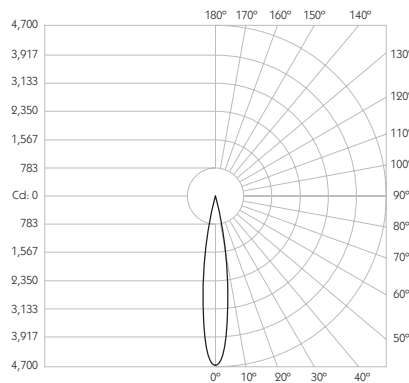

Luminaire Code	Finish	CCT	CRI	Beam Angle
RCT-608	BK Black WH White	27 2700K 30 3000K	92 92 CRI	15 15° Spot

RCT-608	-	-	92	15
---------	---	---	----	----

PRECISION
LIGHTING


SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626


MINIMO 11 | IP54 FIXED

Luminaires
spec sheet RCT-608

FLOOD | TRIMLESS | PINHOLE APERTURE

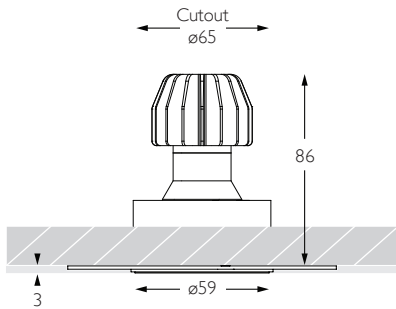


Glare Diagram

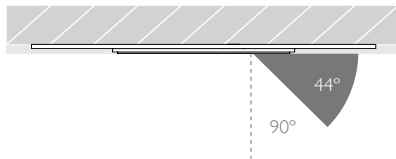

Cut Off: 44°

Glare Comfort Cut Off: 90°

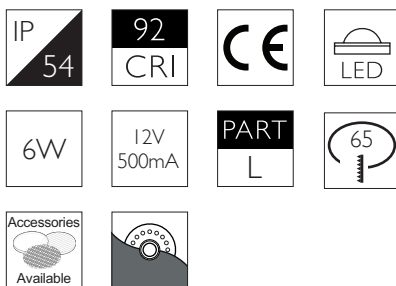

Technical Description

Minimo 11 Fixed is an IP54 recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. Minimo 11 is perfect for use in colour-critical applications with 92CRI delivered from a single source LED module and available in two colour temperatures as standard. Tool-less, site changeable beam angles allow flexibility in varying environments. Machined from 6063-T6 aluminium, Minimo 11 Fixed Trimless features a 33mm pinhole aperture for a minimal and extremely low glare solution. Minimo 11 Fixed delivers a lumen package of 513lm at 6W.

Mechanical

Category Interior use only IP54

Ceiling Thickness 5mm min.

Material Machined Aluminium

Ceiling Void 20mm above module

Configuration Trimless | Pinhole Aperture

Weight 283g

Cutout \varnothing 65mm

Finishes

Finishes Black | White *

* Please enquire as to the availability of non-standard Finishes

Optical

System Power 6W

Colour Temperature 2700K | 3000K

Module Output 513lm**

CRI 92 Typ

Absolute Output 439lm**

TM-30 Rf: 90 Rg: 99

LOR 86%

Beam Angle 25°

Glare Cut Off 44°


Gear Type Dimmable Options Available

Glare Comfort Cut Off 90°

Gear Location Remote

** Photometry shown is correct for 3000K module. Please enquire for 2700K module output.

Product Photometry independently tested in accordance with LM-79

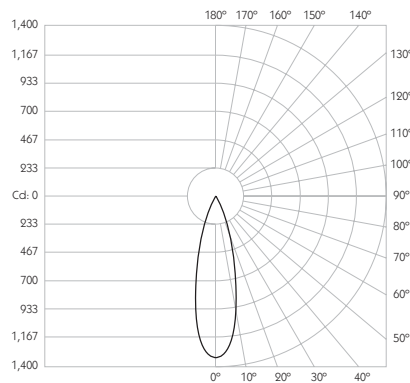

Distance	Beam Diameter	Footcandle (lx)
1m	0.44m	1,416 lx
2m	0.89m	354 lx
3m	1.33m	157 lx
4m	1.77m	89 lx
5m	2.22m	57 lx

Luminaire Code

RCT-608

Finish

BK Black
WH White

CCT

27 2700K
30 3000K

CRI

92 92 CRI

Beam Angle

25 25° Flood

RCT-608

92

25

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK

WWW.PRECISIONLIGHTING.CO.UK


42 RIVERSIDE ROAD
LONDON SW17 0BA

t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626


MINIMO 11 | IP54 FIXED

Luminaires
spec sheet RCT-608

WIDE FLOOD | TRIMLESS | PINHOLE APERTURE

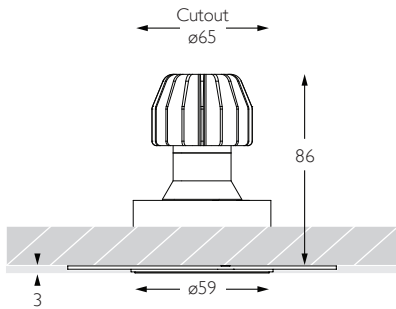


Glare Diagram

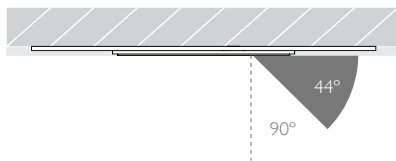

Cut Off: 44°

Glare Comfort Cut Off: 90°

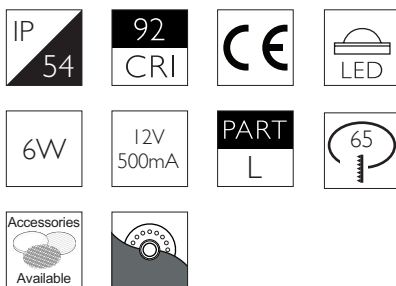

Technical Description

Minimo 11 Fixed is an IP54 recessed LED luminaire providing high performance accent lighting from a compact source with minimal glare. Minimo 11 is perfect for use in colour-critical applications with 92CRI delivered from a single source LED module and available in two colour temperatures as standard. Tool-less, site changeable beam angles allow flexibility in varying environments. Machined from 6063-T6 aluminium, Minimo 11 Fixed Trimless features a 33mm pinhole aperture for a minimal and extremely low glare solution. Minimo 11 Fixed delivers a lumen package of 513lm at 6W.

Mechanical

Category Interior use only IP54

Material Machined Aluminium

Configuration Trimless | Pinhole Aperture

Cutout $\varnothing 65\text{mm}$

Ceiling Thickness 5mm min.

Ceiling Void 20mm above module

Weight 283g

Finishes

Finishes Black | White *

* Please enquire as to the availability of non-standard Finishes

Optical

System Power 6W

Module Output 513lm**

Absolute Output 420lm**

LOR 82%

Glare Cut Off 44°

Glare Comfort Cut Off 90°

** Photometry shown is correct for 3000K module. Please enquire for 2700K module output.

Colour Temperature 2700K | 3000K

CRI 92 Typ



TM-30 Rf: 90 Rg: 99

Beam Angle 45°

Gear Type Dimmable Options Available

Gear Location Remote

Product Photometry independently tested in accordance with LM-79

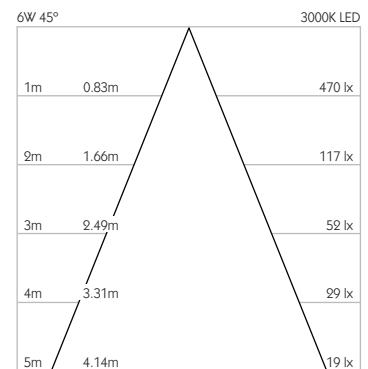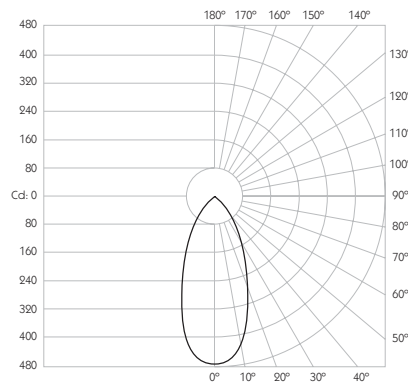

Luminaire Code	Finish	CCT	CRI	Beam Angle
RCT-608	BK Black WH White	27 2700K 30 3000K	92 92 CRI	45 45° Wide Flood
RCT-608	-	-	92	45

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626