

PICO ZOOM SURFACE

Luminaires
spec sheet MPN-706


VARIABLE BEAM



- Category** Interior use only IP20
- Material** Machined Aluminium
- Finish** Brushed Aluminium | Black | White | Custom
- System** Integral Monopoint
- Lockable** Pan & Tilt
- System Power** 1.6W
- Module Output** 140lm
- Absolute Output** 130lm
- LOR** 93%
- Colour Temperature** 3000K | 2700K | *
- CRI** Ra: 95 **TM-30** Rf: 93 Rg: 99
- Optics** 12° to 30°
- Gear Type** Dimmable options available
- Weight** 62g




* Please enquire as to the availability of non-standard Colour Temperatures.

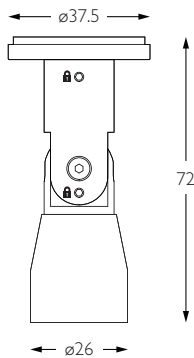


Pico Zoom Surface is a discreet 95CRI LED spotlight, based on the minimal aesthetic of the Pico 1 Surface, but with the additional benefit of tool-less variable beam technology. The spotlight comes as standard in white, black and brushed aluminium finishes, and has a tool-less beam adjustment mechanism. Movement is aided with a low friction bearing rotation and constant torque tilt mechanism, lockable in both pan and tilt. Pico Zoom Surface is machined from aerospace grade 6063-T6 aluminium, delivering a lumen package of 140lm at 1.6W.

Product Photometry independently tested in accordance with LM-79

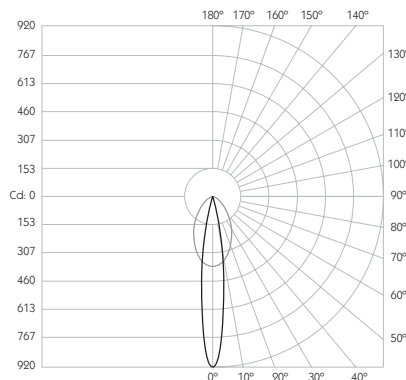

Distance	Beam Diameter	Beam Area	Footcandle (lx)	Footcandle (lx)
1m	0.54m x 0.21m		911 lx	335 lx
2m	1.07m x 0.42m		228 lx	84 lx
3m	1.61m x 0.63m		101 lx	37 lx
4m	2.14m x 0.84m		57 lx	21 lx
5m	2.68m x 1.05m		36 lx	13 lx



Fixed Mounting Plate



MPN-706-AL-XX9512

MPN-706-BK-XX9512

MPN-706-WH-XX9512

For 3000K Substitute XX with 30 | For 2700K Substitute XX with 27

PRECISION
LIGHTING

SALES@PRECISIONLIGHTING.CO.UK
WWW.PRECISIONLIGHTING.CO.UK

42 RIVERSIDE ROAD
LONDON SW17 0BA
t. +44 (0) 20 8947 6616
f. +44 (0) 20 8286 6626