



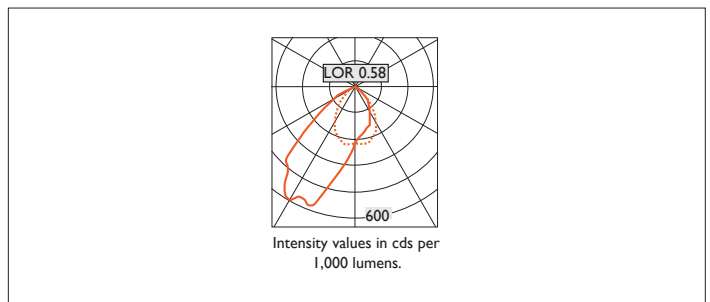

VP X143 LENS WALLWASHER

VP X143 LENS WALLWASHER Round recessed wallwasher with white ceiling trim and low glare, deep cone, diffused spectro silver reflector and lens optic.
Overall diameter 143mm, cut out 131mm diameter. Xicato LED.

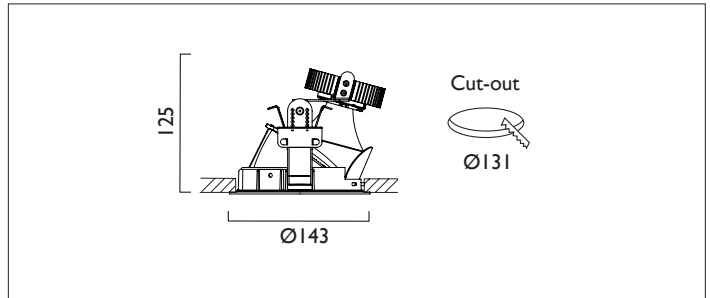

| | |
|----------------|-------------------------------|
| Product Number | C3308/*Engine |
| Lamp Type | Xicato LED, Up to 2000 lumens |
| Construction | Aluminium / Steel |
| Ceiling Trim | White RAL 9010 |
| IP | IP20 |
| Control | Driver |

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

*Light Engine Specification


Xicato XTM 50,000 hours >Ra80

| | | | | |
|-----|---------|-------|----------|-------|
| 11A | 1105 lm | 7.2W | 153 lm/w | 350mA |
| 14A | 1490 lm | 10.6W | 141 lm/w | 500mA |
| 20A | 2000 lm | 15.2W | 131 lm/w | 700mA |

| | | |
|-------|---|--|
| 2700K | 2 | 0 No Emergency E Maintained Emergency |
| 3000K | 3 | |
| 3500K | 4 | |
| 4000K | 5 | |
| | | 0 Fixed Output |
| | | 1 1-10V |
| | | 3 DSI |
| | | 5 DALI |
| | | 7 Lead / Trailing |
| | | 9 Addressable |


EN 60598-1
WEE/AE0290TY





VP X143 LENS IP44 WALLWASHER

VP X143 LENS WALLWASHER Round recessed wallwasher with white ceiling trim and low glare, deep cone, diffused spectro silver reflector and lens optic.
Overall diameter 143mm, cut out 131mm diameter. Xicato LED.

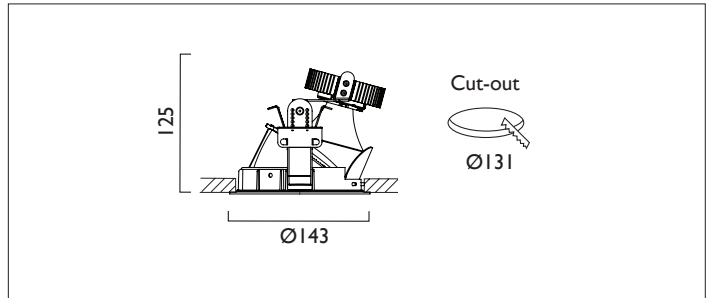

| | |
|----------------|-------------------------------|
| Product Number | C3408/*Engine |
| Lamp Type | Xicato LED, Up to 2000 lumens |
| Construction | Aluminium / Steel |
| Ceiling Trim | White RAL 9010 |
| IP | IP44 |
| Control | Driver |

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

*Light Engine Specification

Xicato XTM 50,000 hours >Ra80


| | | | | | |
|-----|-----|---------|-------|----------|-------|
| 11A | --- | 1105 lm | 7.2W | 153 lm/w | 350mA |
| 14A | --- | 1490 lm | 10.6W | 141 lm/w | 500mA |
| 20A | --- | 2000 lm | 15.2W | 131 lm/w | 700mA |

| | | |
|-------|---|--|
| 2700K | 2 | <ul style="list-style-type: none"> 0 No Emergency E Maintained Emergency |
| 3000K | 3 | |
| 3500K | 4 | |
| 4000K | 5 | |

| | |
|---|-----------------|
| 0 | Fixed Output |
| 1 | 1-10V |
| 3 | DSI |
| 5 | DALI |
| 7 | Lead / Trailing |
| 9 | Addressable |



EN 60598-1
WEE/AE0290TY





VP X143 LENS WALLWASHER

VP X143 LENS WALLWASHER Round recessed wallwasher with white ceiling trim and low glare, deep cone, diffused spectro silver reflector and lens optic.
Overall diameter 143mm, cut out 131mm diameter. Xicato LED.

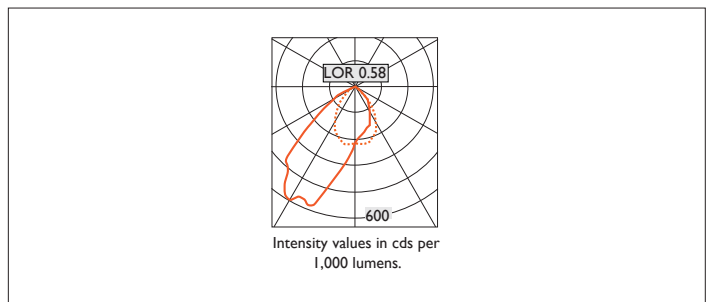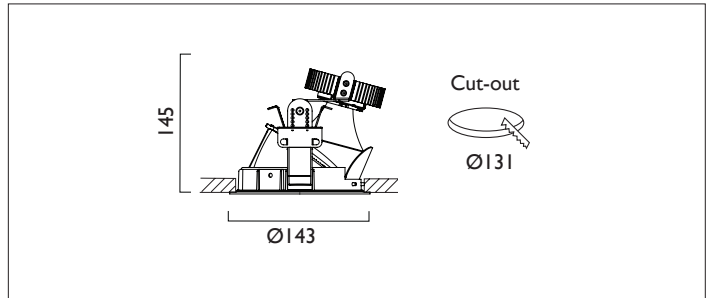

| | |
|----------------|-------------------------------|
| Product Number | F5008/*Engine |
| Lamp Type | Xicato LED, Up to 3000 lumens |
| Construction | Aluminium / Steel |
| Ceiling Trim | White RAL 9010 |
| IP | IP20 |
| Control | Driver |


Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

*Light Engine Specification
Xicato XTM 50,000 hours >Ra80

| | | | | | |
|-------|-----|---------|----------------------|----------|--------|
| | 30A | 3000 lm | 25.7W | 117 lm/w | 1050mA |
| 2700K | 2 | | | | |
| 3000K | 3 | | | | |
| 3500K | 4 | | | | |
| 4000K | 5 | | | | |
| | | 0 | No Emergency | | |
| | | E | Maintained Emergency | | |
| | | 0 | Fixed Output | | |
| | | 1 | 1-10V | | |
| | | 3 | DSI | | |
| | | 5 | DALI | | |
| | | 7 | Lead / Trailing | | |
| | | 9 | Addressable | | |


EN 60598-1
WEE/AE0290TY





VP X143 LENS IP44 WALLWASHER

VP X143 LENS WALLWASHER Round recessed wallwasher with white ceiling trim and low glare, deep cone, diffused spectro silver reflector and lens optic.
Overall diameter 143mm, cut out 131mm diameter. Xicato LED.

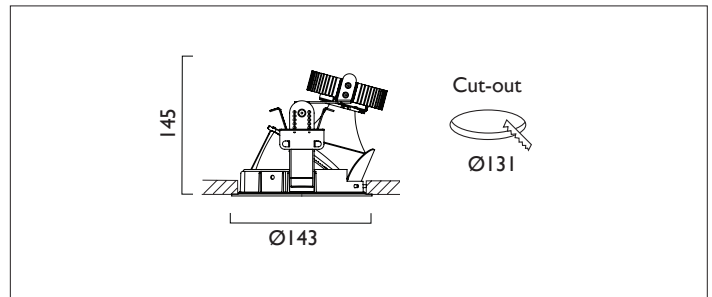

| | |
|----------------|-------------------------------|
| Product Number | F5108/*Engine |
| Lamp Type | Xicato LED, Up to 3000 lumens |
| Construction | Aluminium / Steel |
| Ceiling Trim | White RAL 9010 |
| IP | IP44 |
| Control | Driver |

Please Note: For lumen output/power, colour temperature and protocols and appropriate Light Engine should also be specified.

*Light Engine Specification
Xicato XTM 50,000 hours >Ra80

| | | | | |
|-------|---------|--|--|--------|
| 30A | 3000 lm | 25.7W | 117 lm/w | 1050mA |
| 2700K | 2 | <ul style="list-style-type: none"> 0 No Emergency E Maintained Emergency | <ul style="list-style-type: none"> 0 Fixed Output 1 1-10V 3 DSI 5 DALI 7 Lead / Trailing 9 Addressable | |
| 3000K | 3 | | | |
| 3500K | 4 | | | |
| 4000K | 5 | | | |

