


ULTRA NARROW SPOT GLARE GUARD



Technical Description

Evo T11 is a single source side-mount LED spotlight that comes as standard in white, black and brushed aluminium finishes. It has five site changeable optics for flexible distribution. The ultra narrow spot beam in our 4.9W 405lm module has a peak intensity of 9532cd. The Evo T has a 360 degree bearing aided rotation and 180 degree constant torque tilt mechanism, both lockable. The Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive.

Mechanical

Category Interior use only IP20

Material Machined Aluminium

Lockable Pan & Tilt

Accessories Snoots | Louvres | Lenses

Systems Eutrac | Monopoint | LV tracks

Weight 173g

Finishes

Finishes Brushed Aluminium | Black | White | Custom*

* Please enquire as to the availability of non-standard Finishes

Optical & Electrical

System Power 4.9W

Module Output 405lm*

Absolute Output 397lm

Gear Type Dimmable available

Colour Temperature 3000K*




CRI 92 TYP

TM-30 RF: 90 RG: 99

Beam Angle 09°

Drivers

| Driver/PSU Code | QTY Lights | Input |
|------------------|------------|----------|
| 1-10V Dimming | | |
| PSCV-20-24-A-TC | 1 | 230V |
| PSCV-15-24-A-TC | 1 | 110/127V |
| PSCV-120-24-A-OS | 1 to 15 | 230V |
| DALI Dimming | | |
| PSCV-16-24-D-TC | 1 | 230V |
| PSCV-15-24-D-TC | 1 | 110/127V |
| PSCV-100-24-D-EL | 1 to 15 | 120/230V |

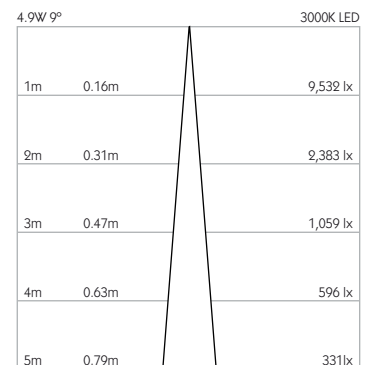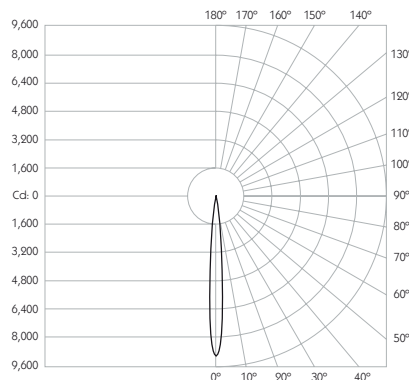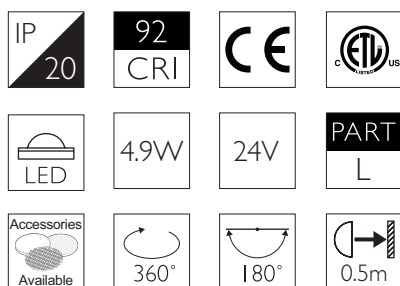

| Finish | Cable | Basis Track | Retrac | Eutrac | Trimless | Flat | Node | Surface |
|--------|-------|-------------------|-------------------|---------------------|--------------------|--------------------|--------------------|--------------------|
| AL | | BT-1021-AL-XX9209 | RT-1021-AL-XX9209 | EUT3-1021-AL-XX9209 | MPS-1021-AL-XX9209 | MPX-1021-AL-XX9209 | MPY-1021-AL-XX9209 | MPZ-1021-AL-XX9209 |
| WH | | | RT-1021-WH-XX9209 | EUT3-1021-WH-XX9209 | MPS-1021-WH-XX9209 | MPX-1021-WH-XX9209 | MPY-1021-WH-XX9209 | MPZ-1021-WH-XX9209 |
| BK | | | RT-1021-BK-XX9209 | EUT3-1021-BK-XX9209 | MPS-1021-BK-XX9209 | MPX-1021-BK-XX9209 | MPY-1021-BK-XX9209 | MPZ-1021-BK-XX9209 |
| RB * | | | | | | | | |


For 3000K Substitute XX with 30

For 2700K Substitute XX with 27

*All Brass and Bronze finishes are made to order and subject to MOQ

Product photometry tested in accordance with LM-79 at 3000K, please enquire for 2700K data

NARROW SPOT GLARE GUARD



Technical Description

Evo T11 is a single source side-mount LED spotlight that comes as standard in white, black and brushed aluminium finishes. It has five site changeable optics for flexible distribution. The narrow spot beam in our 4.9W 405lm module has a peak intensity of 7392cd. The Evo has a 360 degree bearing aided rotation and 180 degree constant torque tilt mechanism, both lockable. The Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive.

Mechanical

Category Interior use only IP20

Material Machined Aluminium

Lockable Pan & Tilt

Accessories Snoots | Louvres | Lenses

Systems Eutrac | Monopoint | LV tracks

Weight 173g

Finishes

Finishes Brushed Aluminium | Black | White | Custom*

* Please enquire as to the availability of non-standard Finishes

Optical & Electrical

System Power 4.9W

Module Output 405lm*

Absolute Output 396lm

Gear Type Dimmable available

Colour Temperature 3000K*




CRI 92 TYP

TM-30 RF: 90 RG: 99

Beam Angle 11°

Drivers

| Driver/PSU Code | QTY Lights | Input |
|------------------|------------|----------|
| 1-10V Dimming | | |
| PSCV-20-24-A-TC | 1 | 230V |
| PSCV-15-24-A-TC | 1 | 110/127V |
| PSCV-120-24-A-OS | 1 to 15 | 230V |
| DALI Dimming | | |
| PSCV-16-24-D-TC | 1 | 230V |
| PSCV-15-24-D-TC | 1 | 110/127V |
| PSCV-100-24-D-EL | 1 to 15 | 120/230V |

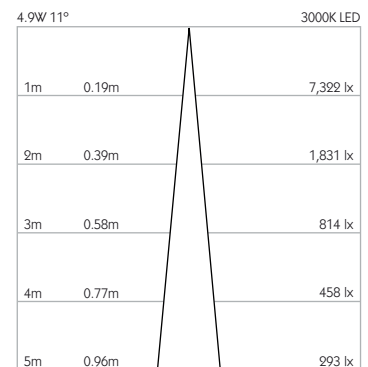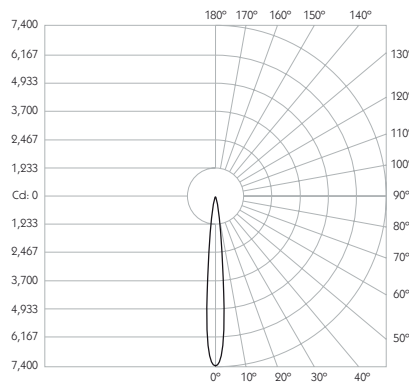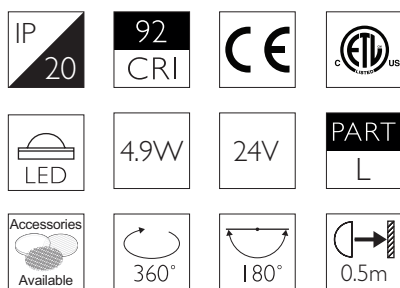

| Finish | Cable | Basis Track | Retrac | Eutrac | Trimless | Flat | Node | Surface |
|--------|-------|-------------------|-------------------|---------------------|--------------------|--------------------|--------------------|--------------------|
| AL | | BT-1021-AL-XX9211 | RT-1021-AL-XX9211 | EUT3-1021-AL-XX9211 | MPS-1021-AL-XX9211 | MPX-1021-AL-XX9211 | MPY-1021-AL-XX9211 | MPZ-1021-AL-XX9211 |
| WH | | | RT-1021-WH-XX9211 | EUT3-1021-WH-XX9211 | MPS-1021-WH-XX9211 | MPX-1021-WH-XX9211 | MPY-1021-WH-XX9211 | MPZ-1021-WH-XX9211 |
| BK | | | RT-1021-BK-XX9211 | EUT3-1021-BK-XX9211 | MPS-1021-BK-XX9211 | MPX-1021-BK-XX9211 | MPY-1021-BK-XX9211 | MPZ-1021-BK-XX9211 |
| RB * | | | | | | | | |


For 3000K Substitute XX with 30

For 2700K Substitute XX with 27

*All Brass and Bronze finishes are made to order and subject to MOQ

Product photometry tested in accordance with LM-79 at 3000K, please enquire for 2700K data

MEDIUM GLARE GUARD



Technical Description

Evo T11 is a single source side-mount LED spotlight that comes as standard in white, black and brushed aluminium finishes. It has five site changeable optics for flexible distribution. The medium beam in our 4.9W 405lm module has a peak intensity of 3966cd. The Evo has a 360 degree bearing aided rotation and 180 degree constant torque tilt mechanism, both lockable. The Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive.

Mechanical

Category Interior use only IP20

Material Machined Aluminium

Lockable Pan & Tilt

Accessories Snoots | Louvres | Lenses

Systems Eutrac | Monopoint | LV tracks

Weight 173g

Finishes

Finishes Brushed Aluminium | Black | White | Custom*

* Please enquire as to the availability of non-standard Finishes

Optical & Electrical

System Power 4.9W

Module Output 405lm*

Absolute Output 397lm

Gear Type Dimmable available

Colour Temperature 3000K*




CRI 92 TYP

TM-30 RF: 90 RG: 99

Beam Angle 15°

Drivers

| Driver/PSU Code | QTY Lights | Input |
|------------------|------------|----------|
| 1-10V Dimming | | |
| PSCV-20-24-A-TC | 1 | 230V |
| PSCV-15-24-A-TC | 1 | 110/127V |
| PSCV-120-24-A-OS | 1 to 15 | 230V |
| DALI Dimming | | |
| PSCV-16-24-D-TC | 1 | 230V |
| PSCV-15-24-D-TC | 1 | 110/127V |
| PSCV-100-24-D-EL | 1 to 15 | 120/230V |

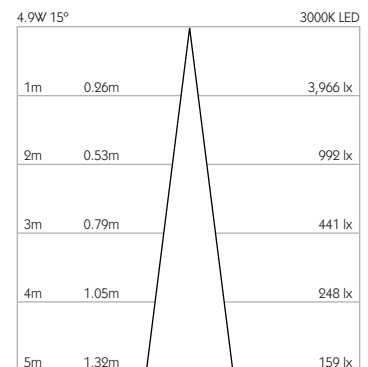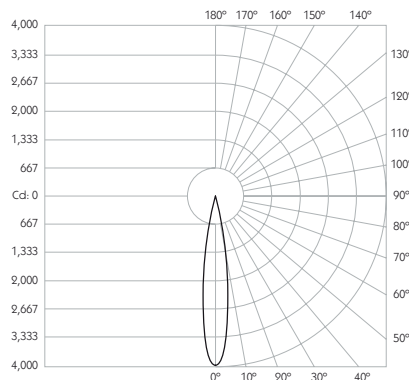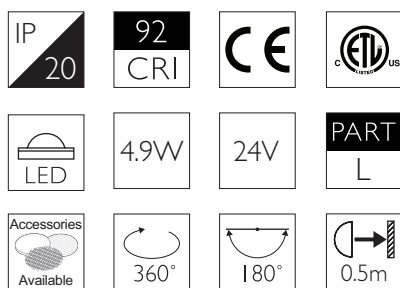

| Finish | Cable | Basis Track | Retrac | Eutrac | Trimless | Flat | Node | Surface |
|--------|-------|-------------------|-------------------|---------------------|--------------------|--------------------|--------------------|--------------------|
| AL | | BT-1021-AL-XX9215 | RT-1021-AL-XX9215 | EUT3-1021-AL-XX9215 | MPS-1021-AL-XX9215 | MPX-1021-AL-XX9215 | MPY-1021-AL-XX9215 | MPZ-1021-AL-XX9215 |
| WH | | | RT-1021-WH-XX9215 | EUT3-1021-WH-XX9215 | MPS-1021-WH-XX9215 | MPX-1021-WH-XX9215 | MPY-1021-WH-XX9215 | MPZ-1021-WH-XX9215 |
| BK | | | RT-1021-BK-XX9215 | EUT3-1021-BK-XX9215 | MPS-1021-BK-XX9215 | MPX-1021-BK-XX9215 | MPY-1021-BK-XX9215 | MPZ-1021-BK-XX9215 |
| RB * | | | | | | | | |


For 3000K Substitute XX with 30

For 2700K Substitute XX with 27

*All Brass and Bronze finishes are made to order and subject to MOQ

Product photometry tested in accordance with LM-79 at 3000K, please enquire for 2700K data

FLOOD GLARE GUARD



Technical Description

Evo T11 is a single source side-mount LED spotlight that comes as standard in white, black and brushed aluminium finishes. It has five site changeable optics for flexible distribution. The flood beam in our 4.9W 405lm module has a peak intensity of 1203cd. The Evo has a 360 degree bearing aided rotation and 180 degree constant torque tilt mechanism, both lockable. The Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive.

Mechanical

Category Interior use only IP20

Material Machined Aluminium

Lockable Pan & Tilt

Accessories Snoots | Louvres | Lenses

Systems Eutrac | Monopoint | LV tracks

Weight 173g

Finishes

Finishes Brushed Aluminium | Black | White | Custom*

* Please enquire as to the availability of non-standard finishes

Optical & Electrical

System Power 4.9W

Module Output 405lm*

Absolute Output 345lm

Gear Type Dimmable available

Colour Temperature 3000K*




CRI 92 TYP

TM-30 RF: 90 RG: 99

Beam Angle 25°

Drivers

| Driver/PSU Code | QTY Lights | Input |
|------------------|------------|----------|
| 1-10V Dimming | | |
| PSCV-20-24-A-TC | 1 | 230V |
| PSCV-15-24-A-TC | 1 | 110/127V |
| PSCV-120-24-A-OS | 1 to 15 | 230V |
| DALI Dimming | | |
| PSCV-16-24-D-TC | 1 | 230V |
| PSCV-15-24-D-TC | 1 | 110/127V |
| PSCV-100-24-D-EL | 1 to 15 | 120/230V |

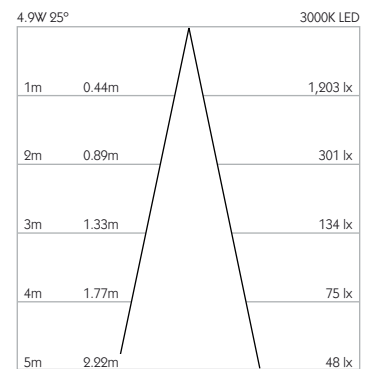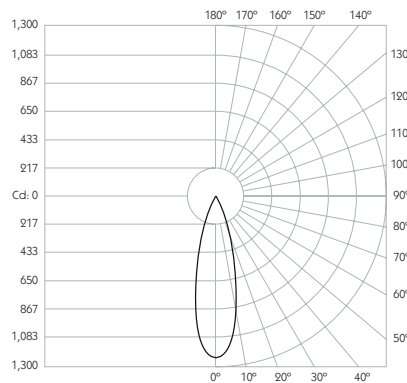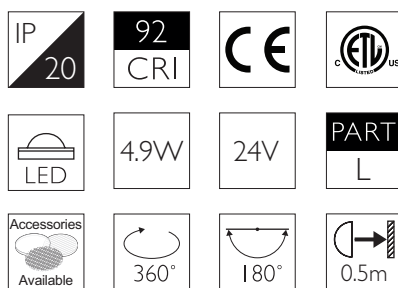

| Finish | Cable | Basis Track | Retrac | Eutrac | Trimless | Flat | Node | Surface |
|--------|-------|-------------------|-------------------|---------------------|--------------------|--------------------|--------------------|--------------------|
| AL | | BT-1021-AL-XX9225 | RT-1021-AL-XX9225 | EUT3-1021-AL-XX9225 | MPS-1021-AL-XX9225 | MPX-1021-AL-XX9225 | MPY-1021-AL-XX9225 | MPZ-1021-AL-XX9225 |
| WH | | | RT-1021-WH-XX9225 | EUT3-1021-WH-XX9225 | MPS-1021-WH-XX9225 | MPX-1021-WH-XX9225 | MPY-1021-WH-XX9225 | MPZ-1021-WH-XX9225 |
| BK | | | RT-1021-BK-XX9225 | EUT3-1021-BK-XX9225 | MPS-1021-BK-XX9225 | MPX-1021-BK-XX9225 | MPY-1021-BK-XX9225 | MPZ-1021-BK-XX9225 |
| RB | * | | | | | | | |


For 3000K Substitute XX with 30

For 2700K Substitute XX with 27

*All Brass and Bronze finishes are made to order and subject to MOQ

Product photometry tested in accordance with LM-79 at 3000K, please enquire for 2700K data

WIDE FLOOD GLARE GUARD



Technical Description

Evo T11 is a single source side-mount LED spotlight that comes as standard in white, black and brushed aluminium finishes. It has five site changeable optics for flexible distribution. The wide flood beam in our 4.9W 405lm module has a peak intensity of 348cd. The Evo has a 360 degree bearing aided rotation and 180 degree constant torque tilt mechanism, both lockable. The Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive.

Mechanical

Category Interior use only IP20

Material Machined Aluminium

Lockable Pan & Tilt

Accessories Snoots | Louvres | Lenses

Systems Eutrac | Monopoint | LV tracks

Weight 173g

Finishes

Finishes Brushed Aluminium | Black | White | Custom*

* Please enquire as to the availability of non-standard finishes

Optical & Electrical

System Power 4.9W

Module Output 405lm*

Absolute Output 330lm

Gear Type Dimmable available

Colour Temperature 3000K*




CRI 92 TYP

TM-30 RF: 90 RG: 99

Beam Angle 45°

Drivers

| Driver/PSU Code | QTY Lights | Input |
|------------------|------------|----------|
| 1-10V Dimming | | |
| PSCV-20-24-A-TC | 1 | 230V |
| PSCV-15-24-A-TC | 1 | 110/127V |
| PSCV-120-24-A-OS | 1 to 15 | 230V |
| DALI Dimming | | |
| PSCV-16-24-D-TC | 1 | 230V |
| PSCV-15-24-D-TC | 1 | 110/127V |
| PSCV-100-24-D-EL | 1 to 15 | 120/230V |

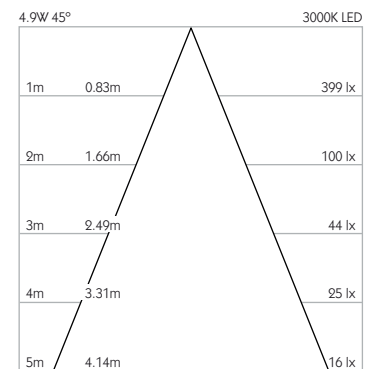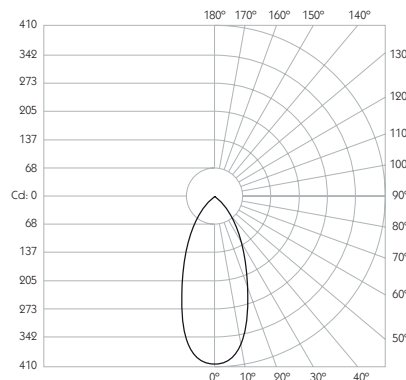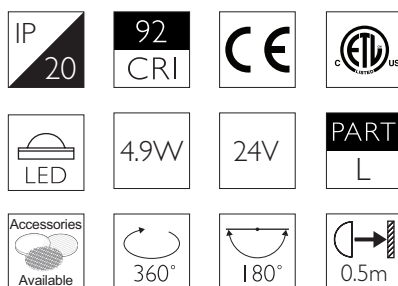

| Finish | Cable | Basis Track | Retrac | Eutrac | Trimless | Flat | Node | Surface |
|--------|-------|-------------------|-------------------|---------------------|--------------------|--------------------|--------------------|--------------------|
| AL | | BT-1021-AL-XX9245 | RT-1021-AL-XX9245 | EUT3-1021-AL-XX9245 | MPS-1021-AL-XX9245 | MPX-1021-AL-XX9245 | MPY-1021-AL-XX9245 | MPZ-1021-AL-XX9245 |
| WH | | | RT-1021-WH-XX9245 | EUT3-1021-WH-XX9245 | MPS-1021-WH-XX9245 | MPX-1021-WH-XX9245 | MPY-1021-WH-XX9245 | MPZ-1021-WH-XX9245 |
| BK | | | RT-1021-BK-XX9245 | EUT3-1021-BK-XX9245 | MPS-1021-BK-XX9245 | MPX-1021-BK-XX9245 | MPY-1021-BK-XX9245 | MPZ-1021-BK-XX9245 |
| RB * | | | | | | | | |

For 3000K Substitute XX with 30

For 2700K Substitute XX with 27

*All Brass and Bronze finishes are made to order and subject to MOQ

Product photometry tested in accordance with LM-79 at 3000K, please enquire for 2700K data