

End cap free linear luminaire with optics for pitch perfect wall grazing

LIGHT OUTPUT


CCT/LED Colour (K)	2700
CRI	80
Luminaire Lumens	117
Optical Data/Beam Angle (°)	45x20
LED Binning	Cree Z Bin

ELECTRICAL

Watts per meter (W/m)	15
Input Voltage	24 VDC (23V min, 25V max)
Connection Type	JST JWPF IP67
Maximum Chain Length (mm)	4800
Approx. Power Consumption (W)	2
Dimmable	Yes
Max Luminaire Length (mm)	1005

PHYSICAL & ENVIRONMENTAL

Finish	Silver Anodised Housing
Length (mm)	130
Ambient Storage Temperature (°C)	-30 to +85
Ambient Operating Temperature (°C)	-10 to +50
IP Rating	IP67
IK Rating	N/A
LED Pitch (mm)	20.8
Cable Exit/Entry	Side Exit
Weight (g)	N/A

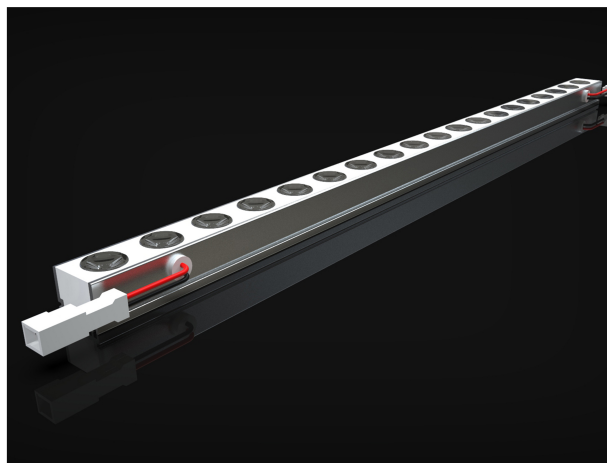


SPECIFICATION TEXT

This LED lighting system provides end to end illumination without end caps. Our unique resin technology allows fixtures to be connected in daisy chain providing continuous lit grazing whilst maintaining optical pitch. This unique profile connects using side exit cable management. 19 x 16mm / 0.74" x 0.629" cross-section.

PRODUCT FEATURES

- End to end connections
- Smooth optically lit surfaces
- Mini linear profile
- IP67 rated for outdoor use
- Fixing clips and louvre options
- Dimmable via remote LED driver

DIMENSIONS

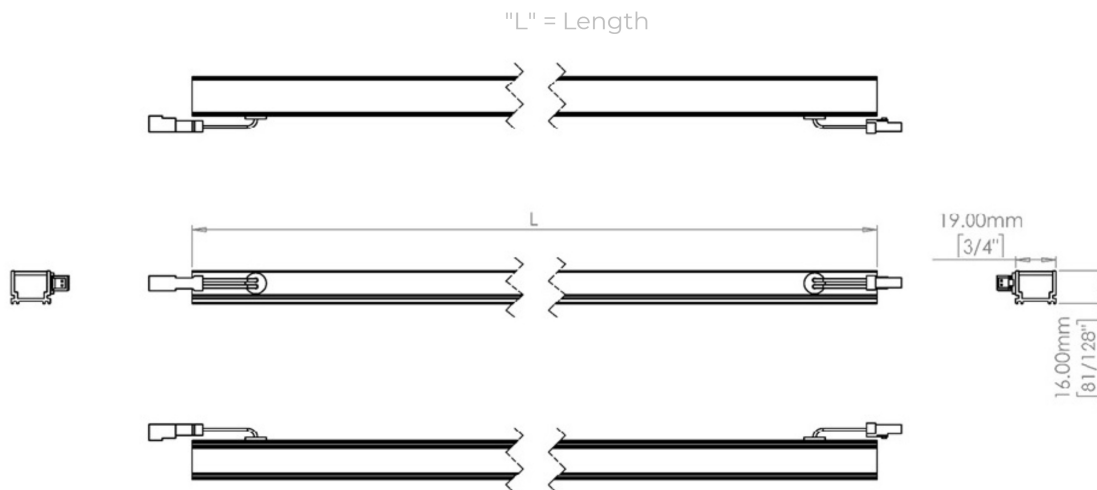

PART NUMBER: VEX-LUMAERA-19-TIR - 2700K - 130 - 15W - IP67 - 45x20

Provided data are typical values. Due to tolerances of the production process, figures for light output, electrical data etc can vary up to 10%. The Tc-point must be measured in thermal equilibrium in accordance with IEC EN 60598-1.