



GENERAL SPECIFICATION

QuickShip Program: Please review our [QuickShip Terms & Conditions](#)

Body and trim: Steel and aluminum.

Finish: White powder coated.

Suspension: Steel cables, vertical mount only. For Direct/Indirect a minimum mounting height of 305mm/12" is required.

Power cable: Silver braided.

Diffusers: Opal polycarbonate direct/Clear polycarbonate indirect, supplied in sections.

Drivers: Integral, HPF electronic drivers for 120-277V.

Mechanical: Luminaires mount directly over J box (by others).


L70 @25deg C (77deg F): > 50,000 hrs.

Delivered Lumens: Delivered lumens & LPW based on 4000K (min 80 CRI).

Approvals: Damp Location (Indoor use only).




Suspended Direct




Suspended Direct/Indirect




QuickShip




AAB1




AAB2




AAB3




AAB4




AAB5



AAB6



AAB7



AAB8

HOW TO ORDER

A SPECIFY LUMINAIRE

Code:	Diameter (A):	Light Direction:	Wattage:	Delivered lms:	LPW:	Height (B):	Suspension Points:	Weight:
AAB1	610mm/24"	Direct	65W	6461	100	152mm/6"	3	8kg/18lbs
AAB2	914mm/36"	Direct	101W	10098	100	152mm/6"	3	12kg/26lbs
AAB3	1219mm/48"	Direct	138W	13529	99	177mm/17"	3	15kg/35lbs
AAB4	1524mm/60"	Direct	180W	17785	99	330mm/13"	3	19kg/42lbs
AAB5	610mm/24"	Direct/Indirect	87W	9127	106	152mm/6"	3	8kg/18lbs
AAB6	914mm/36"	Direct/Indirect	144W	15474	107	152mm/6"	3	12kg/26lbs
AAB7	1219mm/48"	Direct/Indirect	180W	18913	105	177mm/17"	3	15kg/35lbs
AAB8	1524mm/60"	Direct/Indirect	252W	26986	107	330mm/13"	3	19kg/42lbs

B SPECIFY CCT (DIRECT)

J2	3000K (min 80 CRI)
J3	3500K (min 80 CRI)
J4	4000K (min 80 CRI)

C SPECIFY CCT (INDIRECT)

K0	Indirect CCT not required
K2	3000K (min 80 CRI)
K3	3500K (min 80 CRI)
K4	4000K (min 80 CRI)

D SPECIFY DIMMING

D1	0-10V Dimming (1.0%)
D2	0-10V Dimming (0.1%)

E SPECIFY SUSPENSION

P3	Vertical
----	----------

F SPECIFY FINISH

F1	White
----	-------

G SPECIFY LUMEN OUTPUT


L0	100% of standard output
L1	Lumen & wattage reduction to approximately 75% of standard output
L2	Lumen & wattage reduction to approximately 50% of standard output

EXAMPLE CODE

AAB1/J3/K0/D2/P3/F1/L0

DIMENSIONAL DIAGRAMS

VERTICAL - INTEGRAL DRIVER

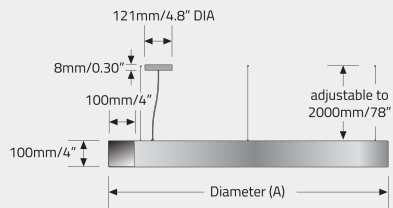

APPROVALS

