


GENERAL SPECIFICATION

- Housing:** Die-cast and extruded aluminium.
- External Screws:** Stainless steel.
- Lens:** Clear polycarbonate.
- Gaskets:** One piece silicone.
- Finish:** Silver powder coated RAL9006 or black powder coated.
- Drivers:** HPF, electronic for 120-277V (EU-240V).
- Cable entry:** M20 cable gland.
- Mounting:** Anchorage rods required for concrete.
- Delivered Lumens:** Delivered lumens & LPW based on 3000K (min 80 CRI).


MOUNTING & OPTICS




Ext-Bollards



830 7501



830 7511



830 7515

HOW TO ORDER

A LUMINAIRE

Code:	Power (LED):	Delivered lms:	Type:
830 7501	14W	933	A
830 7511	14W	933	B
830 7515	14W	933	C

B SPECIFY CCT

30	3000K (min 80 CRI)
40	4000K (min 80 CRI)

C SPECIFY FINISH

BL	Black
GR	Light Gray RAL 9006

D SPECIFY ANCHORAGE BASE

8307599/BL	Anchorage base for poured concrete (Type A & B)
8307599/GR	Anchorage base for poured concrete (Type A & B)
8307580/BL	Anchorage base for poured concrete (Type C)
8307580/GR	Anchorage base for poured concrete (Type C)

E SPECIFY LIGHT SHIELDS

8307590/BL	Lighting Shields (qty 2)
8307590/GR	Lighting Shields (qty 2)



F SPECIFY DIMMING

DB	Dimming (0-10V, 10%)
----	----------------------

EXAMPLE CODE

8307501/30/BL

DIMENSIONAL DIAGRAMS

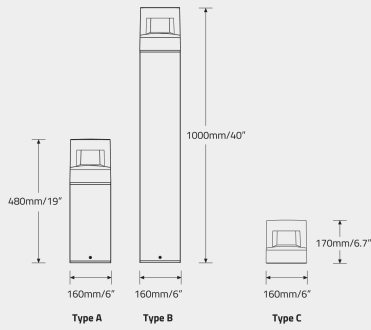

APPROVALS

