


FLEXI GRAZER - 4000K

SPECIFICATION SHEET

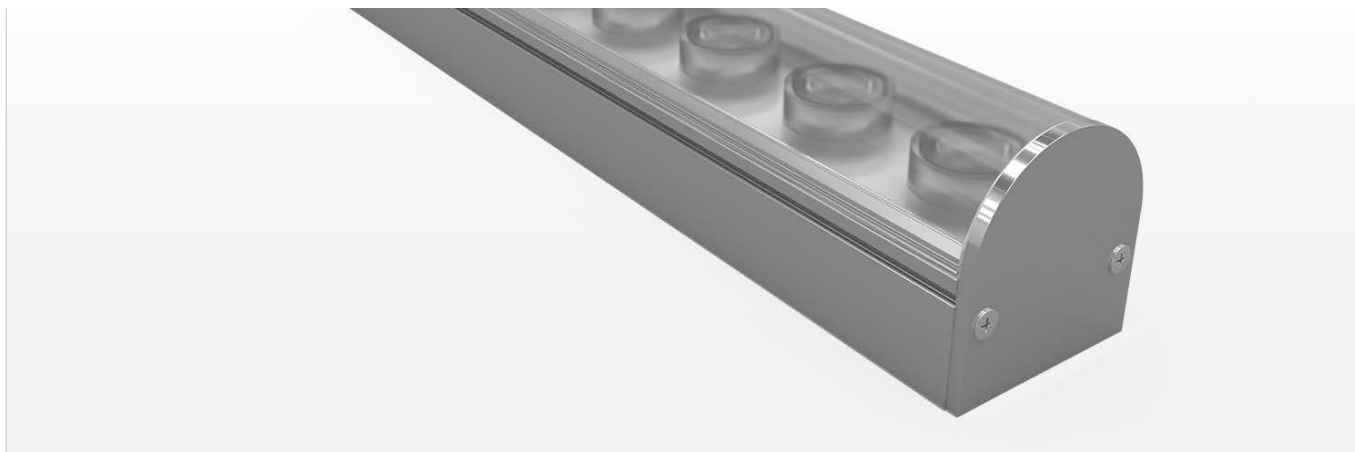

PRODUCT SPECIFICATION

Name	FLEXI GRAZER
Description	Flexi Grazer, 4000 K, 24 V, 16.69W/m
Lifetime	50000 hrs @45°C


COLOUR/TEMPERATURE CHARACTERISTICS

Correlated Colour Temp (CCT)	3895 K
Colour Rendering Index (CRI, Ra)	84.3
Chromaticity coordinates (CIE 1931 - x,y)	0.3853, 0.3799

LIGHT OUTPUT

Luminaire efficacy (lm/W)	134.76 lm/W
Luminous flux	2249 lm/m
Beam angle	20°

TECHNICAL DRAWING

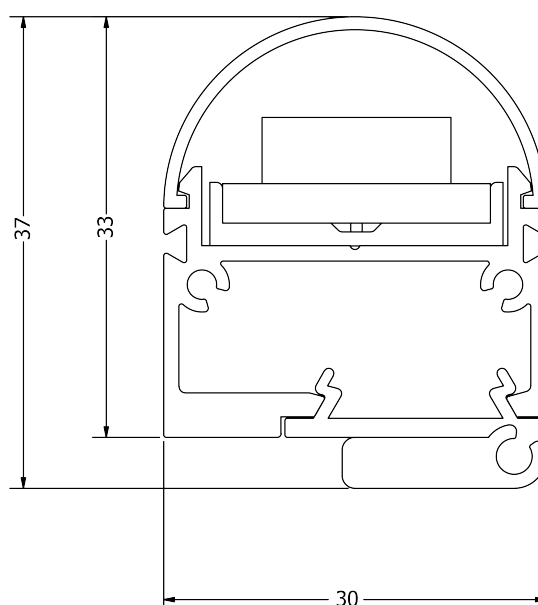

PHYSICAL CHARACTERISTICS

Section Dimensions	W = 30 mm / H = 37 mm
LED Pitch	23.80 mm
Mounting	Swivel Clip
IP Rating	IP 65
Profile Colour	White / Black


ELECTRICAL CHARACTERISTICS

Power Consumption	16.69 W
Supply Voltage	24V DC
Supply Current	0.6955 A
Operating Temp	0-50 °C
Control	0-10 V/DMX/DALI
Qty/Length of tested products	1 x 1000 mm
Connection	Male/female connectors

COLOUR RENDERING INDEX

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
84	89	93	85	83	85	88	68	16	73	85	58	85	96	78

CHROMACITY DIAGRAM

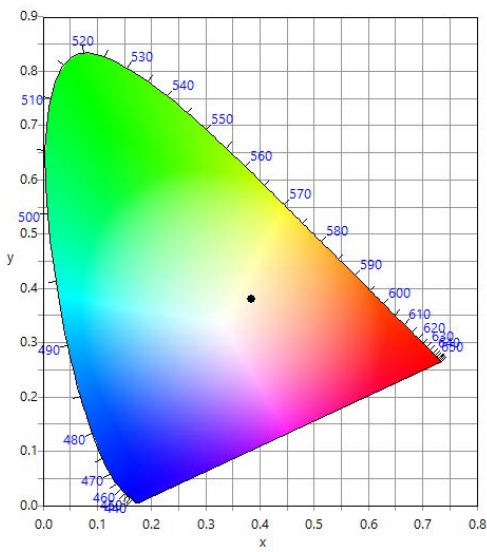

SPECTRAL RADIANT FLUX VERSUS WAVELENGTH

