



## GENERAL SPECIFICATION

**Body and Trim:** Steel and aluminum.

**Suspension:** One stainless steel aircraft cable.

**Power Cable:** Silver braided.

**Finials:** Cylindrical buttons (CB), brushed stainless steel.

**Finish:** Canopy and tube suspension, white powder coated.

**Driver:** HFP for 120–277V (EU-240V), 0–10V, 10% dimming standard.


**Remote Emergency:** Emergency option provides a 1.5 hour (3 hours for EU) emergency lighting facility. The remote system includes the inverter module, NiCad batteries and a remote wall/ceiling LED charge indicator and test switch (NA only) Maximum distance between wall/ceiling plate and luminaire is 4.5m/15'. Test switch fits a single gang box (not supplied).

**Mechanical:** Mounts directly to or over an electrical junction box (by others - North America only).


**L70 @25deg C (77deg F):** > 50,000.

**Delivered Lumens:** Delivered lumens & LPW based on 3000K (min 80 CRI) for White LEDs only.


## MOUNTING & OPTICS




Suspended 2 sides




Suspended 3 sides




42 1000




42 1001




42 1002




42 1003




42 1100



42 1101



42 1102



42 1103

## HOW TO ORDER

### A SPECIFY LUMINAIRE

Code:	Power (LED):	Height (A):	Diameter (D):	Delivered lms:	LPW:
42 1000	50W	762mm/30"	152mm/6"	4699	98
42 1001	50W	762mm/30"	203mm/8"	4889	102
42 1002	50W	762mm/30"	254mm/10"	5095	106
42 1003	50W	762mm/30"	305mm/12"	5332	111
42 1100	100W	1295mm/51"	152mm/6"	9397	98
42 1101	100W	1321mm/52"	203mm/8"	9778	102
42 1102	100W	1321mm/52"	254mm/10"	10190	106
42 1103	100W	1321mm/52"	305mm/12"	10663	111

### B SPECIFY CCT/COLOR

30	3000K (min 80 CRI)
35	3500K (min 80 CRI)
40	4000K (min 80 CRI)
RD	Red
GN	Green
BL	Blue

### C SPECIFY TUBE SUSPENSION OPTIONS

TS1	457mm/18" Tube Suspension (white)
TS2	610mm/24" Tube Suspension (white)
TS3	762mm/30" Tube Suspension (white)
TS4	914mm/36" Tube Suspension (white)

### D SPECIFY DOWNLIGHT OPTIONS

X1	Xacara downlight 26W LED 3000K ( 1843lm delivered)
X2	Xacara downlight 26W LED 3500K ( 1880lm delivered)
X3	Xacara downlight 26W LED 4000K ( 1917lm delivered)

### E SPECIFY DOWNLIGHT FINISH (FOR X1, X2 OR X3 OPTION ONLY)

MS	Metallic Silver
WH	White

#### Additional Information

Not applicable to 421000 and 421100.


### F SPECIFY OPTIONS

RE	Remote Emergency (max distance 15ft)
DE	End diffuser c/w decorative claws (claws finished to match finials, not available with X1, X2 or X3)

### EXAMPLE CODE

421000/30

## DIMENSIONAL DIAGRAMS

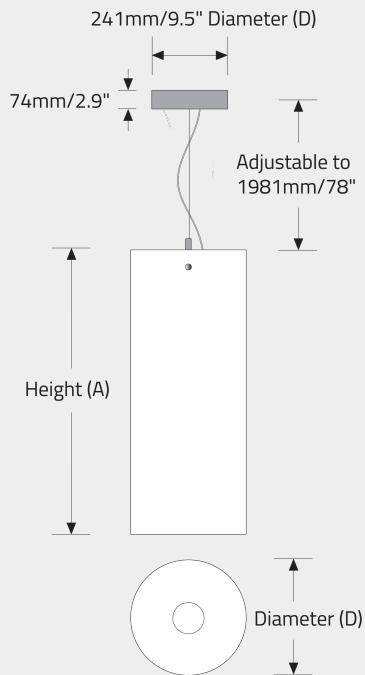

## APPROVALS

