



Indoor | Recessed luminaires | Yori Linear recessed continuous line

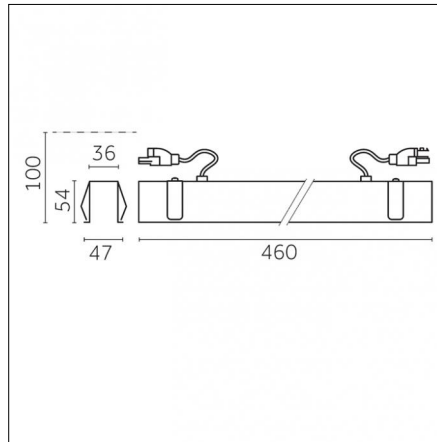

**CUT
OUT**

470x40mm

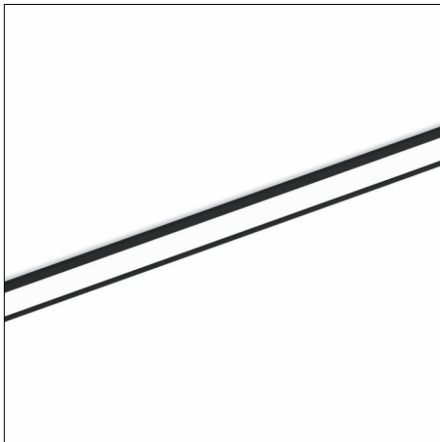

Wide 77°

12

IP43



Risk 0

850°



Code 0.CH020.HQ12

Light source features

Number of light sources: 1

Source type: LED HQ

Watt: 13W

Lm: 1552lm

Lm/W: 119lm/W

Kelvin/CRI: 3000K / >90

SDCM/L70 B10: / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off 220/240 Vac 50/60 Hz

Total power consumption (LED + DRIVER): 15W

Isolation class: Class I

Optical features

Beam angle: 77°

Optical type, adjustability: Fixed

Interchangeable optic (IOS): NO

Physical features

Material: aluminum

Diffusing screen: Opal

Mounting: Recessed

Fixing: Ceiling

Finishing: Embossed matt white (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net



Photometries



Yori Linear Recessed 460mm_13W_IE

Yori Linear Recessed 460mm_13W_LL



Accessories



Code 0.26156.0012 - End cap (2pcs)

Type: Mounting

Finishing: Embossed matt white (Standard)





Code 0.26156.0031 - End cap (2pcs)

Type: Mounting

Finishing: Embossed matt black (Standard)

Indoor | Recessed luminaires | Yori Linear recessed continuous line

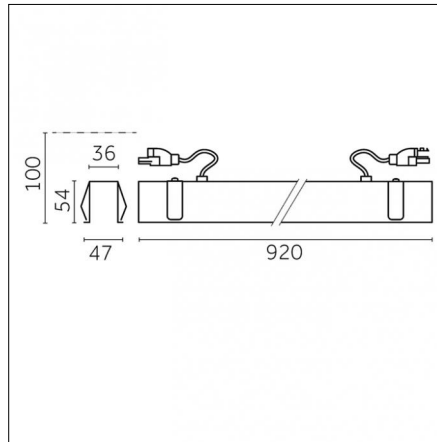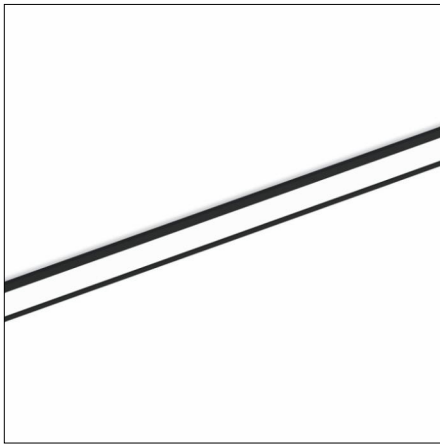

**CUT
OUT**

930x40mm



Wide 77°

12

IP43



Risk 0

850°



Code 0.CH050.HQ12

Light source features

Number of light sources: 1

Source type: LED HQ

Watt: 26W

Lm: 3000lm

Lm/W: 115lm/W

Kelvin/CRI: 3000K / >90

SDCM/L70 B10: / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off 220/240 Vac 50/60 Hz

Total power consumption (LED + DRIVER): 28W

Isolation class: Class I

Optical features

Beam angle: 77°

Optical type, adjustability: Fixed

Interchangeable optic (IOS): NO

Physical features

Material: aluminum

Diffusing screen: Opal

Mounting: Recessed

Fixing: Ceiling

Finishing: Embossed matt white (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net



Photometries



Yori Linear Recessed 920mm_26W_IE

Yori Linear Recessed 920mm_26W_LL



Accessories



Code 0.26156.0012 - End cap (2pcs)

Type: Mounting

Finishing: Embossed matt white (Standard)





Code 0.26156.0031 - End cap (2pcs)

Type: Mounting

Finishing: Embossed matt black (Standard)

Indoor | Recessed luminaires | Yori Linear recessed continuous line

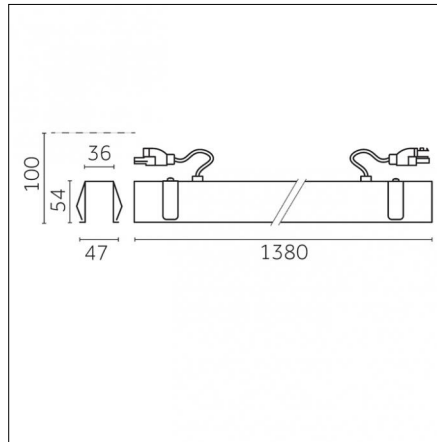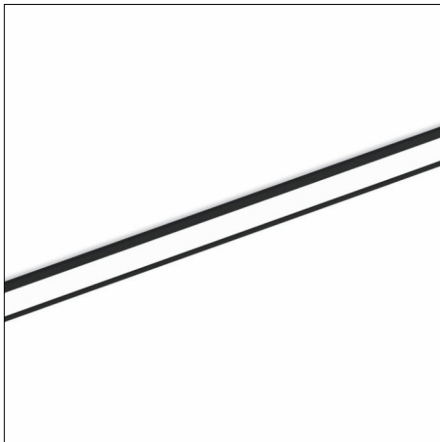

**CUT
OUT**

1390x40mm



Wide 77°

12

IP43



Risk 0

850°



Code 0.CH070.HQ12

Light source features

Number of light sources: 1

Source type: LED HQ

Watt: 38W

Lm: 4691lm

Lm/W: 123lm/W

Kelvin/CRI: 3000K / >90

SDCM/L70 B10: / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off 220/240 Vac 50/60 Hz

Total power consumption (LED + DRIVER): 43W

Isolation class: Class I

Optical features

Beam angle: 77°

Optical type, adjustability: Fixed

Interchangeable optic (IOS): NO

Physical features

Material: aluminum

Diffusing screen: Opal

Mounting: Recessed

Fixing: Ceiling

Finishing: Embossed matt white (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net



Photometries



Yori Linear Recessed 1380mm_38W_L

Yori Linear Recessed 1380mm_38W_L



Accessories



Code 0.26156.0012 - End cap (2pcs)

Type: Mounting

Finishing: Embossed matt white (Standard)





Code 0.26156.0031 - End cap (2pcs)

Type: Mounting

Finishing: Embossed matt black (Standard)

Indoor | Recessed luminaires | Yori Linear recessed continuous line

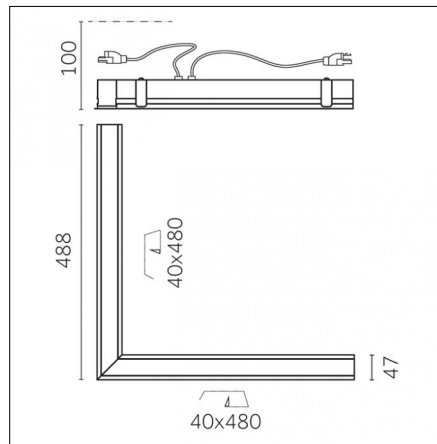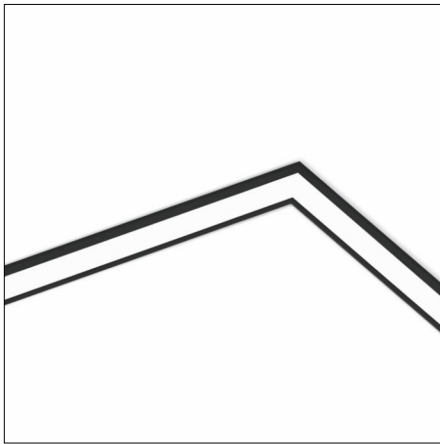

**CUT
OUT**

40x480 – 40x480mm



Wide 77°

12

IP43



Risk 0

850°



Code 0.DH050.HQ12

Light source features

Number of light sources: 1

Source type: LED HQ

Watt: 26W

Lm: 3000lm

Lm/W: 115lm/W

Kelvin/CRI: 3000K / >90

SDCM/L70 B10: / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off 220/240 Vac 50/60 Hz

Total power consumption (LED + DRIVER): 28W

Isolation class: Class I

Optical features

Beam angle: 77°

Optical type, adjustability: Fixed

Interchangeable optic (IOS): NO

Physical features

Material: aluminum

Diffusing screen: Opal

Mounting: Recessed

Fixing: Ceiling

Finishing: Embossed matt white (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999



www.reggiani.net
contact@reggiani.net

Photometries



Yori Linear Recessed_IES.zip
Yori Linear Recessed_LDT (1).zip



Accessories



Code 0.26156.0012 - End cap (2pcs)

Type: Mounting

Finishing: Embossed matt white (Standard)



Code 0.26156.0031 - End cap (2pcs)

Type: Mounting

Finishing: Embossed matt black (Standard)