











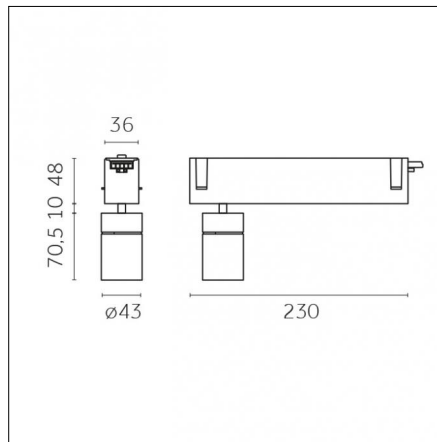

Indoor | Modular systems | Yori Channel



 Very narrow 8°	12	IP20	 Risk 1	850°	 NO							
---	----	------	--	------	--	---	--	---	---	---	---	---

Code 0.FM21B.HQ12

Light source features

Number of light sources: 1
Source type: LED HQ
Watt: 4W
Lm: 415lm
Lm/W: 104lm/W
Kelvin/CRI: 3000K / >90
SDCM/L90 B10: < 3 / 50000

Electrical features

Driver included: YES
Driver position: integrated
Driver type: On-Off
Isolation class: Class I

Optical features

Beam angle: 8°
Optical type, adjustability: Adjustable
Interchangeable optic (IOS): YES

Physical features

Material: Die-cast aluminium
Fixing: Ceiling
Adjustability: 356° horizontal axis 90° vertical axis
Finishing: Embossed matt white (Standard)
Weight: 0.5Kg

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione
 Viale Monza, 16 20845 Sovico (MB) Italy
 Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
 contact@reggiani.net

Photometries





Specifications text

YORI
Track, channel, recessed and surface mounting fixture. Symmetrical output. Available for LED and metal halide lamps. Die-cast aluminium body. Interchangeable IOS Ø 50mm (LL1) and Ø 80mm (LL2) reflectors in polycarbonate stabilised up to 140° with highly reflective metal coating - exclusive anti-scratch treatment with surface vitrification for LED lamps. Interchangeable IOS Ø 80mm reflectors in 99.99% pure aluminium, with bayonet fitting for metal halide lamps. Anti-static polycarbonate protective screen with a high transmission index (97%); transparent for very narrow light beams, satin for narrow, medium and wide beams and satin/prismatic for the Mira version; anti-yellowing, stabilised against UV rays, resistant to 850° incandescent wire test, self-extinguishing V0; tempered protective glass for IOS reflectors for metal halide lamps Spot adjustable 0° to 90° vertically and 356° horizontally; integrated plastic no-glare screen; recessed optics for improved visual comfort; mounts to false ceilings with the innovative ClikFix one-way spring system (for recessed, semi-recessed and surface mounted versions); drilled bezel for fine mortaring with 0.7 mm trimless bezel thickness for perfect plastering (recessed version); special perforated steel panel maximises heat dispersal outwards (recessed version); vertical slide for moving the luminaire outwards (recessed version); grub screw for locking the adjustment (recessed version); mechanical/electrical connector with m/f connectors (channel version); up to 10 units can be connected in line with a single power supply (channel version); articulated boom for orienting the fixture (for coves, false ceiling and surround versions); available as pre-assembled KIT version with 2, 3 and 4 fixtures for channel, surface and trimless mounting. Anti-yellowing epoxy powder coating, stabilised against UV rays. Product available with the following finishes: matt embossed white 12, matt embossed black 31. Passive heat dissipation via optimised fixture casing construction, which uses the heat conductivity of the metal and convective currents. Available with LED ON/OFF driver, DIMM 1-10V, PHASE CUTTING and DALI 220/240V VAC 50/60 Hz. Electronic driver for LED lamps, electronic power supply for metal halide lamps. Driver/power supply included in package. Isolation class II and III. IP20. The product can be equipped with: cross grille, no-glare honeycomb grille and UV, IR, dichroic and selective filters for food applications. Emergency unit (3 hour) available as accessory equipment. Fixture built in compliance with Standard EN 60598-1 and amendments and EC Directives 2006/95/CE (low voltage), 2004/108/CE (EMC), 2009/125/CE (Ecodesign), 2002/96/CE (RAEE), 2011/65/CE (RoHS).


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Tracks/channels





Code 0.25402.0012 - Recessed channel

Finishing: Embossed matt white (Standard)
 Length: 2400mm Width: 41mm Height: 58mm
 Description: l. mm 2400




Code 0.25402.0031 - Recessed channel

Finishing: Embossed matt black (Standard)
 Length: 2400mm Width: 41mm Height: 58mm
 Description: l. mm 2400





Code 0.25811.0012 - Recessed channel

Finishing: Embossed matt white (Standard)
 Length: 2300mm Width: 41mm Height: 52mm
 Description: l. mm 2300





Code 0.25811.0031 - Recessed channel

Finishing: Embossed matt black (Standard)
 Length: 2300mm Width: 41mm Height: 52mm
 Description: l. mm 2300



Code 0.25401.0012 - Surface and suspension channel

Finishing: Embossed matt white (Standard)
 Length: 2400mm Width: 41mm Height: 56.5mm
 Description: l. mm 2400mm





Code 0.25401.0031 - Surface and suspension channel

Finishing: Embossed matt black (Standard)
 Length: 2400mm Width: 41mm Height: 56.5mm
 Description: l. mm 2400mm



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Tracks/channels



Code 0.25801.0012 - Surface and suspension channel


Finishing: Embossed matt white (Standard)
Length: 2300mm Width: 41mm Height: 56.5mm
Description: l. mm 2300mm



Code 0.25801.0031 - Surface and suspension channel


Finishing: Embossed matt black (Standard)
Length: 2300mm Width: 41mm Height: 56.5mm
Description: l. mm 2300mm

Accessories




Code 0.26401.004A - Red glass filter 1 mm

Type: Optical
Finishing: Red




Code 0.26401.005A - Green glass filter 1 mm

Type: Optical
Finishing: Green




Code 0.26401.006A - Blue glass filter 1 mm

Type: Optical
Finishing: Blue




Code 0.26401.007A - Pink glass filter 1 mm

Type: Optical
Finishing: Pink



Code 0.26401.008A - Yellow glass filter 1 mm


Type: Optical
Finishing: Yellow



Code 0.26401.009A - Orange glass filter 1 mm

Type: Optical
Finishing: Orange


Accessories



Code 0.25435.0012 - Emergency Pack

Type: Electrical
 Finishing: Embossed matt white (Standard)
 Description:


3W LED / Emergency mode only / Automatic operation / High temperature Ni-Cd batteries / Charge indicator with led bi-color / Protection device against extensive discharge / Conformity with current standards: EN61347-2-13, EN61347-2-7, EN61547, EN55015, EN60598-2-22, EN61000-3-2, SELV.



Code 0.25435.0031 - Emergency Pack



Type: Electrical
 Finishing: Embossed matt black (Standard)
 Description:

3W LED / Emergency mode only / Automatic operation / High temperature Ni-Cd batteries / Charge indicator with led bi-color / Protection device against extensive discharge / Conformity with current standards: EN61347-2-13, EN61347-2-7, EN61547, EN55015, EN60598-2-22, EN61000-3-2, SELV.





Code 0.26409.0000 - Colored Gel Slides (2 pieces)

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26417.0000 - Selective filter 2700K - 2500K

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26425.0000 - Selective filter 2700K - 2200K

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26433.0000 - Selective filter 2700K - 2000K

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Accessories



Code 0.26441.0000 - Honeycomb dense texture

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26449.0000 - Honeycomb wide texture

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26461.0000 - Opal lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26469.0000 - Diffusive lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26480.0000 - Cross blade louvre

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26492.0000 - Ribbed glass

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Accessories





Code 0.26496.0012 - Cone 45 ° wall washer

Type: Optical
Finishing: Embossed matt white (Standard)





Code 0.26496.0031 - Cone 45 ° wall washer

Type: Optical
Finishing: Embossed matt black (Standard)




Code 0.26558.0000 - Selective filter 3000K-2700K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26566.0000 - Selective filter 3000K-3600K


Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26574.0000 - Selective filter 3000K-4000K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Indoor | Modular systems | Yori Channel

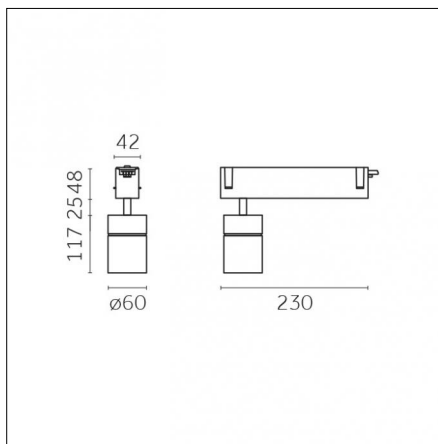

Narrow 13°

12

IP20



Risk 1

850°



Code 0.GM22B.HC12

Light source features

Number of light sources: 1

Source type: LED HC

Watt: 9W

Lm: 960lm

Lm/W: 107lm/W

Kelvin/CRI: 3000K / >98

SDCM/L90 B10: < 2 / 50000

Fixture total output: 797 lm

Fixture efficacy: 77 lm/W

Imax: 10201 cd

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off

Isolation class: Class I

Optical features

Beam angle: 13°

Optical type, adjustability: Adjustable

Interchangeable optic (IOS): YES

Physical features

Material: Die-cast aluminium

Fixing: Ceiling

Adjustability: 356° horizontal axis 90° vertical axis

Finishing: Embossed matt white (Standard)

Weight: 0.65Kg



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net

Photometries

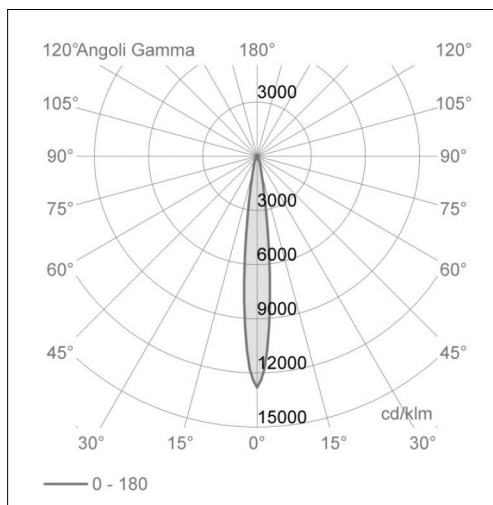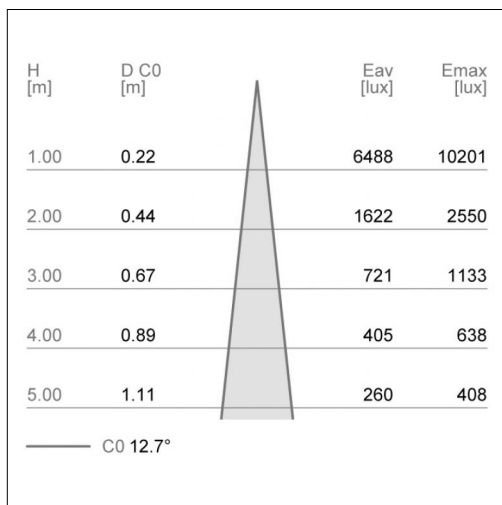

0_GM22B_HC_12.ies

0_GM22B_HC_12.LDT

Specifications text

YORI

Track, channel, recessed and surface mounting fixture. Symmetrical output. Available for LED and metal halide lamps. Die-cast aluminium body. Interchangeable IOS Ø 50mm (LL1) and Ø 80mm (LL2) reflectors in polycarbonate stabilised up to 140° with highly reflective metal coating - exclusive anti-scratch treatment with surface vitrification for LED lamps. Interchangeable IOS Ø 80mm reflectors in 99.99% pure aluminium, with bayonet fitting for metal halide lamps. Anti-static polycarbonate protective screen with a high transmission index (97%); transparent for very narrow light beams, satin for narrow, medium and wide beams and satin/prismatic for the Mira version; anti-yellowing, stabilised against UV rays, resistant to 850° incandescent wire test, self-extinguishing V0; tempered protective glass for IOS reflectors for metal halide lamps Spot adjustable 0° to 90° vertically and 356° horizontally; integrated plastic no-glare screen; recessed optics for improved visual comfort; mounts to false ceilings with the innovative KlikFix one-way spring system (for recessed, semi-recessed and surface mounted versions); drilled bezel for fine mortaring with 0.7 mm trimless bezel thickness for perfect plastering (recessed version); special perforated steel panel maximises heat dispersal outwards (recessed version); vertical slide for moving the luminaire outwards (recessed version); grub screw for locking the adjustment (recessed version); mechanical/electrical connector with m/f connectors (channel version); up to 10 units can be connected in line with a single power supply (channel version); articulated boom for orienting the fixture (for coves, false ceiling and surround versions); available as pre-assembled KIT version with 2, 3 and 4 fixtures for channel, surface and trimless mounting. Anti-yellowing epoxy powder coating, stabilised against UV rays. Product available with the following finishes: matt embossed white 12, matt embossed black 31. Passive heat dissipation via optimised fixture casing construction, which uses the heat conductivity of the metal and convective currents. Available with LED ON/OFF driver, DIMM 1-10V, PHASE CUTTING and DALI 220/240V VAC 50/60 Hz. Electronic driver for LED lamps, electronic power supply for metal halide lamps. Driver/power supply included in package. Isolation class II and III. IP20. The product can be equipped with: cross grille, no-glare honeycomb grille and UV, IR, dichroic and selective filters for food applications. Emergency unit (3 hour) available as accessory equipment. Fixture built in compliance with Standard EN 60598-1 and amendments and EC Directives 2006/95/CE (low voltage), 2004/108/CE (EMC), 2009/125/CE (Ecodesign), 2002/96/CE (RAEE), 2011/65/CE (RoHS).



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999



www.reggiani.net
contact@reggiani.net

Tracks/channels





Code 0.25402.0012 - Recessed channel

Finishing: Embossed matt white (Standard)
Length: 2400mm Width: 41mm Height: 58mm
Description: l. mm 2400





Code 0.25402.0031 - Recessed channel

Finishing: Embossed matt black (Standard)
Length: 2400mm Width: 41mm Height: 58mm
Description: l. mm 2400





Code 0.25811.0012 - Recessed channel

Finishing: Embossed matt white (Standard)
Length: 2300mm Width: 41mm Height: 52mm
Description: l. mm 2300





Code 0.25811.0031 - Recessed channel

Finishing: Embossed matt black (Standard)
Length: 2300mm Width: 41mm Height: 52mm
Description: l. mm 2300



Code 0.25401.0012 - Surface and suspension channel

Finishing: Embossed matt white (Standard)
Length: 2400mm Width: 41mm Height: 56.5mm
Description: l. mm 2400mm





Code 0.25401.0031 - Surface and suspension channel

Finishing: Embossed matt black (Standard)
Length: 2400mm Width: 41mm Height: 56.5mm
Description: l. mm 2400mm



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Tracks/channels



Code 0.25801.0012 - Surface and suspension channel


Finishing: Embossed matt white (Standard)
Length: 2300mm Width: 41mm Height: 56.5mm
Description: l. mm 2300mm



Code 0.25801.0031 - Surface and suspension channel

Finishing: Embossed matt black (Standard)
Length: 2300mm Width: 41mm Height: 56.5mm
Description: l. mm 2300mm

Optics




Code 0.35145.0000 - Ø60mm performance optic 13° - LED

Finishing:
Description:



Narrow 13°




Code 0.35146.0000 - Ø60mm performance optic 24° - LED

Finishing:
Description:



Medium 24°




Code 0.35147.0000 - Ø60mm performance optic 39° - LED

Finishing:
Description:




Medium-wide 38°

Accessories




Code 0.26403.004A - Red glass filter 1 mm

Type: Optical
Finishing: Red




Code 0.26403.005A - Green glass filter 1 mm

Type: Optical
Finishing: Green




Code 0.26403.006A - Blue glass filter 1 mm

Type: Optical
Finishing: Blue




Code 0.26403.007A - Pink glass filter 1 mm

Type: Optical
Finishing: Pink



Code 0.26403.008A - Yellow glass filter 1 mm


Type: Optical
Finishing: Yellow



Code 0.26403.009A - Orange glass filter 1 mm

Type: Optical
Finishing: Orange


Accessories



Code 0.25435.0012 - Emergency Pack

Type: Electrical
 Finishing: Embossed matt white (Standard)
 Description:


3W LED / Emergency mode only / Automatic operation / High temperature Ni-Cd batteries / Charge indicator with led bi-color / Protection device against extensive discharge / Conformity with current standards: EN61347-2-13, EN61347-2-7, EN61547, EN55015, EN60598-2-22, EN61000-3-2, SELV.



Code 0.25435.0031 - Emergency Pack



Type: Electrical
 Finishing: Embossed matt black (Standard)
 Description:

3W LED / Emergency mode only / Automatic operation / High temperature Ni-Cd batteries / Charge indicator with led bi-color / Protection device against extensive discharge / Conformity with current standards: EN61347-2-13, EN61347-2-7, EN61547, EN55015, EN60598-2-22, EN61000-3-2, SELV.





Code 0.26411.0000 - Colored Gel Slides (2 pieces)

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26419.0000 - Selective filter 2700K - 2500K

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26427.0000 - Selective filter 2700K - 2200K

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26435.0000 - Selective filter 2700K - 2000K

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Accessories



Code 0.26443.0000 - Honeycomb dense texture

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26451.0000 - Honeycomb wide texture

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26463.0000 - Opal lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26471.0000 - Diffusive lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26481.0000 - Cross blade louver

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)





Code 0.26493.0000 - Ribbed glass

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Accessories



Code 0.26560.0000 - Selective filter 3000K-2700K

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26568.0000 - Selective filter 3000K-3600K

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26576.0000 - Selective filter 3000K-4000K

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26650.0021 - Framing accessory, light shape - round

Type: Optical

Finishing: Black (Standard)

Indoor | Modular systems | Yori Channel

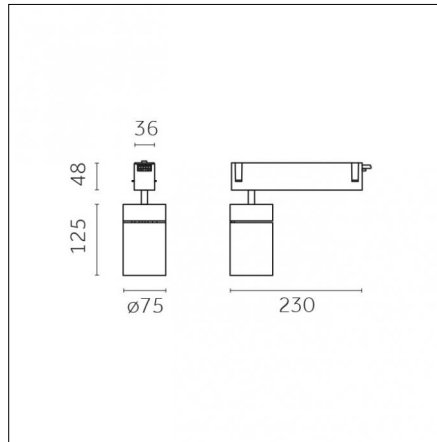

	Narrow 12°	12	IP20		Risk 1	850°					EAC		CE	CB
--	------------	-----------	------	--	--------	------	--	--	--	--	-----	--	----	----

Code 0.LM23B.HC12

Light source features

Number of light sources: 1
Source type: LED HC
Watt: 12W
Lm: 1323lm
Lm/W: 110lm/W
Kelvin/CRI: 3000K / >98
SDCM/L90 B10: < 2 / 50000

Electrical features

Driver included: YES
Driver position: integrated
Driver type: On-Off
Isolation class: Class I

Optical features

Beam angle: 12°
Optical type, adjustability: Adjustable
Interchangeable optic (IOS): YES

Physical features



Material: Die-cast aluminium
Fixing: Ceiling
Adjustability: 356° horizontal axis 90° vertical axis
Finishing: Embossed matt white (Standard)
Weight: 0.95Kg

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione
 Viale Monza, 16 20845 Sovico (MB) Italy
 Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
 contact@reggiani.net

Photometries

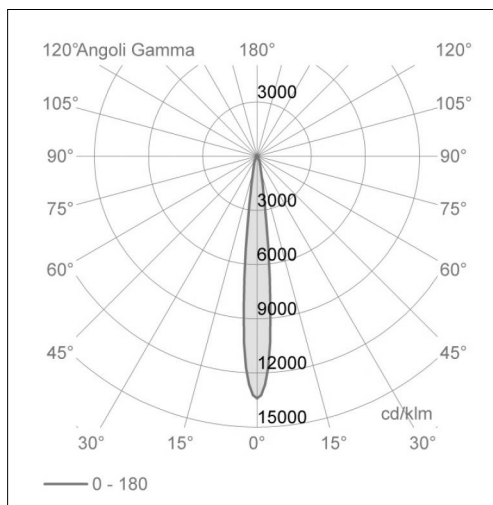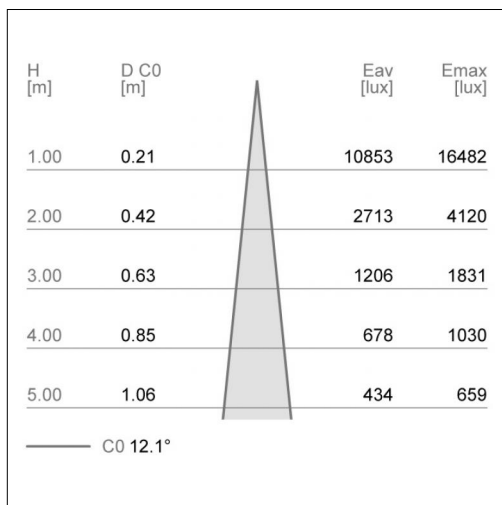

0_LM23B_HC_12.ies
0_LM23B_HC_12.LDT



Specifications text

YORI

Track, channel, recessed and surface mounting fixture. Symmetrical output. Available for LED and metal halide lamps. Die-cast aluminium body. Interchangeable IOS Ø 50mm (LL1) and Ø 80mm (LL2) reflectors in polycarbonate stabilised up to 140° with highly reflective metal coating - exclusive anti-scratch treatment with surface vitrification for LED lamps. Interchangeable IOS Ø 80mm reflectors in 99.99% pure aluminium, with bayonet fitting for metal halide lamps. Anti-static polycarbonate protective screen with a high transmission index (97%); transparent for very narrow light beams, satin for narrow, medium and wide beams and satin/prismatic for the Mira version; anti-yellowing, stabilised against UV rays, resistant to 850° incandescent wire test, self-extinguishing V0; tempered protective glass for IOS reflectors for metal halide lamps Spot adjustable 0° to 90° vertically and 356° horizontally; integrated plastic no-glare screen; recessed optics for improved visual comfort; mounts to false ceilings with the innovative KlikFix one-way spring system (for recessed, semi-recessed and surface mounted versions); drilled bezel for fine mortaring with 0.7 mm trimless bezel thickness for perfect plastering (recessed version); special perforated steel panel maximises heat dispersal outwards (recessed version); vertical slide for moving the luminaire outwards (recessed version); grub screw for locking the adjustment (recessed version); mechanical/electrical connector with m/f connectors (channel version); up to 10 units can be connected in line with a single power supply (channel version); articulated boom for orienting the fixture (for coves, false ceiling and surround versions); available as pre-assembled KIT version with 2, 3 and 4 fixtures for channel, surface and trimless mounting. Anti-yellowing epoxy powder coating, stabilised against UV rays. Product available with the following finishes: matt embossed white 12, matt embossed black 31. Passive heat dissipation via optimised fixture casing construction, which uses the heat conductivity of the metal and convective currents. Available with LED ON/OFF driver, DIMM 1-10V, PHASE CUTTING and DALI 220/240V VAC 50/60 Hz. Electronic driver for LED lamps, electronic power supply for metal halide lamps. Driver/power supply included in package. Isolation class II and III. IP20. The product can be equipped with: cross grille, no-glare honeycomb grille and UV, IR, dichroic and selective filters for food applications. Emergency unit (3 hour) available as accessory equipment. Fixture built in compliance with Standard EN 60598-1 and amendments and EC Directives 2006/95/CE (low voltage), 2004/108/CE (EMC), 2009/125/CE (Ecodesign), 2002/96/CE (RAEE), 2011/65/CE (RoHS).



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Tracks/channels





Code 0.25402.0012 - Recessed channel

Finishing: Embossed matt white (Standard)
 Length: 2400mm Width: 41mm Height: 58mm
 Description: l. mm 2400





Code 0.25402.0031 - Recessed channel

Finishing: Embossed matt black (Standard)
 Length: 2400mm Width: 41mm Height: 58mm
 Description: l. mm 2400





Code 0.25811.0012 - Recessed channel

Finishing: Embossed matt white (Standard)
 Length: 2300mm Width: 41mm Height: 52mm
 Description: l. mm 2300





Code 0.25811.0031 - Recessed channel

Finishing: Embossed matt black (Standard)
 Length: 2300mm Width: 41mm Height: 52mm
 Description: l. mm 2300



Code 0.25401.0012 - Surface and suspension channel

Finishing: Embossed matt white (Standard)
 Length: 2400mm Width: 41mm Height: 56.5mm
 Description: l. mm 2400mm





Code 0.25401.0031 - Surface and suspension channel

Finishing: Embossed matt black (Standard)
 Length: 2400mm Width: 41mm Height: 56.5mm
 Description: l. mm 2400mm



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Tracks/channels



Code 0.25801.0012 - Surface and suspension channel


Finishing: Embossed matt white (Standard)
Length: 2300mm Width: 41mm Height: 56.5mm
Description: l. mm 2300mm



Code 0.25801.0031 - Surface and suspension channel

Finishing: Embossed matt black (Standard)
Length: 2300mm Width: 41mm Height: 56.5mm
Description: l. mm 2300mm

Optics




Optic included - Code 0.35150.0000 - Ø75mm performance optic 12° - LED

Finishing:
Description:



Narrow 12°




Code 0.35151.0000 - Ø75mm performance optic 23° - LED

Finishing:
Description:



Medium 23°




Code 0.35152.0000 - Ø75mm performance optic 48° - LED

Finishing:
Description:



Medium-wide 48°




Code 0.35153.0000 - Ø75mm performance optic 37° - LED

Finishing:
Description:




Medium-wide 37°

Accessories




Code 0.26405.004A - Red glass filter 1 mm

Type: Optical
Finishing: Red




Code 0.26405.005A - Green glass filter 1 mm

Type: Optical
Finishing: Green




Code 0.26405.006A - Blue glass filter 1 mm

Type: Optical
Finishing: Blue




Code 0.26405.007A - Pink glass filter 1 mm

Type: Optical
Finishing: Pink



Code 0.26405.008A - Yellow glass filter 1 mm


Type: Optical
Finishing: Yellow



Code 0.26405.009A - Orange glass filter 1 mm

Type: Optical
Finishing: Orange


Accessories



Code 0.25435.0012 - Emergency Pack

Type: Electrical
 Finishing: Embossed matt white (Standard)
 Description:


3W LED / Emergency mode only / Automatic operation / High temperature Ni-Cd batteries / Charge indicator with led bi-color / Protection device against extensive discharge / Conformity with current standards: EN61347-2-13, EN61347-2-7, EN61547, EN55015, EN60598-2-22, EN61000-3-2, SELV.



Code 0.25435.0031 - Emergency Pack


Type: Electrical
 Finishing: Embossed matt black (Standard)
 Description:

3W LED / Emergency mode only / Automatic operation / High temperature Ni-Cd batteries / Charge indicator with led bi-color / Protection device against extensive discharge / Conformity with current standards: EN61347-2-13, EN61347-2-7, EN61547, EN55015, EN60598-2-22, EN61000-3-2, SELV.





Code 0.26413.0000 - Colored Gel Slides (2 pieces)

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26421.0000 - Selective filter 2700K - 2500K

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26429.0000 - Selective filter 2700K - 2200K

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26437.0000 - Selective filter 2700K - 2000K

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Accessories



Code 0.26445.0000 - Honeycomb dense texture

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26453.0000 - Honeycomb wide texture

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26465.0000 - Opal lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26473.0000 - Diffusive lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26482.0000 - Cross blade louvre

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26494.0000 - Ribbed glass

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Accessories





Code 0.26498.0012 - Cone 45 ° wall washer

Type: Optical
Finishing: Embossed matt white (Standard)




Code 0.26498.0031 - Cone 45 ° wall washer

Type: Optical
Finishing: Embossed matt black (Standard)




Code 0.26562.0000 - Selective filter 3000K-2700K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26570.0000 - Selective filter 3000K-3600K



Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)









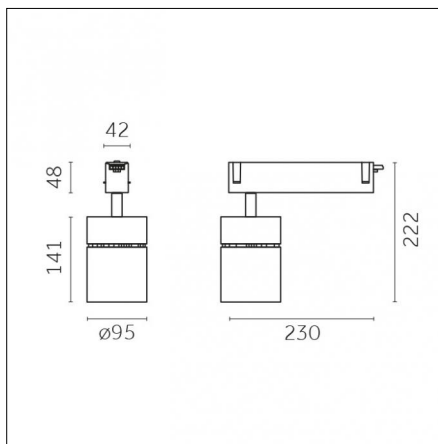



Code 0.26578.0000 - Selective filter 3000K-4000K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Indoor | Modular systems | Yori Channel



 Very narrow 10°	12	IP20	 Risk 1	850°								
--	----	------	--	------	---	---	--	---	---	---	---	---

Code 0.NM23B.HQ12

Light source features

Number of light sources: 1
Source type: LED HQ
Watt: 12W
Lm: 1533lm
Lm/W: 128lm/W
Kelvin/CRI: 3000K / >90
SDCM/L90 B10: < 2 / 50000

Electrical features

Driver included: YES
Driver position: integrated
Driver type: On-Off
Isolation class: Class I

Optical features



Beam angle: 10°
Optical type, adjustability: Adjustable
Interchangeable optic (IOS): YES

Physical features

Material: Die-cast aluminium
Fixing: Ceiling
Adjustability: 356° horizontal axis 90° vertical axis
Finishing: Embossed matt white (Standard)
Weight: 1.3Kg

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Photometries

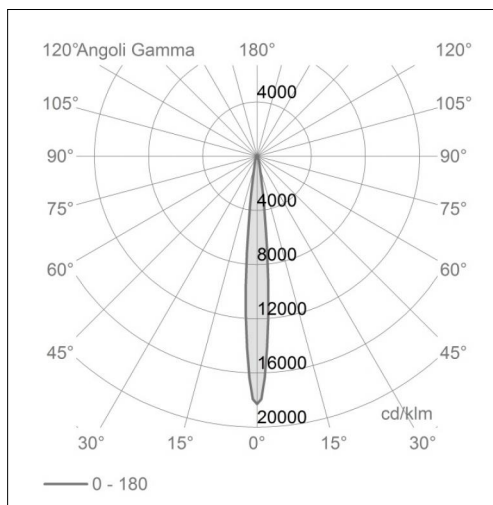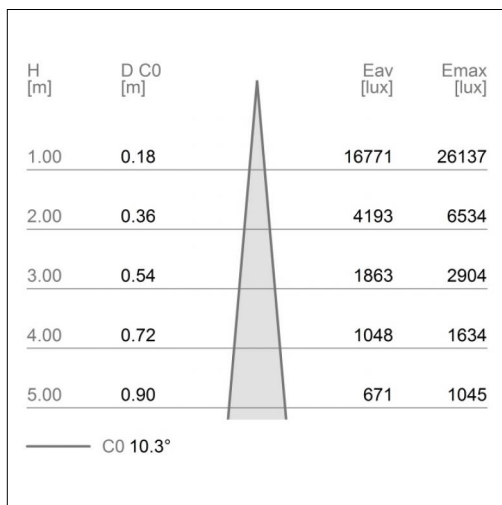

0_NM23B_HQ_12.ies

0_NM23B_HQ_12.LDT

Specifications text

YORI

Track, channel, recessed and surface mounting fixture. Symmetrical output. Available for LED and metal halide lamps. Die-cast aluminium body. Interchangeable IOS Ø 50mm (LL1) and Ø 80mm (LL2) reflectors in polycarbonate stabilised up to 140° with highly reflective metal coating - exclusive anti-scratch treatment with surface vitrification for LED lamps. Interchangeable IOS Ø 80mm reflectors in 99.99% pure aluminium, with bayonet fitting for metal halide lamps. Anti-static polycarbonate protective screen with a high transmission index (97%); transparent for very narrow light beams, satin for narrow, medium and wide beams and satin/prismatic for the Mira version; anti-yellowing, stabilised against UV rays, resistant to 850° incandescent wire test, self-extinguishing V0; tempered protective glass for IOS reflectors for metal halide lamps Spot adjustable 0° to 90° vertically and 356° horizontally; integrated plastic no-glare screen; recessed optics for improved visual comfort; mounts to false ceilings with the innovative KlikFix one-way spring system (for recessed, semi-recessed and surface mounted versions); drilled bezel for fine mortaring with 0.7 mm trimless bezel thickness for perfect plastering (recessed version); special perforated steel panel maximises heat dispersal outwards (recessed version); vertical slide for moving the luminaire outwards (recessed version); grub screw for locking the adjustment (recessed version); mechanical/electrical connector with m/f connectors (channel version); up to 10 units can be connected in line with a single power supply (channel version); articulated boom for orienting the fixture (for coves, false ceiling and surround versions); available as pre-assembled KIT version with 2, 3 and 4 fixtures for channel, surface and trimless mounting. Anti-yellowing epoxy powder coating, stabilised against UV rays. Product available with the following finishes: matt embossed white 12, matt embossed black 31. Passive heat dissipation via optimised fixture casing construction, which uses the heat conductivity of the metal and convective currents. Available with LED ON/OFF driver, DIMM 1-10V, PHASE CUTTING and DALI 220/240V VAC 50/60 Hz. Electronic driver for LED lamps, electronic power supply for metal halide lamps. Driver/power supply included in package. Isolation class II and III. IP20. The product can be equipped with: cross grille, no-glare honeycomb grille and UV, IR, dichroic and selective filters for food applications. Emergency unit (3 hour) available as accessory equipment. Fixture built in compliance with Standard EN 60598-1 and amendments and EC Directives 2006/95/CE (low voltage), 2004/108/CE (EMC), 2009/125/CE (Ecodesign), 2002/96/CE (RAEE), 2011/65/CE (RoHS).



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999



www.reggiani.net
contact@reggiani.net

Tracks/channels





Code 0.25402.0012 - Recessed channel

Finishing: Embossed matt white (Standard)
 Length: 2400mm Width: 41mm Height: 58mm
 Description: l. mm 2400





Code 0.25402.0031 - Recessed channel

Finishing: Embossed matt black (Standard)
 Length: 2400mm Width: 41mm Height: 58mm
 Description: l. mm 2400





Code 0.25811.0012 - Recessed channel

Finishing: Embossed matt white (Standard)
 Length: 2300mm Width: 41mm Height: 52mm
 Description: l. mm 2300





Code 0.25811.0031 - Recessed channel

Finishing: Embossed matt black (Standard)
 Length: 2300mm Width: 41mm Height: 52mm
 Description: l. mm 2300



Code 0.25401.0012 - Surface and suspension channel

Finishing: Embossed matt white (Standard)
 Length: 2400mm Width: 41mm Height: 56.5mm
 Description: l. mm 2400mm





Code 0.25401.0031 - Surface and suspension channel

Finishing: Embossed matt black (Standard)
 Length: 2400mm Width: 41mm Height: 56.5mm
 Description: l. mm 2400mm



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Tracks/channels



Code 0.25801.0012 - Surface and suspension channel


Finishing: Embossed matt white (Standard)
Length: 2300mm Width: 41mm Height: 56.5mm
Description: l. mm 2300mm



Code 0.25801.0031 - Surface and suspension channel

Finishing: Embossed matt black (Standard)
Length: 2300mm Width: 41mm Height: 56.5mm
Description: l. mm 2300mm

Optics




Code 0.35155.0000 - Ø95mm performance optic 10°-12° - LED

Finishing:
Description:



Very narrow 10°




Code 0.35156.0000 - Ø95mm performance optic 20° - LED

Finishing:
Description:



Medium 20°




Code 0.35157.0000 - Ø95mm performance optic 31° - LED

Finishing:
Description:



Medium 31°




Code 0.35158.0000 - Ø95mm performance optic 40° - LED

Finishing:
Description:




Medium-wide 40°

Accessories




Code 0.26407.004A - Red glass filter 1 mm

Type: Optical
Finishing: Red




Code 0.26407.005A - Green glass filter 1 mm

Type: Optical
Finishing: Green




Code 0.26407.006A - Blue glass filter 1 mm

Type: Optical
Finishing: Blue




Code 0.26407.007A - Pink glass filter 1 mm

Type: Optical
Finishing: Pink



Code 0.26407.008A - Yellow glass filter 1 mm

Type: Optical
Finishing: Yellow



Code 0.26407.009A - Orange glass filter 1 mm

Type: Optical
Finishing: Orange



Accessories



Code 0.26415.0000 - Colored Gel Slides (2 pieces)

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26423.0000 - Selective filter 2700K - 2500K

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26431.0000 - Selective filter 2700K - 2200K

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26439.0000 - Selective filter 2700K - 2000K

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26447.0000 - Honeycomb dense texture

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26455.0000 - Honeycomb wide texture

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)


Accessories



Code 0.26467.0000 - Opal lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26475.0000 - Diffusive lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26483.0000 - Cross blade louvre

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26495.0000 - Ribbed glass

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26499.0012 - Cone 45 ° wall washer

Type: Optical

Finishing: Embossed matt white (Standard)





Code 0.26499.0031 - Cone 45 ° wall washer

Type: Optical

Finishing: Embossed matt black (Standard)



Accessories



Code 0.26564.0000 - Selective filter 3000K-2700K

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26572.0000 - Selective filter 3000K-3600K

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26580.0000 - Selective filter 3000K-4000K

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Indoor | Modular systems | Yori Channel

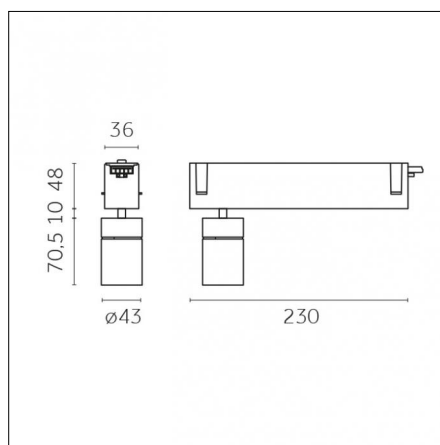

Very narrow 7°

12

IP20



Risk 1

850°



Code 0.FM11A.HQ12

Light source features

Number of light sources: 1

Source type: LED HQ

Watt: 4W

Lm: 415lm

Lm/W: 104lm/W

Kelvin/CRI: 3000K / >90

SDCM/L90 B10: < 3 / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off

Isolation class: Class I

Optical features

Beam angle: 7°

Optical type, adjustability: Adjustable

Interchangeable optic (IOS): YES

Physical features

Material: Die-cast aluminium

Fixing: Ceiling

Adjustability: 356° horizontal axis 90° vertical axis

Finishing: Embossed matt white (Standard)

Weight: 0.5Kg

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net

Photometries





Specifications text

YORI
Track, channel, recessed and surface mounting fixture. Symmetrical output. Available for LED and metal halide lamps. Die-cast aluminium body. Interchangeable IOS Ø 50mm (LL1) and Ø 80mm (LL2) reflectors in polycarbonate stabilised up to 140° with highly reflective metal coating - exclusive anti-scratch treatment with surface vitrification for LED lamps. Interchangeable IOS Ø 80mm reflectors in 99.99% pure aluminium, with bayonet fitting for metal halide lamps. Anti-static polycarbonate protective screen with a high transmission index (97%); transparent for very narrow light beams, satin for narrow, medium and wide beams and satin/prismatic for the Mira version; anti-yellowing, stabilised against UV rays, resistant to 850° incandescent wire test, self-extinguishing V0; tempered protective glass for IOS reflectors for metal halide lamps Spot adjustable 0° to 90° vertically and 356° horizontally; integrated plastic no-glare screen; recessed optics for improved visual comfort; mounts to false ceilings with the innovative KlikFix one-way spring system (for recessed, semi-recessed and surface mounted versions); drilled bezel for fine mortaring with 0.7 mm trimless bezel thickness for perfect plastering (recessed version); special perforated steel panel maximises heat dispersal outwards (recessed version); vertical slide for moving the luminaire outwards (recessed version); grub screw for locking the adjustment (recessed version); mechanical/electrical connector with m/f connectors (channel version); up to 10 units can be connected in line with a single power supply (channel version); articulated boom for orienting the fixture (for coves, false ceiling and surround versions); available as pre-assembled KIT version with 2, 3 and 4 fixtures for channel, surface and trimless mounting. Anti-yellowing epoxy powder coating, stabilised against UV rays. Product available with the following finishes: matt embossed white 12, matt embossed black 31. Passive heat dissipation via optimised fixture casing construction, which uses the heat conductivity of the metal and convective currents. Available with LED ON/OFF driver, DIMM 1-10V, PHASE CUTTING and DALI 220/240V VAC 50/60 Hz. Electronic driver for LED lamps, electronic power supply for metal halide lamps. Driver/power supply included in package. Isolation class II and III. IP20. The product can be equipped with: cross grille, no-glare honeycomb grille and UV, IR, dichroic and selective filters for food applications. Emergency unit (3 hour) available as accessory equipment. Fixture built in compliance with Standard EN 60598-1 and amendments and EC Directives 2006/95/CE (low voltage), 2004/108/CE (EMC), 2009/125/CE (Ecodesign), 2002/96/CE (RAEE), 2011/65/CE (RoHS).


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Tracks/channels





Code 0.25402.0012 - Recessed channel

Finishing: Embossed matt white (Standard)
 Length: 2400mm Width: 41mm Height: 58mm
 Description: l. mm 2400




Code 0.25402.0031 - Recessed channel

Finishing: Embossed matt black (Standard)
 Length: 2400mm Width: 41mm Height: 58mm
 Description: l. mm 2400





Code 0.25811.0012 - Recessed channel

Finishing: Embossed matt white (Standard)
 Length: 2300mm Width: 41mm Height: 52mm
 Description: l. mm 2300





Code 0.25811.0031 - Recessed channel

Finishing: Embossed matt black (Standard)
 Length: 2300mm Width: 41mm Height: 52mm
 Description: l. mm 2300



Code 0.25401.0012 - Surface and suspension channel

Finishing: Embossed matt white (Standard)
 Length: 2400mm Width: 41mm Height: 56.5mm
 Description: l. mm 2400mm





Code 0.25401.0031 - Surface and suspension channel

Finishing: Embossed matt black (Standard)
 Length: 2400mm Width: 41mm Height: 56.5mm
 Description: l. mm 2400mm



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Tracks/channels



Code 0.25801.0012 - Surface and suspension channel


Finishing: Embossed matt white (Standard)
Length: 2300mm Width: 41mm Height: 56.5mm
Description: l. mm 2300mm



Code 0.25801.0031 - Surface and suspension channel


Finishing: Embossed matt black (Standard)
Length: 2300mm Width: 41mm Height: 56.5mm
Description: l. mm 2300mm

Accessories




Code 0.26400.004A - Red glass filter 1 mm

Type: Optical
Finishing: Red




Code 0.26400.005A - Green glass filter 1 mm

Type: Optical
Finishing: Green




Code 0.26400.006A - Blue glass filter 1 mm

Type: Optical
Finishing: Blue




Code 0.26400.007A - Pink glass filter 1 mm

Type: Optical
Finishing: Pink



Code 0.26400.008A - Yellow glass filter 1 mm

Type: Optical
Finishing: Yellow




Code 0.25435.0012 - Emergency Pack

Type: Electrical
Finishing: Embossed matt white (Standard)
Description:

3W LED / Emergency mode only / Automatic operation / High temperature Ni-Cd batteries / Charge indicator with led bi-color / Protection device against extensive discharge / Conformity with current standards: EN61347-2-13, EN61347-2-7, EN61547, EN55015, EN60598-2-22, EN61000-3-2, SELV.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).


Accessories



Code 0.25435.0031 - Emergency Pack



Type: Electrical
 Finishing: Embossed matt black (Standard)
 Description:

3W LED / Emergency mode only / Automatic operation / High temperature Ni-Cd batteries / Charge indicator with led bi-color / Protection device against extensive discharge / Conformity with current standards: EN61347-2-13, EN61347-2-7, EN61547, EN55015, EN60598-2-22, EN61000-3-2, SELV.





Code 0.26408.0000 - Colored Gel Slides (2 pieces)

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26416.0000 - Selective filter 2700K - 2500K

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26424.0000 - Selective filter 2700K - 2200K

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26432.0000 - Selective filter 2700K - 2000K

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26440.0000 - Honeycomb dense texture

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).


Accessories



Code 0.26448.0000 - Honeycomb wide texture

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26456.0000 - Ribbed glass

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26460.0000 - Opal lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26476.0000 - Cross blade louver

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26484.0000 - Barn doors

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26556.0012 - Short snoot

Type: Optical



Finishing: Embossed matt white (Standard)

Accessories





Code 0.26556.0031 - Short snoot

Type: Optical
Finishing: Embossed matt black (Standard)




Code 0.26557.0000 - Selective filter 3000K-2700K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26565.0000 - Selective filter 3000K-3600K


Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26573.0000 - Selective filter 3000K-4000K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Indoor | Modular systems | Yori Channel

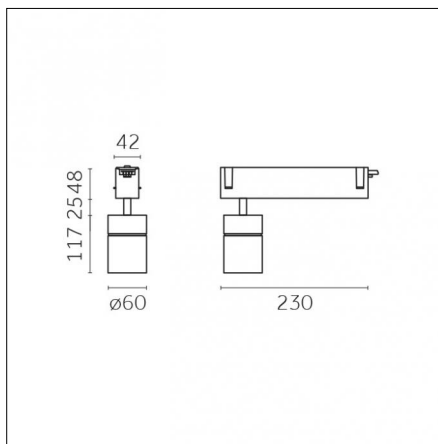

Narrow 12°

12

IP20



Risk 1

850°



Code 0.GM12B.HC12

Light source features

Number of light sources: 1

Source type: LED HC

Watt: 9W

Lm: 960lm

Lm/W: 107lm/W

Kelvin/CRI: 3000K / >98

SDCM/L90 B10: < 2 / 50000

Fixture total output: 787 lm

Fixture efficacy: 76 lm/W

Imax: 12440 cd

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off

Isolation class: Class I

Optical features

Beam angle: 12°

Optical type, adjustability: Adjustable

Interchangeable optic (IOS): YES

Physical features

Material: Die-cast aluminium

Fixing: Ceiling

Adjustability: 356° horizontal axis 90° vertical axis

Finishing: Embossed matt white (Standard)

Weight: 0.65Kg



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net

Photometries

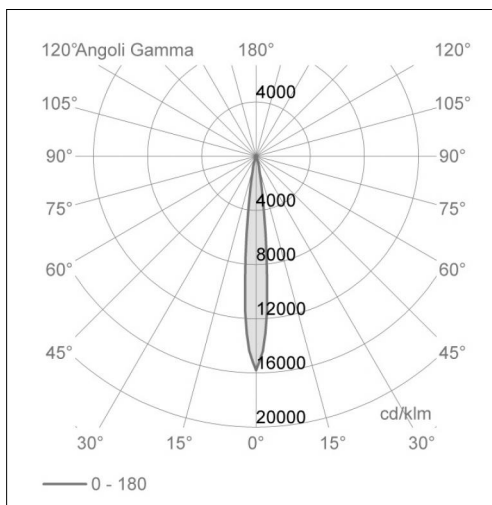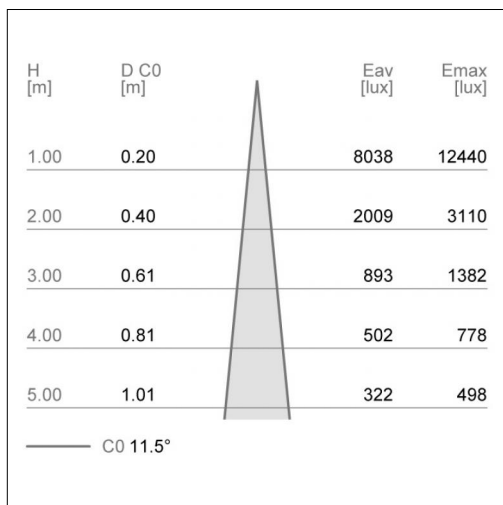



0_GM12B_HC_12.ies

Specifications text

YORI
Track, channel, recessed and surface mounting fixture. Symmetrical output. Available for LED and metal halide lamps. Die-cast aluminium body. Interchangeable IOS Ø 50mm (LL1) and Ø 80mm (LL2) reflectors in polycarbonate stabilised up to 140° with highly reflective metal coating - exclusive anti-scratch treatment with surface vitrification for LED lamps. Interchangeable IOS Ø 80mm reflectors in 99.99% pure aluminium, with bayonet fitting for metal halide lamps. Anti-static polycarbonate protective screen with a high transmission index (97%); transparent for very narrow light beams, satin for narrow, medium and wide beams and satin/prismatic for the Mira version; anti-yellowing, stabilised against UV rays, resistant to 850° incandescent wire test, self-extinguishing V0; tempered protective glass for IOS reflectors for metal halide lamps Spot adjustable 0° to 90° vertically and 356° horizontally; integrated plastic no-glare screen; recessed optics for improved visual comfort; mounts to false ceilings with the innovative ClikFix one-way spring system (for recessed, semi-recessed and surface mounted versions); drilled bezel for fine mortaring with 0.7 mm trimless bezel thickness for perfect plastering (recessed version); special perforated steel panel maximises heat dispersal outwards (recessed version); vertical slide for moving the luminaire outwards (recessed version); grub screw for locking the adjustment (recessed version); mechanical/electrical connector with m/f connectors (channel version); up to 10 units can be connected in line with a single power supply (channel version); articulated boom for orienting the fixture (for coves, false ceiling and surround versions); available as pre-assembled KIT version with 2, 3 and 4 fixtures for channel, surface and trimless mounting. Anti-yellowing epoxy powder coating, stabilised against UV rays. Product available with the following finishes: matt embossed white 12, matt embossed black 31. Passive heat dissipation via optimised fixture casing construction, which uses the heat conductivity of the metal and convective currents. Available with LED ON/OFF driver, DIMM 1-10V, PHASE CUTTING and DALI 220/240V VAC 50/60 Hz. Electronic driver for LED lamps, electronic power supply for metal halide lamps. Driver/power supply included in package. Isolation class II and III. IP20. The product can be equipped with: cross grille, no-glare honeycomb grille and UV, IR, dichroic and selective filters for food applications. Emergency unit (3 hour) available as accessory equipment. Fixture built in compliance with Standard EN 60598-1 and amendments and EC Directives 2006/95/CE (low voltage), 2004/108/CE (EMC), 2009/125/CE (Ecodesign), 2002/96/CE (RAEE), 2011/65/CE (RoHS).


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Tracks/channels





Code 0.25402.0012 - Recessed channel

Finishing: Embossed matt white (Standard)
 Length: 2400mm Width: 41mm Height: 58mm
 Description: l. mm 2400




Code 0.25402.0031 - Recessed channel

Finishing: Embossed matt black (Standard)
 Length: 2400mm Width: 41mm Height: 58mm
 Description: l. mm 2400





Code 0.25811.0012 - Recessed channel

Finishing: Embossed matt white (Standard)
 Length: 2300mm Width: 41mm Height: 52mm
 Description: l. mm 2300





Code 0.25811.0031 - Recessed channel

Finishing: Embossed matt black (Standard)
 Length: 2300mm Width: 41mm Height: 52mm
 Description: l. mm 2300



Code 0.25401.0012 - Surface and suspension channel

Finishing: Embossed matt white (Standard)
 Length: 2400mm Width: 41mm Height: 56.5mm
 Description: l. mm 2400mm





Code 0.25401.0031 - Surface and suspension channel

Finishing: Embossed matt black (Standard)
 Length: 2400mm Width: 41mm Height: 56.5mm
 Description: l. mm 2400mm



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Tracks/channels



Code 0.25801.0012 - Surface and suspension channel


Finishing: Embossed matt white (Standard)
Length: 2300mm Width: 41mm Height: 56.5mm
Description: l. mm 2300mm



Code 0.25801.0031 - Surface and suspension channel

Finishing: Embossed matt black (Standard)
Length: 2300mm Width: 41mm Height: 56.5mm
Description: l. mm 2300mm

Optics




Code 0.35125.0000 - Ø60mm precision optic 12° - LED

Finishing:
Description:



Narrow 12°




Code 0.35126.0000 - Ø60mm precision optic 20° - LED

Finishing:
Description:



Medium 20°




Code 0.35127.0000 - Ø60mm precision optic 32° - LED

Finishing:
Description:




Wide 32°

Accessories




Code 0.26402.004A - Red glass filter 1 mm

Type: Optical
Finishing: Red




Code 0.26402.005A - Green glass filter 1 mm

Type: Optical
Finishing: Green




Code 0.26402.006A - Blue glass filter 1 mm

Type: Optical
Finishing: Blue




Code 0.26402.007A - Pink glass filter 1 mm

Type: Optical
Finishing: Pink



Code 0.26402.008A - Yellow glass filter 1 mm


Type: Optical
Finishing: Yellow



Code 0.26402.009A - Orange glass filter 1 mm

Type: Optical
Finishing: Orange


Accessories



Code 0.25435.0012 - Emergency Pack

Type: Electrical
 Finishing: Embossed matt white (Standard)
 Description:


3W LED / Emergency mode only / Automatic operation / High temperature Ni-Cd batteries / Charge indicator with led bi-color / Protection device against extensive discharge / Conformity with current standards: EN61347-2-13, EN61347-2-7, EN61547, EN55015, EN60598-2-22, EN61000-3-2, SELV.



Code 0.25435.0031 - Emergency Pack


Type: Electrical
 Finishing: Embossed matt black (Standard)
 Description:

3W LED / Emergency mode only / Automatic operation / High temperature Ni-Cd batteries / Charge indicator with led bi-color / Protection device against extensive discharge / Conformity with current standards: EN61347-2-13, EN61347-2-7, EN61547, EN55015, EN60598-2-22, EN61000-3-2, SELV.





Code 0.26410.0000 - Colored Gel Slides (2 pieces)

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26418.0000 - Selective filter 2700K - 2500K

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26426.0000 - Selective filter 2700K - 2200K

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26434.0000 - Selective filter 2700K - 2000K

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Accessories



Code 0.26442.0000 - Honeycomb dense texture

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26450.0000 - Honeycomb wide texture

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26457.0000 - Ribbed glass

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26462.0000 - Opal lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26470.0000 - Diffusive lens

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26477.0000 - Cross blade louver

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Accessories



Code 0.26485.0000 - Barn doors

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26489.0012 - Cone 45 ° wall washer

Type: Optical


Finishing: Embossed matt white (Standard)



Code 0.26489.0031 - Cone 45 ° wall washer

Type: Optical



Finishing: Embossed matt black (Standard)



Code 0.26559.0000 - Selective filter 3000K-2700K

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26567.0000 - Selective filter 3000K-3600K

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26575.0000 - Selective filter 3000K-4000K

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Accessories



Code 0.26650.0021 - Framing accessory, light shape - round


Type: Optical
Finishing: Black (Standard)



Code 0.26651.0021 - Framing accessory, light shape - square

Type: Optical
Finishing: Black (Standard)

Indoor | Modular systems | Yori Channel

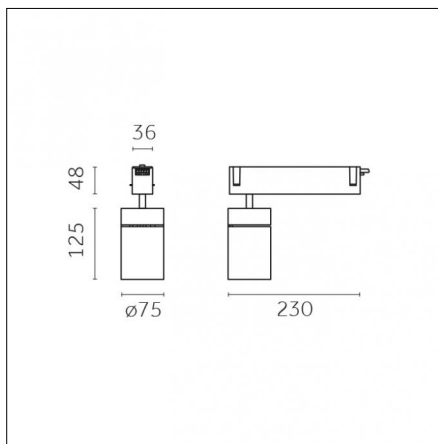

Narrow 12°

12

IP20



Risk 1

850°



Code 0.LM13B.HC12

Light source features

Number of light sources: 1

Source type: LED HC

Watt: 12W

Lm: 1323lm

Lm/W: 110lm/W

Kelvin/CRI: 3000K / >98

SDCM/L90 B10: < 2 / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off

Isolation class: Class I

Optical features

Beam angle: 12°

Optical type, adjustability: Adjustable

Interchangeable optic (IOS): YES

Physical features

Material: Die-cast aluminium

Fixing: Ceiling

Adjustability: 356° horizontal axis 90° vertical axis

Finishing: Embossed matt white (Standard)

Weight: 0.95Kg

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net

Photometries





Specifications text

YORI

Track, channel, recessed and surface mounting fixture. Symmetrical output. Available for LED and metal halide lamps. Die-cast aluminium body. Interchangeable IOS Ø 50mm (LL1) and Ø 80mm (LL2) reflectors in polycarbonate stabilised up to 140° with highly reflective metal coating - exclusive anti-scratch treatment with surface vitrification for LED lamps. Interchangeable IOS Ø 80mm reflectors in 99.99% pure aluminium, with bayonet fitting for metal halide lamps. Anti-static polycarbonate protective screen with a high transmission index (97%); transparent for very narrow light beams, satin for narrow, medium and wide beams and satin/prismatic for the Mira version; anti-yellowing, stabilised against UV rays, resistant to 850° incandescent wire test, self-extinguishing V0; tempered protective glass for IOS reflectors for metal halide lamps Spot adjustable 0° to 90° vertically and 356° horizontally; integrated plastic no-glare screen; recessed optics for improved visual comfort; mounts to false ceilings with the innovative KlikFix one-way spring system (for recessed, semi-recessed and surface mounted versions); drilled bezel for fine mortaring with 0.7 mm trimless bezel thickness for perfect plastering (recessed version); special perforated steel panel maximises heat dispersal outwards (recessed version); vertical slide for moving the luminaire outwards (recessed version); grub screw for locking the adjustment (recessed version); mechanical/electrical connector with m/f connectors (channel version); up to 10 units can be connected in line with a single power supply (channel version); articulated boom for orienting the fixture (for coves, false ceiling and surround versions); available as pre-assembled KIT version with 2, 3 and 4 fixtures for channel, surface and trimless mounting. Anti-yellowing epoxy powder coating, stabilised against UV rays. Product available with the following finishes: matt embossed white 12, matt embossed black 31. Passive heat dissipation via optimised fixture casing construction, which uses the heat conductivity of the metal and convective currents. Available with LED ON/OFF driver, DIMM 1-10V, PHASE CUTTING and DALI 220/240V VAC 50/60 Hz. Electronic driver for LED lamps, electronic power supply for metal halide lamps. Driver/power supply included in package. Isolation class II and III. IP20. The product can be equipped with: cross grille, no-glare honeycomb grille and UV, IR, dichroic and selective filters for food applications. Emergency unit (3 hour) available as accessory equipment. Fixture built in compliance with Standard EN 60598-1 and amendments and EC Directives 2006/95/CE (low voltage), 2004/108/CE (EMC), 2009/125/CE (Ecodesign), 2002/96/CE (RAEE), 2011/65/CE (RoHS).



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Tracks/channels





Code 0.25402.0012 - Recessed channel

Finishing: Embossed matt white (Standard)
 Length: 2400mm Width: 41mm Height: 58mm
 Description: l. mm 2400





Code 0.25402.0031 - Recessed channel

Finishing: Embossed matt black (Standard)
 Length: 2400mm Width: 41mm Height: 58mm
 Description: l. mm 2400





Code 0.25811.0012 - Recessed channel

Finishing: Embossed matt white (Standard)
 Length: 2300mm Width: 41mm Height: 52mm
 Description: l. mm 2300





Code 0.25811.0031 - Recessed channel

Finishing: Embossed matt black (Standard)
 Length: 2300mm Width: 41mm Height: 52mm
 Description: l. mm 2300



Code 0.25401.0012 - Surface and suspension channel

Finishing: Embossed matt white (Standard)
 Length: 2400mm Width: 41mm Height: 56.5mm
 Description: l. mm 2400mm





Code 0.25401.0031 - Surface and suspension channel

Finishing: Embossed matt black (Standard)
 Length: 2400mm Width: 41mm Height: 56.5mm
 Description: l. mm 2400mm



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Tracks/channels



Code 0.25801.0012 - Surface and suspension channel


Finishing: Embossed matt white (Standard)
Length: 2300mm Width: 41mm Height: 56.5mm
Description: l. mm 2300mm



Code 0.25801.0031 - Surface and suspension channel

Finishing: Embossed matt black (Standard)
Length: 2300mm Width: 41mm Height: 56.5mm
Description: l. mm 2300mm

Optics




Code 0.35130.0000 - Ø75mm precision optic 12° - LED

Finishing:
Description:



Narrow 12°




Code 0.35131.0000 - Ø75mm precision optic 23° - LED

Finishing:
Description:




Medium 23°

Accessories




Code 0.26404.004A - Red glass filter 1 mm

Type: Optical
Finishing: Red




Code 0.26404.005A - Green glass filter 1 mm

Type: Optical
Finishing: Green




Code 0.26404.006A - Blue glass filter 1 mm

Type: Optical
Finishing: Blue




Code 0.26404.007A - Pink glass filter 1 mm

Type: Optical
Finishing: Pink



Code 0.26404.008A - Yellow glass filter 1 mm


Type: Optical
Finishing: Yellow



Code 0.26404.009A - Orange glass filter 1 mm

Type: Optical
Finishing: Orange


Accessories



Code 0.25435.0012 - Emergency Pack

Type: Electrical
 Finishing: Embossed matt white (Standard)
 Description:


3W LED / Emergency mode only / Automatic operation / High temperature Ni-Cd batteries / Charge indicator with led bi-color / Protection device against extensive discharge / Conformity with current standards: EN61347-2-13, EN61347-2-7, EN61547, EN55015, EN60598-2-22, EN61000-3-2, SELV.



Code 0.25435.0031 - Emergency Pack


Type: Electrical
 Finishing: Embossed matt black (Standard)
 Description:

3W LED / Emergency mode only / Automatic operation / High temperature Ni-Cd batteries / Charge indicator with led bi-color / Protection device against extensive discharge / Conformity with current standards: EN61347-2-13, EN61347-2-7, EN61547, EN55015, EN60598-2-22, EN61000-3-2, SELV.





Code 0.26412.0000 - Colored Gel Slides (2 pieces)

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26420.0000 - Selective filter 2700K - 2500K

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26428.0000 - Selective filter 2700K - 2200K

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26436.0000 - Selective filter 2700K - 2000K

Type: Optical
 Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Accessories



Code 0.26444.0000 - Honeycomb dense texture

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26452.0000 - Honeycomb wide texture

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26458.0000 - Ribbed glass

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26464.0000 - Opal lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26472.0000 - Diffusive lens

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26478.0000 - Cross blade louvre

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net

Accessories



Code 0.26486.0000 - Barn doors

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)





Code 0.26490.0012 - Cone 45 ° wall washer

Type: Optical
Finishing: Embossed matt white (Standard)





Code 0.26490.0031 - Cone 45 ° wall washer

Type: Optical
Finishing: Embossed matt black (Standard)




Code 0.26561.0000 - Selective filter 3000K-2700K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26569.0000 - Selective filter 3000K-3600K


Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26577.0000 - Selective filter 3000K-4000K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Indoor | Modular systems | Yori Channel

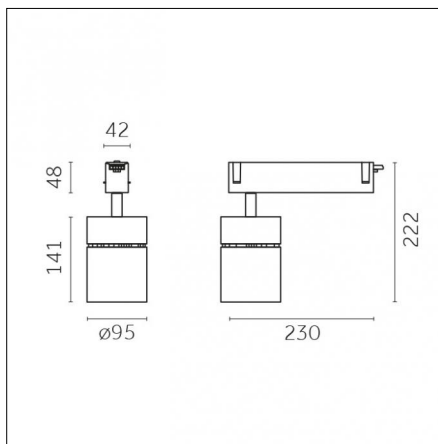

Narrow 12°

12

IP20



Risk 1

850°



Code 0.NM13B.HC12

Light source features

Number of light sources: 1

Source type: LED HC

Watt: 12W

Lm: 1323lm

Lm/W: 110lm/W

Kelvin/CRI: 3000K / >98

SDCM/L90 B10: < 2 / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off

Isolation class: Class I

Optical features

Beam angle: 12°

Optical type, adjustability: Adjustable

Interchangeable optic (IOS): YES

Physical features

Material: Die-cast aluminium

Fixing: Ceiling

Adjustability: 356° horizontal axis 90° vertical axis

Finishing: Embossed matt white (Standard)

Weight: 1.3Kg

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net

Photometries





Specifications text

YORI

Track, channel, recessed and surface mounting fixture. Symmetrical output. Available for LED and metal halide lamps. Die-cast aluminium body. Interchangeable IOS Ø 50mm (LL1) and Ø 80mm (LL2) reflectors in polycarbonate stabilised up to 140° with highly reflective metal coating - exclusive anti-scratch treatment with surface vitrification for LED lamps. Interchangeable IOS Ø 80mm reflectors in 99.99% pure aluminium, with bayonet fitting for metal halide lamps. Anti-static polycarbonate protective screen with a high transmission index (97%); transparent for very narrow light beams, satin for narrow, medium and wide beams and satin/prismatic for the Mira version; anti-yellowing, stabilised against UV rays, resistant to 850° incandescent wire test, self-extinguishing V0; tempered protective glass for IOS reflectors for metal halide lamps Spot adjustable 0° to 90° vertically and 356° horizontally; integrated plastic no-glare screen; recessed optics for improved visual comfort; mounts to false ceilings with the innovative KlikFix one-way spring system (for recessed, semi-recessed and surface mounted versions); drilled bezel for fine mortaring with 0.7 mm trimless bezel thickness for perfect plastering (recessed version); special perforated steel panel maximises heat dispersal outwards (recessed version); vertical slide for moving the luminaire outwards (recessed version); grub screw for locking the adjustment (recessed version); mechanical/electrical connector with m/f connectors (channel version); up to 10 units can be connected in line with a single power supply (channel version); articulated boom for orienting the fixture (for coves, false ceiling and surround versions); available as pre-assembled KIT version with 2, 3 and 4 fixtures for channel, surface and trimless mounting. Anti-yellowing epoxy powder coating, stabilised against UV rays. Product available with the following finishes: matt embossed white 12, matt embossed black 31. Passive heat dissipation via optimised fixture casing construction, which uses the heat conductivity of the metal and convective currents. Available with LED ON/OFF driver, DIMM 1-10V, PHASE CUTTING and DALI 220/240V VAC 50/60 Hz. Electronic driver for LED lamps, electronic power supply for metal halide lamps. Driver/power supply included in package. Isolation class II and III. IP20. The product can be equipped with: cross grille, no-glare honeycomb grille and UV, IR, dichroic and selective filters for food applications. Emergency unit (3 hour) available as accessory equipment. Fixture built in compliance with Standard EN 60598-1 and amendments and EC Directives 2006/95/CE (low voltage), 2004/108/CE (EMC), 2009/125/CE (Ecodesign), 2002/96/CE (RAEE), 2011/65/CE (RoHS).



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Tracks/channels





Code 0.25402.0012 - Recessed channel

Finishing: Embossed matt white (Standard)
 Length: 2400mm Width: 41mm Height: 58mm
 Description: l. mm 2400





Code 0.25402.0031 - Recessed channel

Finishing: Embossed matt black (Standard)
 Length: 2400mm Width: 41mm Height: 58mm
 Description: l. mm 2400





Code 0.25811.0012 - Recessed channel

Finishing: Embossed matt white (Standard)
 Length: 2300mm Width: 41mm Height: 52mm
 Description: l. mm 2300





Code 0.25811.0031 - Recessed channel

Finishing: Embossed matt black (Standard)
 Length: 2300mm Width: 41mm Height: 52mm
 Description: l. mm 2300



Code 0.25401.0012 - Surface and suspension channel

Finishing: Embossed matt white (Standard)
 Length: 2400mm Width: 41mm Height: 56.5mm
 Description: l. mm 2400mm





Code 0.25401.0031 - Surface and suspension channel

Finishing: Embossed matt black (Standard)
 Length: 2400mm Width: 41mm Height: 56.5mm
 Description: l. mm 2400mm



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Tracks/channels



Code 0.25801.0012 - Surface and suspension channel


Finishing: Embossed matt white (Standard)
Length: 2300mm Width: 41mm Height: 56.5mm
Description: l. mm 2300mm



Code 0.25801.0031 - Surface and suspension channel

Finishing: Embossed matt black (Standard)
Length: 2300mm Width: 41mm Height: 56.5mm
Description: l. mm 2300mm


Optics



Code 0.35037.0000 - LL7 - Very wide beam (53°) - LED

Finishing:
Description:


Wide Wide



Code 0.35038.0000 - LL7 - Very wide beam (53°) - LED

Finishing:
Description:

Very wide Very wide




Code 0.35135.0000 - Ø95mm precision optic 12° - LED

Finishing:
Description:



Narrow 12°




Code 0.35136.0000 - Ø95mm precision optic 24° - LED

Finishing:
Description:




Medium 24°

Accessories




Code 0.26406.004A - Red glass filter 1 mm

Type: Optical
Finishing: Red




Code 0.26406.005A - Green glass filter 1 mm

Type: Optical
Finishing: Green




Code 0.26406.006A - Blue glass filter 1 mm

Type: Optical
Finishing: Blue




Code 0.26406.007A - Pink glass filter 1 mm

Type: Optical
Finishing: Pink



Code 0.26406.008A - Yellow glass filter 1 mm

Type: Optical
Finishing: Yellow



Code 0.26406.009A - Orange glass filter 1 mm

Type: Optical
Finishing: Orange



Accessories



Code 0.26414.0000 - Colored Gel Slides (2 pieces)

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26422.0000 - Selective filter 2700K - 2500K

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26430.0000 - Selective filter 2700K - 2200K

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26438.0000 - Selective filter 2700K - 2000K

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26446.0000 - Honeycomb dense texture

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26454.0000 - Honeycomb wide texture

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Accessories




Code 0.26459.0000 - Ribbed glass

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26466.0000 - Opal lens

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26474.0000 - Diffusive lens

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26479.0000 - Cross blade louvre

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26487.0000 - Barn doors

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26491.0012 - Cone 45 ° wall washer



Type: Optical
Finishing: Embossed matt white (Standard)

Accessories





Code 0.26491.0031 - Cone 45 ° wall washer

Type: Optical
Finishing: Embossed matt black (Standard)




Code 0.26563.0000 - Selective filter 3000K-2700K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26571.0000 - Selective filter 3000K-3600K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26579.0000 - Selective filter 3000K-4000K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)