


Indoor | Ceiling mounted luminaires | Yori surface Ø22mm

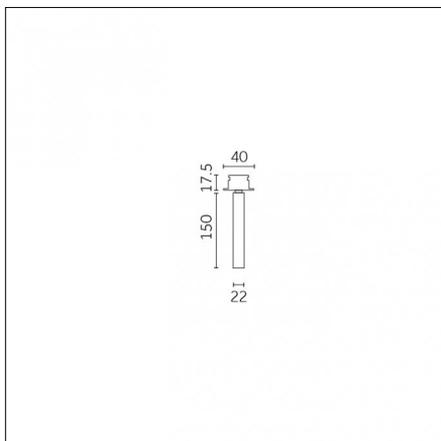

Very narrow 9°

01

IP20



850°

850°



NO



Code X.BH50B.HQ01 (Previous product code X.WF70B.HQ01)

Light source features

Number of light sources: 1

Source type: LED HQ

Watt: 2W

Lm: 145lm

Lm/W: 73lm/W

Kelvin/CRI: 3000K / >90

SDCM/L90 B10: < 3 / 50000

Electrical features

Driver included: NO

Driver type: no driver included

Isolation class: Class III

Optical features

Beam angle: 9°

Optical type, adjustability: Adjustable

Interchangeable optic (IOS): NO

Physical features

Material: Die-cast aluminium

Mounting: Surface mounted

Finishing: Chrome

Weight: 0.1Kg

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione


Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net

Photometries




Driver




Code 0.30041.0000 - Driver

Type: On-Off
 Watt: W - AC Input: 100-240Vac - mA:700mA
 Description: Connection options:
 Mood XS: 1-18pz
 Mood S PRO - M: 1-4pz
 For more information download the dedicated driver board




Code 0.30420.0000 - Driver

Type: On-Off
 Watt: W - AC Input: 198-264Vac 170-280Vdc - mA:700mA
 Description: Connection options:
 Mood XS: 1-5pz
 Mood S PRO - M: 1pz
 Mood L: 1pz
 For more information download the dedicated driver board




Code D.30420.0000 - Driver

Type: DALI
 Watt: W - AC Input: 99-264Vac 176-264Vdc - mA:700mA
 Description: Connection options:
 Mood XS: 1-5pz
 Mood S PRO - M: 1pz
 Mood L: 1pz
 For more information download the dedicated driver board




Code D.30421.0000 - Driver

Type: DALI
 Watt: W - AC Input: 120-277Vac 120-250Vdc - mA:700mA
 Description: Connection options:
 Mood XS: 1-17pz
 Mood S PRO - M: 1-4pz
 For more information download the dedicated driver board



Code T.30420.0000 - Driver Mood


Type: PHASE CUT
 Watt: W - AC Input: 230-240Vac - mA:700mA
 Description: Connection options:
 Mood XS: 1-5pz
 Mood S PRO - M: 1pz
 For more information download the dedicated driver board



Code T.30421.0000 - Driver

Type: PHASE CUT
 Watt: W - AC Input: 198-264Vac 176-264Vdc - mA:700mA
 Description: Connection options:
 Mood XS: 1-13pz
 Mood S PRO - M: 1-3pz
 Mood L: 1pz
 For more information download the dedicated driver board

Driver



Code V.30420.0000 - Driver

Type: DIMM 1-10V

Watt: W - AC Input: 99-264Vac 170-280Vdc - mA:700mA


Description: Connection options:

Mood XS: 1-5pz

Mood S PRO - M: 1pz

Mood L: 1pz

For more information download the dedicated driver board



Code V.30421.0000 - Driver

Type: DIMM 1-10V

Watt: W - AC Input: 99-264Vac 170-280Vdc - mA:700mA

Description: Connection options:

Mood XS: 1-17pz

Mood S PRO - M: 1-4pz

For more information download the dedicated driver board

Indoor | Ceiling mounted luminaires | Yori surface Ø22mm

Accessories



Code 0.26101.0000 - Wireless bluetooth controller

Type: Electrical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Length: 36mm Width: 50mm Height: 23mm

Description: 220-240V, 50-60Hz 0,6A

Class II - IP20 - Compatible with DALI drivers


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net

Indoor | Ceiling mounted luminaires | Yori surface Ø22mm

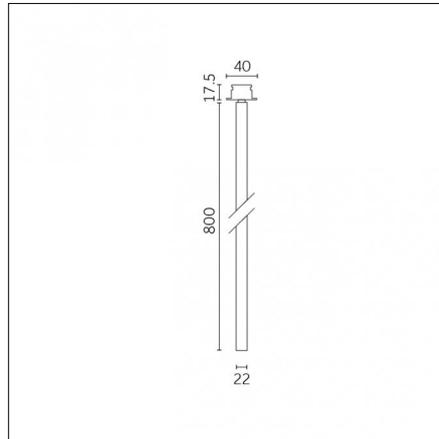

Very narrow 9°

01

IP20



850°

850°



Code X.CH50B.HQ01 (Previous product code X.ZF70B.HQ01)

Light source features

Number of light sources: 1

Source type: LED HQ

Watt: 2W

Lm: 145lm

Lm/W: 73lm/W

Kelvin/CRI: 3000K / >90

SDCM/L90 B10: < 3 / 50000

Electrical features

Driver included: NO

Driver type: no driver included

Isolation class: Class III

Optical features

Beam angle: 9°

Optical type, adjustability: Adjustable

Interchangeable optic (IOS): NO

Physical features

Material: Die-cast aluminium

Mounting: Surface mounted

Finishing: Chrome

Weight: 0.6Kg

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione


Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net

Photometries




Driver




Code 0.30041.0000 - Driver

Type: On-Off
 Watt: W - AC Input: 100-240Vac - mA:700mA
 Description: Connection options:
 Mood XS: 1-18pz
 Mood S PRO - M: 1-4pz
 For more information download the dedicated driver board




Code 0.30420.0000 - Driver

Type: On-Off
 Watt: W - AC Input: 198-264Vac 170-280Vdc - mA:700mA
 Description: Connection options:
 Mood XS: 1-5pz
 Mood S PRO - M: 1pz
 Mood L: 1pz
 For more information download the dedicated driver board




Code D.30420.0000 - Driver

Type: DALI
 Watt: W - AC Input: 99-264Vac 176-264Vdc - mA:700mA
 Description: Connection options:
 Mood XS: 1-5pz
 Mood S PRO - M: 1pz
 Mood L: 1pz
 For more information download the dedicated driver board




Code D.30421.0000 - Driver

Type: DALI
 Watt: W - AC Input: 120-277Vac 120-250Vdc - mA:700mA
 Description: Connection options:
 Mood XS: 1-17pz
 Mood S PRO - M: 1-4pz
 For more information download the dedicated driver board



Code T.30420.0000 - Driver Mood


Type: PHASE CUT
 Watt: W - AC Input: 230-240Vac - mA:700mA
 Description: Connection options:
 Mood XS: 1-5pz
 Mood S PRO - M: 1pz
 For more information download the dedicated driver board



Code T.30421.0000 - Driver

Type: PHASE CUT
 Watt: W - AC Input: 198-264Vac 176-264Vdc - mA:700mA
 Description: Connection options:
 Mood XS: 1-13pz
 Mood S PRO - M: 1-3pz
 Mood L: 1pz
 For more information download the dedicated driver board

Driver



Code V.30420.0000 - Driver

Type: DIMM 1-10V

Watt: W - AC Input: 99-264Vac 170-280Vdc - mA:700mA


Description: Connection options:

Mood XS: 1-5pz

Mood S PRO - M: 1pz

Mood L: 1pz

For more information download the dedicated driver board



Code V.30421.0000 - Driver

Type: DIMM 1-10V

Watt: W - AC Input: 99-264Vac 170-280Vdc - mA:700mA

Description: Connection options:

Mood XS: 1-17pz

Mood S PRO - M: 1-4pz

For more information download the dedicated driver board

Indoor | Ceiling mounted luminaires | Yori surface Ø22mm

Accessories



Code 0.26101.0000 - Wireless bluetooth controller

Type: Electrical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Length: 36mm Width: 50mm Height: 23mm

Description: 220-240V, 50-60Hz 0,6A

Class II - IP20 - Compatible with DALI drivers


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net

Indoor | Ceiling mounted luminaires | Yori surface Ø22mm

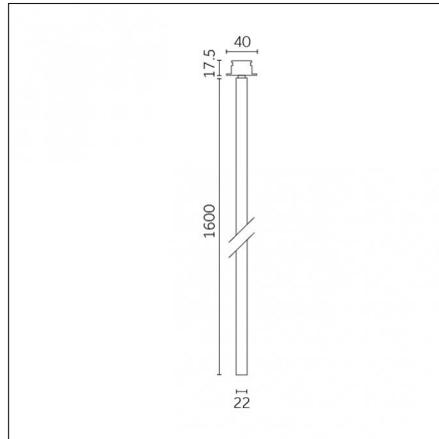

Very narrow 9°

12

IP20



850°

850°



Code X.DH50B.HQ12 (Previous product code X.VF70B.HQ12)

Light source features

Number of light sources: 1

Source type: LED HQ

Watt: 2W

Lm: 145lm

Lm/W: 73lm/W

Kelvin/CRI: 3000K / >90

SDCM/L90 B10: < 3 / 50000

Electrical features

Driver included: NO

Driver type: no driver included

Isolation class: Class III

Optical features

Beam angle: 9°

Optical type, adjustability: Adjustable

Interchangeable optic (IOS): NO

Physical features

Material: Die-cast aluminium

Mounting: Surface mounted

Finishing: Embossed matt white (Standard)

Weight: 1.2Kg

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione


Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net

Photometries




Driver




Code 0.30041.0000 - Driver

Type: On-Off
 Watt: W - AC Input: 100-240Vac - mA:700mA
 Description: Connection options:
 Mood XS: 1-18pz
 Mood S PRO - M: 1-4pz
 For more information download the dedicated driver board




Code 0.30420.0000 - Driver

Type: On-Off
 Watt: W - AC Input: 198-264Vac 170-280Vdc - mA:700mA
 Description: Connection options:
 Mood XS: 1-5pz
 Mood S PRO - M: 1pz
 Mood L: 1pz
 For more information download the dedicated driver board




Code D.30420.0000 - Driver

Type: DALI
 Watt: W - AC Input: 99-264Vac 176-264Vdc - mA:700mA
 Description: Connection options:
 Mood XS: 1-5pz
 Mood S PRO - M: 1pz
 Mood L: 1pz
 For more information download the dedicated driver board




Code D.30421.0000 - Driver

Type: DALI
 Watt: W - AC Input: 120-277Vac 120-250Vdc - mA:700mA
 Description: Connection options:
 Mood XS: 1-17pz
 Mood S PRO - M: 1-4pz
 For more information download the dedicated driver board



Code T.30420.0000 - Driver Mood


Type: PHASE CUT
 Watt: W - AC Input: 230-240Vac - mA:700mA
 Description: Connection options:
 Mood XS: 1-5pz
 Mood S PRO - M: 1pz
 For more information download the dedicated driver board



Code T.30421.0000 - Driver

Type: PHASE CUT
 Watt: W - AC Input: 198-264Vac 176-264Vdc - mA:700mA
 Description: Connection options:
 Mood XS: 1-13pz
 Mood S PRO - M: 1-3pz
 Mood L: 1pz
 For more information download the dedicated driver board

Driver



Code V.30420.0000 - Driver

Type: DIMM 1-10V

Watt: W - AC Input: 99-264Vac 170-280Vdc - mA:700mA


Description: Connection options:

Mood XS: 1-5pz

Mood S PRO - M: 1pz

Mood L: 1pz

For more information download the dedicated driver board



Code V.30421.0000 - Driver

Type: DIMM 1-10V

Watt: W - AC Input: 99-264Vac 170-280Vdc - mA:700mA

Description: Connection options:

Mood XS: 1-17pz

Mood S PRO - M: 1-4pz

For more information download the dedicated driver board

Indoor | Ceiling mounted luminaires | Yori surface Ø22mm

Accessories



Code 0.26101.0000 - Wireless bluetooth controller

Type: Electrical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Length: 36mm Width: 50mm Height: 23mm

Description: 220-240V, 50-60Hz 0,6A

Class II - IP20 - Compatible with DALI drivers



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net

Indoor | Pendants | Yori pendant Ø35mm

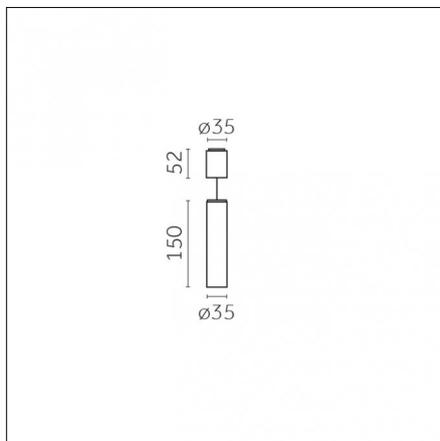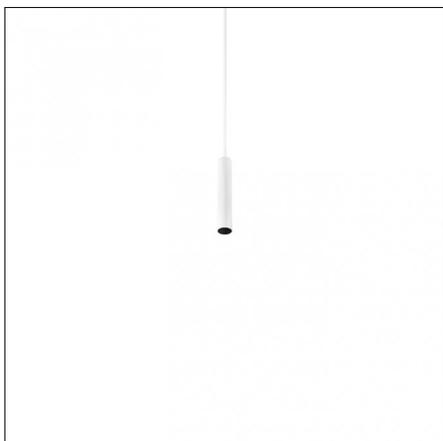

Very narrow 8°



IP20



Risk 1

850°



Code 0.PH51B.HQC0 (Previous product code 0.FF70A.HQC0)

Light source features

Number of light sources: 1

Source type: LED HQ

Watt: 3.5W

Lm: 315lm

Lm/W: 90lm/W

Kelvin/CRI: 3000K / >90

SDCM/L80 B10: < 3 / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off 220/240 Vac 50/60 Hz

Isolation class: Class I

Optical features

Beam angle: 8°

Optical type, adjustability: Fixed

Interchangeable optic (IOS): NO

Physical features

Material: Die-cast aluminium

Mounting: Suspension

Finishing: Royal matt white

Weight: 0.16Kg

Notes:

Cable length 3m

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net


Photometries



35mm - H 150mm_IES.zip


35mm - H 150mm_LDT.zip

Accessories




Code 0.25470.0012 - Mounting accessory - semi recessed

Finishing: Embossed matt white (Standard)




Code 0.25470.0031 - Mounting accessory - semi recessed

Finishing: Embossed matt black (Standard)





Code 0.25471.0012 - Mounting accessory - track adapter

Finishing: Embossed matt white (Standard)





Code 0.25471.0031 - Mounting accessory - track adapter

Finishing: Embossed matt black (Standard)



Code 0.25473.0012 - Mounting accessory - trimless


Finishing: Embossed matt white (Standard)



Code 0.25473.0031 - Mounting accessory - trimless


Finishing: Embossed matt black (Standard)

Accessories




Code 0.26042.0000 - Cylinder, Full version

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)
Height: 35mm
Description: Full version



Code 0.26043.0000 - Cylinder, Full version

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)
Height: 70mm
Description: Full version



Code 0.26044.0000 - Cylinder, Hollow version



Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)
Height: 35mm
Description: Hollow version



Code 0.26045.0000 - Cylinder, Hollow version

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)
Height: 70mm
Description: Hollow version

Indoor | Pendants | Yori pendant Ø35mm

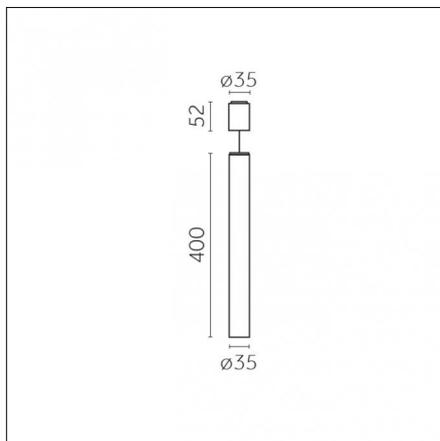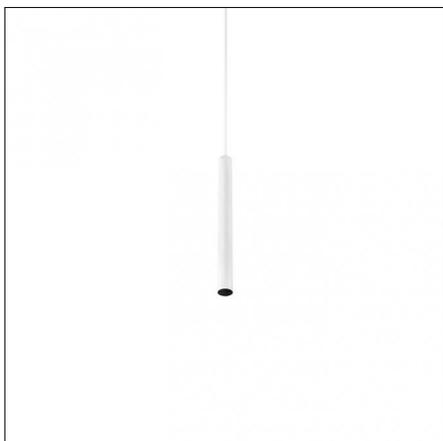

Very narrow 8°

01

IP20



Risk 1

850°



Code 0.QH51B.HQ01 (Previous product code 0.GF70A.HQ01)

Light source features

Number of light sources: 1

Source type: LED HQ

Watt: 3.5W

Lm: 315lm

Lm/W: 90lm/W

Kelvin/CRI: 3000K / >90

SDCM/L80 B10: < 3 / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off 220/240 Vac 50/60 Hz

Isolation class: Class I

Optical features

Beam angle: 8°

Optical type, adjustability: Fixed

Interchangeable optic (IOS): NO

Physical features

Material: Die-cast aluminium

Mounting: Suspension

Finishing: Chrome

Weight: 0.5Kg

Notes:

Cable length 3m

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net


Photometries



35mm - H 400mm_IES.zip


35mm - H 400mm_LDT.zip

Accessories




Code 0.25470.0012 - Mounting accessory - semi recessed

Finishing: Embossed matt white (Standard)




Code 0.25470.0031 - Mounting accessory - semi recessed

Finishing: Embossed matt black (Standard)





Code 0.25471.0012 - Mounting accessory - track adapter

Finishing: Embossed matt white (Standard)





Code 0.25471.0031 - Mounting accessory - track adapter

Finishing: Embossed matt black (Standard)



Code 0.25473.0012 - Mounting accessory - trimless

Finishing: Embossed matt white (Standard)




Code 0.25473.0031 - Mounting accessory - trimless

Finishing: Embossed matt black (Standard)


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Accessories




Code 0.26042.0000 - Cylinder, Full version

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)
Height: 35mm
Description: Full version



Code 0.26043.0000 - Cylinder, Full version

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)
Height: 70mm
Description: Full version



Code 0.26044.0000 - Cylinder, Hollow version



Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)
Height: 35mm
Description: Hollow version



Code 0.26045.0000 - Cylinder, Hollow version

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)
Height: 70mm
Description: Hollow version

Indoor | Pendants | Yori pendant Ø35mm

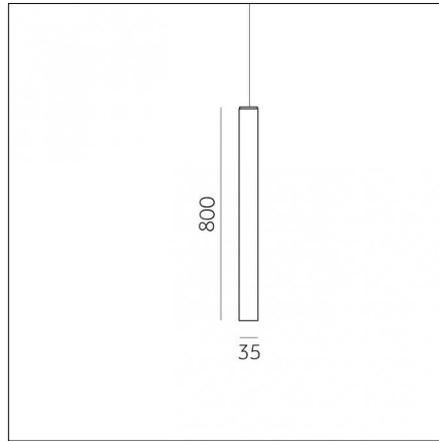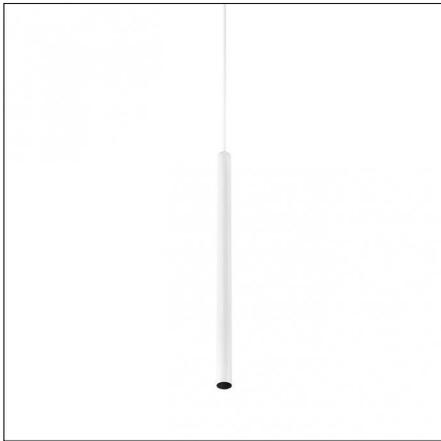

Very narrow 8°

01

IP20



Risk 1

850°



Code 0.TH51B.HQ01 (Previous product code 0.PF70A.HQ01)

Light source features

Number of light sources: 1

Source type: LED HQ

Watt: 3.5W

Lm: 315lm

Lm/W: 90lm/W

Kelvin/CRI: 3000K / >90

SDCM/L80 B10: < 3 / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off 220/240 Vac 50/60 Hz

Isolation class: Class I

Optical features

Beam angle: 8°

Optical type, adjustability: Fixed

Interchangeable optic (IOS): NO

Physical features

Material: Die-cast aluminium

Mounting: Suspension

Finishing: Chrome

Weight: 0.5Kg

Notes:

Cable length 3m

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net


Photometries



35mm - H 800mm_IES.zip


35mm - H 800mm_LDT.zip

Accessories




Code 0.25470.0012 - Mounting accessory - semi recessed

Finishing: Embossed matt white (Standard)




Code 0.25470.0031 - Mounting accessory - semi recessed

Finishing: Embossed matt black (Standard)





Code 0.25471.0012 - Mounting accessory - track adapter

Finishing: Embossed matt white (Standard)





Code 0.25471.0031 - Mounting accessory - track adapter

Finishing: Embossed matt black (Standard)



Code 0.25473.0012 - Mounting accessory - trimless


Finishing: Embossed matt white (Standard)



Code 0.25473.0031 - Mounting accessory - trimless


Finishing: Embossed matt black (Standard)

Accessories




Code 0.26042.0000 - Cylinder, Full version

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)
Height: 35mm
Description: Full version



Code 0.26043.0000 - Cylinder, Full version

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)
Height: 70mm
Description: Full version



Code 0.26044.0000 - Cylinder, Hollow version


Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)
Height: 35mm
Description: Hollow version



Code 0.26045.0000 - Cylinder, Hollow version

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)
Height: 70mm
Description: Hollow version

Indoor | Ceiling mounted luminaires | Yori surface Ø60mm

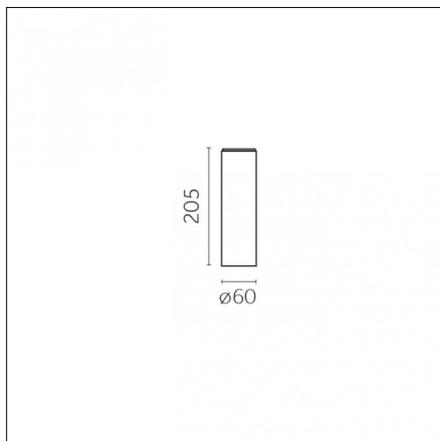

Narrow 12°

01

IP20



850°

850°



NO



Code 0.GH51B.HQ01 (Previous product code 0.CF71C.HQ01)

Light source features

Number of light sources: 1

Source type: LED HQ

Watt: 5W

Lm: 688lm

Lm/W: 138lm/W

Kelvin/CRI: 3000K / >90

SDCM/L80 B10: < 2 / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off

Isolation class: Class II

Optical features

Beam angle: 12°

Optical type, adjustability: Fixed

Interchangeable optic (IOS): YES

Physical features

Material: Die-cast aluminium

Mounting: Surface mounted

Finishing: Chrome

Weight: 0.54Kg

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione


Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net

Photometries



Optics




Code 0.35125.0000 - Ø60mm precision optic 12° - LED

Finishing:
Description:



Narrow 12°




Code 0.35126.0000 - Ø60mm precision optic 20° - LED

Finishing:
Description:



Medium 20°




Code 0.35127.0000 - Ø60mm precision optic 32° - LED

Finishing:
Description:




Wide 32°

Accessories




Code 0.26402.004A - Red glass filter 1 mm

Type: Optical
Finishing: Red




Code 0.26402.005A - Green glass filter 1 mm

Type: Optical
Finishing: Green




Code 0.26402.006A - Blue glass filter 1 mm

Type: Optical
Finishing: Blue




Code 0.26402.007A - Pink glass filter 1 mm

Type: Optical
Finishing: Pink



Code 0.26402.008A - Yellow glass filter 1 mm


Type: Optical
Finishing: Yellow



Code 0.26402.009A - Orange glass filter 1 mm


Type: Optical
Finishing: Orange

Accessories




Code 0.26046.0000 - Cylinder, Hollow version

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)
Height: 40mm
Description: Hollow version





Code 0.26410.0000 - Colored Gel Slides (2 pieces)

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26418.0000 - Selective filter 2700K - 2500K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26426.0000 - Selective filter 2700K - 2200K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26434.0000 - Selective filter 2700K - 2000K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26442.0000 - Honeycomb dense texture

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)


Accessories



Code 0.26450.0000 - Honeycomb wide texture

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26457.0000 - Ribbed glass

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26462.0000 - Opal lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26470.0000 - Diffusive lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26477.0000 - Cross blade louvre

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)





Code 0.26485.0000 - Barn doors

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)


Accessories



Code 0.26567.0000 - Selective filter 3000K-3600K

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26575.0000 - Selective filter 3000K-4000K

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Indoor | Ceiling mounted luminaires | Yori surface Ø60mm

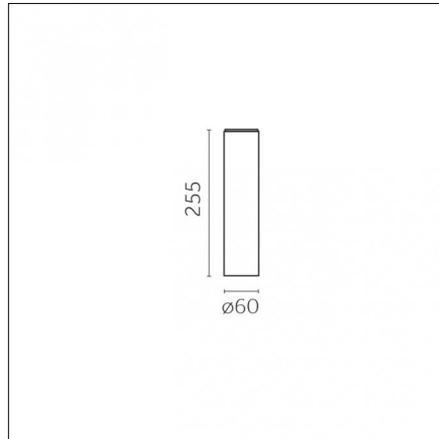

Narrow 12°

01

IP20



850°

850°



NO



Code 0.GH52B.DT01

Light source features

Number of light sources: 1

Source type: LED Warm Dimming DT

Watt: 6W

Lamp note: Dimming range: from 1700 K to 3000 K

Lumen: from 100 lm to 550 lm

Lm: 100lm

Kelvin/CRI: / >90

SDCM/L80 B10: < 4 / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off

Isolation class: Class II

Optical features

Beam angle: 12°

Optical type, adjustability: Fixed

Interchangeable optic (IOS): YES

Physical features

Material: Die-cast aluminium

Mounting: Surface mounted

Finishing: Chrome

Weight: 0.4Kg

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione


Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net

Photometries



Optics




Code 0.35125.0000 - Ø60mm precision optic 12° - LED

Finishing:
Description:



Narrow 12°




Code 0.35126.0000 - Ø60mm precision optic 20° - LED

Finishing:
Description:



Medium 20°




Code 0.35127.0000 - Ø60mm precision optic 32° - LED

Finishing:
Description:




Wide 32°

Accessories




Code 0.26402.004A - Red glass filter 1 mm

Type: Optical
Finishing: Red




Code 0.26402.005A - Green glass filter 1 mm

Type: Optical
Finishing: Green




Code 0.26402.006A - Blue glass filter 1 mm

Type: Optical
Finishing: Blue




Code 0.26402.007A - Pink glass filter 1 mm

Type: Optical
Finishing: Pink



Code 0.26402.008A - Yellow glass filter 1 mm


Type: Optical
Finishing: Yellow



Code 0.26402.009A - Orange glass filter 1 mm


Type: Optical
Finishing: Orange

Accessories




Code 0.26046.0000 - Cylinder, Hollow version

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)
Height: 40mm
Description: Hollow version





Code 0.26410.0000 - Colored Gel Slides (2 pieces)

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26418.0000 - Selective filter 2700K - 2500K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26426.0000 - Selective filter 2700K - 2200K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26434.0000 - Selective filter 2700K - 2000K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26442.0000 - Honeycomb dense texture

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Accessories



Code 0.26450.0000 - Honeycomb wide texture

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26457.0000 - Ribbed glass

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26462.0000 - Opal lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26470.0000 - Diffusive lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26477.0000 - Cross blade louvre

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)





Code 0.26485.0000 - Barn doors

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)


Accessories



Code 0.26567.0000 - Selective filter 3000K-3600K

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26575.0000 - Selective filter 3000K-4000K

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Indoor | Ceiling mounted luminaires | Yori surface Ø95mm

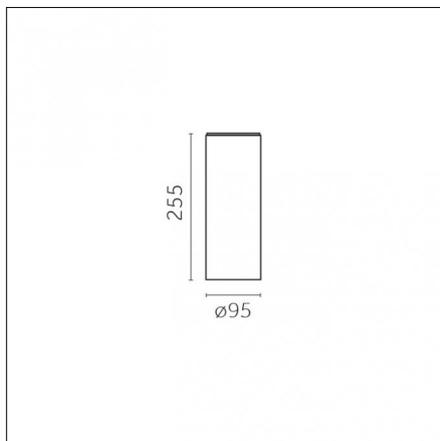

Narrow 12°

01

IP20



850°

850°



NO



Code 0.HH53B.HQ01 (Previous product code 0.DF73C.HQ01)

Light source features

Number of light sources: 1

Source type: LED HQ

Watt: 12W

Lm: 1533lm

Lm/W: 128lm/W

Kelvin/CRI: 3000K / >90

SDCM/L90 B10: < 2 / 50000

Fixture total output: 790 lm

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off

Isolation class: Class II

Optical features

Beam angle: 12°

Optical type, adjustability: Fixed

Interchangeable optic (IOS): YES

Physical features

Material: Die-cast aluminium

Mounting: Surface mounted

Finishing: Chrome

Weight: 1.25Kg


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net


Optics



Code 0.35037.0000 - LL7 - Very wide beam (53°) - LED

Finishing:
Description:


Wide Wide



Code 0.35038.0000 - LL7 - Very wide beam (53°) - LED

Finishing:
Description:

Very wide Very wide




Code 0.35135.0000 - Ø95mm precision optic 12° - LED

Finishing:
Description:



Narrow 12°




Code 0.35136.0000 - Ø95mm precision optic 24° - LED

Finishing:
Description:




Medium 24°

Accessories




Code 0.26406.004A - Red glass filter 1 mm

Type: Optical
Finishing: Red




Code 0.26406.005A - Green glass filter 1 mm

Type: Optical
Finishing: Green




Code 0.26406.006A - Blue glass filter 1 mm

Type: Optical
Finishing: Blue




Code 0.26406.007A - Pink glass filter 1 mm

Type: Optical
Finishing: Pink



Code 0.26406.008A - Yellow glass filter 1 mm


Type: Optical
Finishing: Yellow



Code 0.26406.009A - Orange glass filter 1 mm


Type: Optical
Finishing: Orange

Accessories





Code 0.26047.0000 - Cylinder, Hollow version

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)
Height: 60mm
Description: Hollow version





Code 0.26414.0000 - Colored Gel Slides (2 pieces)

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26422.0000 - Selective filter 2700K - 2500K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26430.0000 - Selective filter 2700K - 2200K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26438.0000 - Selective filter 2700K - 2000K


Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26446.0000 - Honeycomb dense texture

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Accessories



Code 0.26454.0000 - Honeycomb wide texture

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26459.0000 - Ribbed glass

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26466.0000 - Opal lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26474.0000 - Diffusive lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26479.0000 - Cross blade louver

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26487.0000 - Barn doors

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Accessories



Code 0.26563.0000 - Selective filter 3000K-2700K

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26571.0000 - Selective filter 3000K-3600K

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26579.0000 - Selective filter 3000K-4000K

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Indoor | Ceiling mounted luminaires | Yori surface Ø95mm

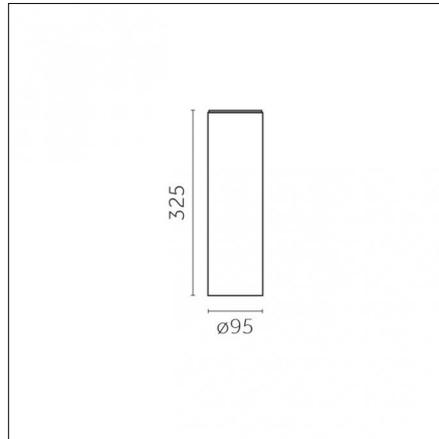

Narrow 12°

01 IP20  850°  NO    ENEC   CE

Code 0.HH54B.HQ01 (Previous product code 0.DF74C.HQ01)

Light source features

Number of light sources: 1

Source type: LED HQ

Watt: 17W

Lm: 2122lm

Lm/W: 125lm/W

Kelvin/CRI: 3000K / >90

SDCM/L90 B10: < 2 / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off

Isolation class: Class II

Optical features

Beam angle: 12°

Optical type, adjustability: Adjustable

Interchangeable optic (IOS): YES

Physical features

Material: Die-cast aluminium

Mounting: Surface mounted

Finishing: Chrome

Weight: 1.63Kg

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione


Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net

Photometries




Optics



Code 0.35037.0000 - LL7 - Very wide beam (53°) - LED

Finishing:
Description:


Wide Wide



Code 0.35038.0000 - LL7 - Very wide beam (53°) - LED

Finishing:
Description:

Very wide Very wide




Code 0.35135.0000 - Ø95mm precision optic 12° - LED

Finishing:
Description:



Narrow 12°




Code 0.35136.0000 - Ø95mm precision optic 24° - LED

Finishing:
Description:




Medium 24°

Accessories




Code 0.26406.004A - Red glass filter 1 mm

Type: Optical
Finishing: Red




Code 0.26406.005A - Green glass filter 1 mm

Type: Optical
Finishing: Green




Code 0.26406.006A - Blue glass filter 1 mm

Type: Optical
Finishing: Blue




Code 0.26406.007A - Pink glass filter 1 mm

Type: Optical
Finishing: Pink



Code 0.26406.008A - Yellow glass filter 1 mm


Type: Optical
Finishing: Yellow



Code 0.26406.009A - Orange glass filter 1 mm


Type: Optical
Finishing: Orange

Accessories





Code 0.26047.0000 - Cylinder, Hollow version

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)
Height: 60mm
Description: Hollow version





Code 0.26414.0000 - Colored Gel Slides (2 pieces)

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26422.0000 - Selective filter 2700K - 2500K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26430.0000 - Selective filter 2700K - 2200K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26438.0000 - Selective filter 2700K - 2000K


Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26446.0000 - Honeycomb dense texture

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)


Accessories



Code 0.26454.0000 - Honeycomb wide texture

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26459.0000 - Ribbed glass

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26466.0000 - Opal lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26474.0000 - Diffusive lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26479.0000 - Cross blade louver

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)





Code 0.26487.0000 - Barn doors

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Accessories



Code 0.26563.0000 - Selective filter 3000K-2700K

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26571.0000 - Selective filter 3000K-3600K

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26579.0000 - Selective filter 3000K-4000K

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Indoor | Ceiling mounted luminaires | Yori surface Ø95mm

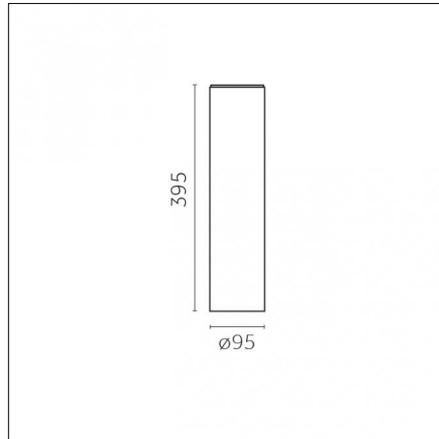

 Narrow 12°	01	IP20		850°	850°	 NO							
---	----	------	---	------	------	--	---	--	---	---	---	---	---

Code 0.HH56B.DT01

Light source features

Number of light sources: 1

Source type: LED Warm Dimming DT

Watt: 25W

Lamp note: Dimming range: from 1700 K to 3000 K Lumen: from 100 lm to 2500 lm

Kelvin/CRI: / >95

SDCM/L70 B10: < 4 / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off

Isolation class: Class II

Optical features

Beam angle: 12°

Optical type, adjustability: Adjustable

Interchangeable optic (IOS): YES

Physical features

Material: Die-cast aluminium

Mounting: Surface mounted

Finishing: Chrome

Weight: 2Kg

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione


Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net

Photometries




Optics



Code 0.35037.0000 - LL7 - Very wide beam (53°) - LED

Finishing:
Description:


Wide Wide



Code 0.35038.0000 - LL7 - Very wide beam (53°) - LED

Finishing:
Description:

Very wide Very wide




Code 0.35135.0000 - Ø95mm precision optic 12° - LED

Finishing:
Description:



Narrow 12°




Code 0.35136.0000 - Ø95mm precision optic 24° - LED

Finishing:
Description:




Medium 24°

Accessories




Code 0.26406.004A - Red glass filter 1 mm

Type: Optical
Finishing: Red




Code 0.26406.005A - Green glass filter 1 mm

Type: Optical
Finishing: Green




Code 0.26406.006A - Blue glass filter 1 mm

Type: Optical
Finishing: Blue




Code 0.26406.007A - Pink glass filter 1 mm

Type: Optical
Finishing: Pink



Code 0.26406.008A - Yellow glass filter 1 mm


Type: Optical
Finishing: Yellow



Code 0.26406.009A - Orange glass filter 1 mm


Type: Optical
Finishing: Orange

Accessories





Code 0.26047.0000 - Cylinder, Hollow version

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)
Height: 60mm
Description: Hollow version





Code 0.26414.0000 - Colored Gel Slides (2 pieces)

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26422.0000 - Selective filter 2700K - 2500K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




Code 0.26430.0000 - Selective filter 2700K - 2200K

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26438.0000 - Selective filter 2700K - 2000K


Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26446.0000 - Honeycomb dense texture

Type: Optical
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)


Accessories



Code 0.26454.0000 - Honeycomb wide texture

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26459.0000 - Ribbed glass

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26466.0000 - Opal lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26474.0000 - Diffusive lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26479.0000 - Cross blade louver

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)





Code 0.26487.0000 - Barn doors

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Accessories



Code 0.26563.0000 - Selective filter 3000K-2700K

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26571.0000 - Selective filter 3000K-3600K

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26579.0000 - Selective filter 3000K-4000K

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)