



—


Yori

Recessed

# Yori Recessed

**EN** Yori Recessed is available in the one-spot and two-spots recessed versions (with bezel or trimless); the projector body comes in two sizes and a range of wattages and light beams. The mechanical extraction and adjustment system of the optics facilitates flexible, precise adjustment that can meet the lighting requirements of different settings.


**IT** Yori Recessed è disponibile nelle versioni a incasso singolo e doppio con flangia visibile e trimless; il corpo del proiettore presenta due dimensioni e diverse opzioni di potenza e fascio luminoso. Il sistema meccanico di estrazione e orientamento dell'ottica permette un puntamento flessibile e preciso in grado di rispondere ai requisiti di illuminazione di ambienti diversi.

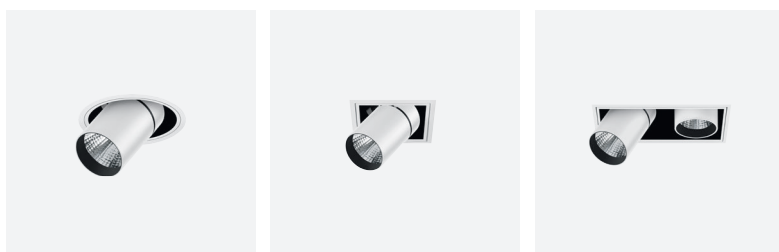

**EN** Round  
**IT** Tondo

**EN** Square  
**IT** Quadrato

**EN** Square Double  
**IT** Quadrato Doppio

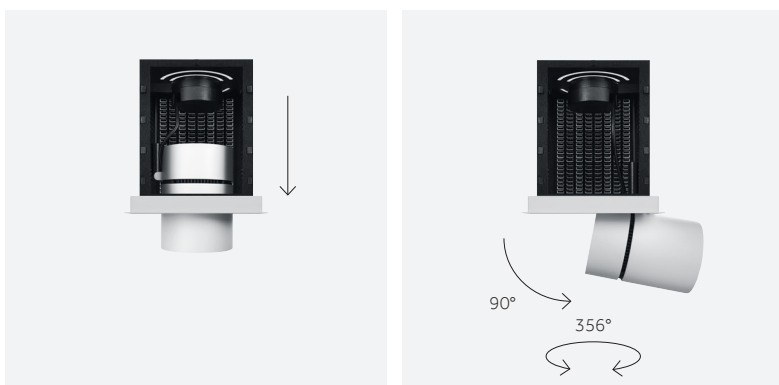

**EN** Vertical slide for the projector to move out smoothly  
**IT** Slitta verticale per l'escursione verso l'esterno del proiettore.


**EN** Adjustment up to 356° and tilting up to 90° with block system.  
**IT** Orientamento sino a 356° e inclinazione sino a 90°, con sistema di blocco.









Ø 60 mm | Precision



Visible trim/  
Con flangia

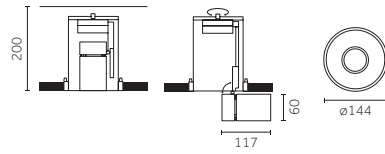

Trimless/  
Senza flangia

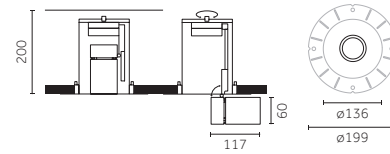

Code example:  
**X . TM52 A . HW 12**

Accessories: p.490  
Finishes: p.380  
Drivers: p.512-513  
Photometric data:  
www.reggiani.net

9W POWERLED		Lumen delivered up to 770lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	TM52 Visible trim	A 8° Very narrow	HW	2700	>90	725	<3	12
	UM52 Trimless		HQ	3000	>90	730	<3	31
			WW	3000	>80	845	<3	
			NN	4000	>80	940	<3	

LED nominal lumen

9W COBLED		Lumen delivered up to 1115lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	BM52 Visible trim	B 12° Narrow	HC	3000	>98	960	<2	12
	CM52 Trimless		HW	2700	>90	1050	<2	31
		E 20° Medium	HQ	3000	>90	1100	<2	
		K - Without optics	WW	3000	>80	1300	<3	
			NN	4000	>80	1360	<3	

LED nominal lumen


12W COBLED		Lumen delivered up to 1455lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	BM53 Visible trim	B 12° Narrow	HC	3000	>98	1250	<2	12
	CM53 Trimless		HW	2700	>90	1370	<2	31
		E 20° Medium	HQ	3000	>90	1420	<2	
		K - Without optics	WW	3000	>80	1700	<3	
			NN	4000	>80	1775	<3	

LED nominal lumen


12W Warm Dimming COBLED		Lumen delivered up to 690lm / Lumen maintenance: L70 B50=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	BM53 Visible trim	B 27° Medium	DT	1700-3000	>95	100-1000	<4	12
	CM53 Trimless							31

LED nominal lumen


# Ø 60 mm | Performance



Visible trim/  
Con flangia

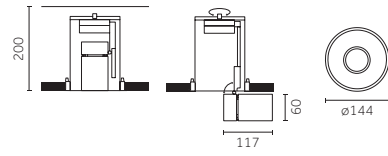

Trimless/  
Senza flangia

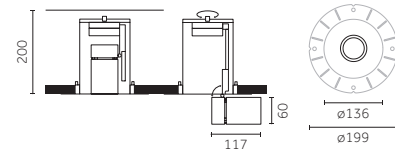

Code example:

X . **BM62** . B . **HW** . **12**

Accessories: p.491  
 Finishes: p.380  
 Drivers: p.512-513  
 Photometric data:  
 www.reggiani.net

## 9W COBLED

Lumen delivered up to 1200 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>BM62</b> Visible trim	<b>B</b> 13° Narrow	<b>HC</b>	3000	>98	960	<2	<b>12</b>
	<b>CM62</b> Trimless	<b>E</b> 24° Medium	<b>HW</b>	2700	>90	1050	<2	<b>31</b>
		<b>H</b> 40° Wide	<b>HQ</b>	3000	>90	1100	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	1300	<3	
			<b>NN</b>	4000	>80	1360	<3	

LED nominal lumen

## 12W COBLED

Lumen delivered up to 1560 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>BM63</b> Visible trim	<b>B</b> 13° Narrow	<b>HC</b>	3000	>98	1250	<2	<b>12</b>
	<b>CM63</b> Trimless	<b>E</b> 24° Medium	<b>HW</b>	2700	>90	1370	<2	<b>31</b>
		<b>H</b> 40° Wide	<b>HQ</b>	3000	>90	1420	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	1700	<3	
			<b>NN</b>	4000	>80	1775	<3	


LED nominal lumen





Ø 60 mm | Precision | Accessories

Interchangeable IOS optics/  
Ottiche intercambiabili IOS



**Description**  
Precision - Narrow beam/  
Precision - Fascio stretto  
(12°-9W, 12W)

**Code**  
0.35125.0000




**Description**  
Precision - Medium beam/  
Precision - Fascio medio  
(20°-9W, 12W)

**Code**  
0.35126.0000

Not for codes/Non per codici: **TM52A / UM52A / BM53B.DT / CM53B.DT**

Not for codes/Non per codici: **TM52A / UM52A / BM53B.DT / CM53B.DT**

Optics accessories/  
Accessori ottiche




**Description**  
Glass filter 1 mm  
Filtro vetro 1 mm/

**Code**  
0.26402.00


**Finishes**

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange




**Description**  
Dense texture honeycomb louvre/  
Griglia alveolare a maglia fitta

**Code**  
0.26442.0000




**Description**  
Wide texture honeycomb louvre/  
Griglia alveolare a maglia larga

**Code**  
0.26450.0000




**Description**  
Colored Gel Slides (2 pieces)/  
Vetrini per gel colorato (2 pezzi/)

**Code**  
0.26410.0000



**Description**  
Elliptical beam lens/  
Lente per fascio ellittico

**Code**  
0.26457.0000




**Description**  
Selective filter 3000K - 2700K/  
Filtro selettivo 3000K - 2700K

**Code**  
0.26559.0000




**Description**  
Opal lens/  
Lente opale

**Code**  
0.26462.0000




**Description**  
Selective filter 2700K - 2500K /  
Filtro selettivo 2700K - 2500K

**Code**  
0.26418.0000



**Description**  
Spread lens/  
Lente diffondente

**Code**  
0.26470.0000




**Description**  
Selective filter 2700K - 2200K/  
Filtro selettivo 2700K - 2200K

**Code**  
0.26426.0000




**Description**  
Cross blade louvre/  
Griglia a croce

**Code**  
0.26477.0000




**Description**  
Selective filter 2700K - 2000K /  
Filtro selettivo 2700K - 2000K

**Code**  
0.26434.0000




**Description**  
Barn doors/  
Alette rompiflusso

**Code**  
0.26485.0000



**Description**  
Selective filter 3000K - 3600K /  
Filtro selettivo 3000K - 3600K

**Code**  
0.26567.0000




**Description**  
Cone 45° wall washer/  
Cono 45° wall washer

**Code**  
0.26489.00

**Finishes**

12	White
31	Black









**Description**  
Selective filter 3000K - 4000K /  
Filtro selettivo 3000K - 4000K
























**Code**  
0.26575.0000

## Ø 60 mm | Performance | Accessories

### Interchangeable IOS optics/ Ottiche intercambiabili IOS


		<b>Description</b> Performance - Narrow beam/ Performance - Fascio stretto (13°-9W, 12W)	<b>Code</b> <b>0.35145.0000</b>			<b>Description</b> Performance - Wide beam/ Performance - Fascio largo (40°-9W, 12W)	<b>Code</b> <b>0.35147.0000</b>
		<b>Description</b> Performance - Medium beam/ Performance - Fascio medio (24°-9W, 12W)	<b>Code</b> <b>0.35146.0000</b>				

### Optics accessories/ Accessori ottiche


	<b>Description</b> Glass filter 1 mm Filtro vetro 1 mm/	<b>Code</b> <b>0.26403.00</b>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 		<b>Description</b> Selective filter 3000K - 4000K/ Filtro selettivo 3000K - 4000K	<b>Code</b> <b>0.26576.0000</b>	
	<b>Description</b> Colored Gel Slides (2 pieces)/ Vetri per gel colorato (2 pezzi/)	<b>Code</b> <b>0.26411.0000</b>			<b>Description</b> Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	<b>Code</b> <b>0.26443.0000</b>	
	<b>Description</b> Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K	<b>Code</b> <b>0.26560.0000</b>			<b>Description</b> Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	<b>Code</b> <b>0.26451.0000</b>	
	<b>Description</b> Selective filter 2700K - 2500K/ Filtro selettivo 2700K - 2500K	<b>Code</b> <b>0.26419.0000</b>			<b>Description</b> Elliptical beam lens/ Lente per fascio ellittico	<b>Code</b> <b>0.26493.0000</b>	
	<b>Description</b> Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K	<b>Code</b> <b>0.26427.0000</b>			<b>Description</b> Opal lens/ Lente opale	<b>Code</b> <b>0.26463.0000</b>	
	<b>Description</b> Selective filter 2700K - 2000K/ Filtro selettivo 2700K - 2000K	<b>Code</b> <b>0.26435.0000</b>			<b>Description</b> Spread lens/ Lente diffondente	<b>Code</b> <b>0.26471.0000</b>	
	<b>Description</b> Selective filter 3000K - 3600K/ Filtro selettivo 3000K - 3600K	<b>Code</b> <b>0.26568.0000</b>			<b>Description</b> Cross blade louvre/ Griglia a croce	<b>Code</b> <b>0.26481.0000</b>	
					<b>Description</b> Cone 45° wall washer/ Cono 45° wall washer	<b>Code</b> <b>0.26497.00</b>	<b>Finishes</b> 12  31 




Ø 95 mm | Precision



Visible trim/  
Con flangia

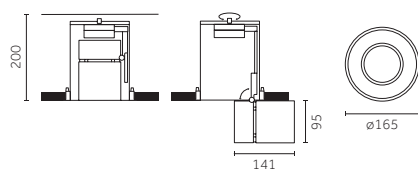

Trimless/  
Senza flangia

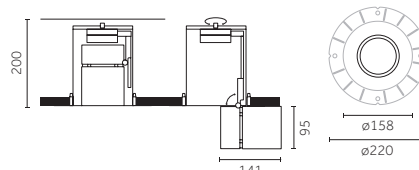

Code example:  
X . **DM53** B . **HC** **12**

Accessories: p.494  
Finishes: p.380  
Drivers: p.512-513  
Photometric data:  
www.reggiani.net

**12 W COB LED** Lumen delivered up to 1690lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>DM53</b> Visible trim	<b>B</b> 12° Narrow	<b>HC</b>	3000	>98	1323	<2	<b>12</b> <input type="checkbox"/>
	<b>FM53</b> Trimless	<b>E</b> 24° Medium	<b>HW</b>	2700	>90	1491	<2	<b>31</b> <input type="checkbox"/>
		<b>K</b> - Without optics	<b>HQ</b>	3000	>90	1533	<2	
			<b>WW</b>	3000	>80	1859	<3	
			<b>NN</b>	4000	>80	1920	<3	

LED nominal lumen

**17 W COB LED** Lumen delivered up to 1510lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>VM54</b> Visible trim	<b>A</b> 7° Very narrow	<b>HC</b>	3000	>98	1700	<2	<b>12</b> <input type="checkbox"/>
	<b>ZM54</b> Trimless		<b>HW</b>	2700	>90	1870	<2	<b>31</b> <input type="checkbox"/>
			<b>HQ</b>	3000	>90	1920	<2	
			<b>WW</b>	3000	>80	2320	<3	
			<b>NN</b>	4000	>80	2400	<3	

LED nominal lumen

**17 W COB LED** Lumen delivered up to 2350lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>DM54</b> Visible trim	<b>B</b> 12° Narrow	<b>HC</b>	3000	>98	1834	<2	<b>12</b> <input type="checkbox"/>
	<b>FM54</b> Trimless	<b>E</b> 24° Medium	<b>HW</b>	2700	>90	2067	<2	<b>31</b> <input type="checkbox"/>
		<b>K</b> - Without optics	<b>HQ</b>	3000	>90	2122	<2	
			<b>WW</b>	3000	>80	2582	<3	
			<b>NN</b>	4000	>80	2665	<3	

LED nominal lumen

**24 W COB LED** Lumen delivered up to 3170lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>DM56</b> Visible trim	<b>B</b> 12° Narrow	<b>HC</b>	3000	>98	2476	<2	<b>12</b> <input type="checkbox"/>
	<b>FM56</b> Trimless	<b>E</b> 24° Medium	<b>HW</b>	2700	>90	2792	<2	<b>31</b> <input type="checkbox"/>
		<b>K</b> - Without optics	<b>HQ</b>	3000	>90	2860	<2	
			<b>WW</b>	3000	>80	3487	<3	
			<b>NN</b>	4000	>80	3602	<3	

LED nominal lumen

**33 W COB LED** Lumen delivered up to 4080lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>DM58</b> Visible trim	<b>B</b> 12° Narrow	<b>HC</b>	3000	>98	3142	<2	<b>12</b> <input type="checkbox"/>
	<b>FM58</b> Trimless	<b>E</b> 24° Medium	<b>HW</b>	2700	>90	3635	<2	<b>31</b> <input type="checkbox"/>
		<b>K</b> - Without optics	<b>HQ</b>	3000	>90	3735	<2	
			<b>WW</b>	3000	>80	4510	<3	
			<b>NN</b>	4000	>80	4695	<3	

LED nominal lumen

**33 W Warm Dimming COB LED** Lumen delivered up to 1520lm / Lumen maintenance: L70 B50=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>DM58</b> Visible trim	<b>B</b> 25° Medium	<b>DT</b>	1700-3000	>95	100-3100	<4	<b>12</b> <input type="checkbox"/>
	<b>FM58</b> Trimless							<b>31</b> <input type="checkbox"/>

LED nominal lumen


# Ø 95 mm | Performance



Visible trim/  
Con flangia

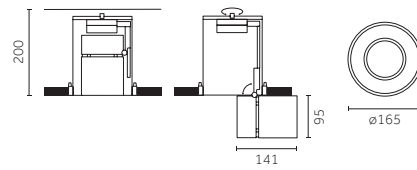

Trimless/  
Senza flangia

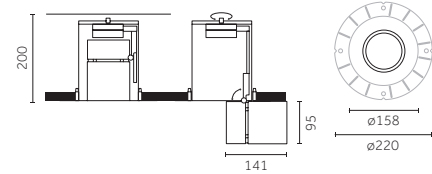

Code example:

X . **DM63** . B . **HC** . **12**

Accessories: p.495  
 Finishes: p.380  
 Drivers: p.512-513  
 Photometric data:  
 www.reggiani.net

## 12 W COBLED

Lumen delivered up to 1800 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>DM63</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	1323	<2	<b>12</b>
	<b>FM63</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	1491	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	1533	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	1859	<3	
			<b>NN</b>	4000	>80	1920	<3	

LED nominal lumen

## 17 W COBLED

Lumen delivered up to 2500 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>DM64</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	1834	<2	<b>12</b>
	<b>FM64</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	2067	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	2122	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	2582	<3	
			<b>NN</b>	4000	>80	2665	<3	

LED nominal lumen

## 24 W COBLED

Lumen delivered up to 3300 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>DM66</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	2476	<2	<b>12</b>
	<b>FM66</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	2792	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	2860	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	3487	<3	
			<b>NN</b>	4000	>80	3602	<3	

LED nominal lumen

## 33 W COBLED

Lumen delivered up to 4130 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>DM68</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	3142	<2	<b>12</b>
	<b>FM68</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	3635	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	3735	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	4510	<3	
			<b>NN</b>	4000	>80	4695	<3	

LED nominal lumen




## Ø 95 mm | Precision | Accessories

### Interchangeable IOS optics/ Ottiche intercambiabili IOS



**Description**  
Precision - Narrow beam /  
Precision - Fascio stretto  
(12°-12W, 17W, 24W, 33W)

**Code**  
**0.35135.0000**



**Description**  
Precision - Medium beam /  
Precision - Fascio medio  
(24°-12W, 17W, 24W, 33W)

**Code**  
**0.35136.0000**

Not for codes/Non per codici: VM54A / ZM54A / DM58B.DT / FM58B.DT

Not for codes/Non per codici: VM54A / ZM54A / DM58B.DT / FM58B.DT

### Optics accessories/ Accessori ottiche



**Description**  
Glass filter 1 mm  
Filtro vetro 1 mm/

**Code**  
**0.26406.00**


**Finishes**

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



**Description**  
Dense texture honeycomb louvre/  
Griglia alveolare a maglia fitta

**Code**  
**0.26446.0000**



**Description**  
Wide texture honeycomb louvre/  
Griglia alveolare a maglia larga

**Code**  
**0.26454.0000**



**Description**  
Colored Gel Slides (2 pieces)/  
Vetrini per gel colorato (2 pezzi/)

**Code**  
**0.26414.0000**



**Description**  
Elliptical beam lens/  
Lente per fascio ellittico

**Code**  
**0.26459.0000**



**Description**  
Selective filter 3000K - 2700K /  
Filtro selettivo 3000K - 2700K

**Code**  
**0.26563.0000**




**Description**  
Opal lens/  
Lente opale

**Code**  
**0.26466.0000**




**Description**  
Selective filter 2700K - 2500K /  
Filtro selettivo 2700K - 2500K

**Code**  
**0.26422.0000**



**Description**  
Spread lens/  
Lente diffondente

**Code**  
**0.26474.0000**




**Description**  
Selective filter 2700K - 2200K /  
Filtro selettivo 2700K - 2200K

**Code**  
**0.26430.0000**



**Description**  
Cross blade louvre/  
Griglia a croce

**Code**  
**0.26479.0000**



**Description**  
Selective filter 2700K - 2000K /  
Filtro selettivo 2700K - 2000K

**Code**  
**0.26438.0000**



**Description**  
Barn doors/  
Alette rompiflusso

**Code**  
**0.26487.0000**



**Description**  
Selective filter 3000K - 3600K /  
Filtro selettivo 3000K - 3600K

**Code**  
**0.26571.0000**



**Description**  
Cone 45° wall washer/  
Cono 45° wall washer

**Code**  
**0.26491.00**

**Finishes**

12	White
31	Black









**Description**  
Selective filter 3000K - 4000K /  
Filtro selettivo 3000K - 4000K
























**Code**  
**0.26579.0000**

Ø 95 mm | Performance | Accessories


Interchangeable IOS optics/  
Ottiche intercambiabili IOS

		<b>Description</b> Performance - Narrow beam/ Performance - Fascio stretto (10°-12W, 17W, 24W, 33W)	<b>Code</b> <u>0.35155.0000</u>			<b>Description</b> Performance - Wide beam/ Performance - Fascio largo (31°-12W, 17W, 24W, 33W)	<b>Code</b> <u>0.35157.0000</u>
		<b>Description</b> Performance - Medium beam/ Performance - Fascio medio (20°-12W, 17W, 24W, 33W)	<b>Code</b> <u>0.35156.0000</u>				


Optics accessories/  
Accessori ottiche

	<b>Description</b> Glass filter 1 mm Filtro vetro 1 mm/	<b>Code</b> <u>0.26407.00</u>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 		<b>Description</b> Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K	<b>Code</b> <u>0.26580.0000</u>	
	<b>Description</b> Colored Gel Slides (2 pieces) / Vetri per gel colorato (2 pezzi)/	<b>Code</b> <u>0.26415.0000</u>			<b>Description</b> Dense texture honeycomb louvre / Griglia alveolare a maglia fitta	<b>Code</b> <u>0.26447.0000</u>	
	<b>Description</b> Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K	<b>Code</b> <u>0.26564.0000</u>			<b>Description</b> Wide texture honeycomb louvre / Griglia alveolare a maglia larga	<b>Code</b> <u>0.26455.0000</u>	
	<b>Description</b> Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K	<b>Code</b> <u>0.26423.0000</u>			<b>Description</b> Elliptical beam lens / Lente per fascio ellittico	<b>Code</b> <u>0.26495.0000</u>	
	<b>Description</b> Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K	<b>Code</b> <u>0.26431.0000</u>			<b>Description</b> Opal lens / Lente opale	<b>Code</b> <u>0.26467.0000</u>	
	<b>Description</b> Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K	<b>Code</b> <u>0.26439.0000</u>			<b>Description</b> Spread lens / Lente diffondente	<b>Code</b> <u>0.26475.0000</u>	
	<b>Description</b> Selective filter 3000K - 3600K / Filtro selettivo 3000K - 3600K	<b>Code</b> <u>0.26572.0000</u>			<b>Description</b> Cross blade louvre / Griglia a croce	<b>Code</b> <u>0.26483.0000</u>	
					<b>Description</b> Cone 45° wall washer / Cono 45° wall washer	<b>Code</b> <u>0.26499.00</u>	<b>Finishes</b> 12  31 



Ø 60 mm | Precision



Visible trim/  
Con flangia

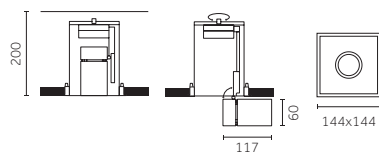

Trimless/  
Senza flangia

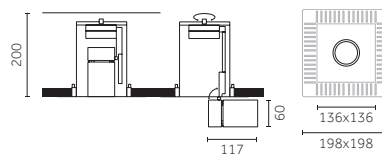

Code example:  
X . KM52 A . HW 12

Accessories: p.498  
Finishes: p.380  
Drivers: p.512-513  
Photometric data:  
www.reggiani.net

9W POWERLED		Lumen delivered up to 770lm / Lumen maintenance: L90 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	KM52 Visible trim	A 8° Very narrow	HW	2700	>90	725	<3	12
	XM52 Trimless		HQ	3000	>90	730	<3	31
			WW	3000	>80	845	<3	
			NN	4000	>80	940	<3	

LED nominal lumen

9W COBLED		Lumen delivered up to 1115lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM52 Visible trim	B 12° Narrow	HC	3000	>98	960	<2	12
	HM52 Trimless		HW	2700	>90	1050	<2	31
		E 20° Medium	HQ	3000	>90	1100	<2	
		K - Without optics	WW	3000	>80	1300	<3	
			NN	4000	>80	1360	<3	

LED nominal lumen


12W COBLED		Lumen delivered up to 1455lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM53 Visible trim	B 12° Narrow	HC	3000	>98	1250	<2	12
	HM53 Trimless		HW	2700	>90	1370	<2	31
		E 20° Medium	HQ	3000	>90	1420	<2	
		K - Without optics	WW	3000	>80	1700	<3	
			NN	4000	>80	1775	<3	

LED nominal lumen


12W Warm Dimming COBLED		Lumen delivered up to 690lm / Lumen maintenance: L70 B50=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM53 Visible trim	B 27° Medium	DT	1700-3000	>95	100-1000	<4	12
	HM53 Trimless							31

LED nominal lumen



# Ø 60 mm | Performance



Visible trim/  
Con flangia

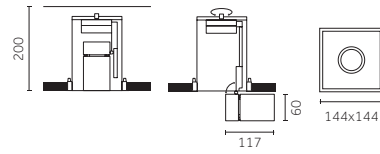

Trimless/  
Senza flangia

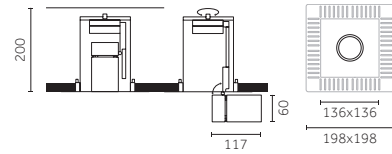

Code example:

X . **GM62** . B . **HC** . **12**

Accessories: p.499  
 Finishes: p.380  
 Drivers: p.512-513  
 Photometric data:  
 www.reggiani.net

## 9W COBLED

Lumen delivered up to 1200 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>GM62</b> Visible trim	<b>B</b> 13° Narrow	<b>HC</b>	3000	>98	960	<2	<b>12</b>
	<b>HM62</b> Trimless	<b>E</b> 24° Medium	<b>HW</b>	2700	>90	1050	<2	<b>31</b>
		<b>H</b> 40° Wide	<b>HQ</b>	3000	>90	1100	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	1300	<3	
			<b>NN</b>	4000	>80	1360	<3	

LED nominal lumen

## 12W COBLED

Lumen delivered up to 4560 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>GM63</b> Visible trim	<b>B</b> 13° Narrow	<b>HC</b>	3000	>98	1250	<2	<b>12</b>
	<b>HM63</b> Trimless	<b>E</b> 24° Medium	<b>HW</b>	2700	>90	1370	<2	<b>31</b>
		<b>H</b> 40° Wide	<b>HQ</b>	3000	>90	1420	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	1700	<3	
			<b>NN</b>	4000	>80	1775	<3	


LED nominal lumen






Ø 60 mm | Precision | Accessories

Interchangeable IOS optics/  
Ottiche intercambiabili IOS



**Description**  
Precision - Narrow beam/  
Precision - Fascio stretto  
(12°-9W, 12W)

**Code**  
0.35125.0000




**Description**  
Precision - Medium beam/  
Precision - Fascio medio  
(20°-9W, 12W)

**Code**  
0.35126.0000

Not for codes/Non per codici: KM52A / XM52A / GM53B.DT / HM53B.DT

Not for codes/Non per codici: KM52A / XM52A / GM53B.DT / HM53B.DT

Optics accessories/  
Accessori ottiche




**Description**  
Glass filter 1 mm  
Filtro vetro 1 mm/

**Code**  
0.26402.00


**Finishes**

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange




**Description**  
Dense texture honeycomb louvre/  
Griglia alveolare a maglia fitta

**Code**  
0.26442.0000




**Description**  
Wide texture honeycomb louvre/  
Griglia alveolare a maglia larga

**Code**  
0.26450.0000




**Description**  
Colored Gel Slides (2 pieces)/  
Vetrini per gel colorato (2 pezzi/)

**Code**  
0.26410.0000



**Description**  
Elliptical beam lens/  
Lente per fascio ellittico

**Code**  
0.26457.0000




**Description**  
Selective filter 3000K - 2700K /  
Filtro selettivo 3000K - 2700K

**Code**  
0.26559.0000




**Description**  
Opal lens/  
Lente opale

**Code**  
0.26462.0000




**Description**  
Selective filter 2700K - 2500K /  
Filtro selettivo 2700K - 2500K

**Code**  
0.26418.0000



**Description**  
Spread lens/  
Lente diffondente

**Code**  
0.26470.0000




**Description**  
Selective filter 2700K - 2200K /  
Filtro selettivo 2700K - 2200K

**Code**  
0.26426.0000




**Description**  
Cross blade louvre/  
Griglia a croce

**Code**  
0.26477.0000




**Description**  
Selective filter 2700K - 2000K /  
Filtro selettivo 2700K - 2000K

**Code**  
0.26434.0000




**Description**  
Barn doors/  
Alette rompiflusso

**Code**  
0.26485.0000



**Description**  
Selective filter 3000K - 3600K /  
Filtro selettivo 3000K - 3600K

**Code**  
0.26567.0000




**Description**  
Cone 45° wall washer/  
Cono 45° wall washer

**Code**  
0.26489.00

**Finishes**

12	White
31	Black









**Description**  
Selective filter 3000K - 4000K /  
Filtro selettivo 3000K - 4000K
























**Code**  
0.26575.0000

## Ø 60 mm | Performance | Accessories


### Interchangeable IOS optics/ Ottiche intercambiabili IOS

		<b>Description</b> Performance - Narrow beam/ Performance - Fascio stretto (13°-9W, 12W)	<b>Code</b> <b>0.35145.0000</b>			<b>Description</b> Performance - Wide beam/ Performance - Fascio largo (40°-9W, 12W)	<b>Code</b> <b>0.35147.0000</b>
		<b>Description</b> Performance - Medium beam/ Performance - Fascio medio (24°-9W, 12W)	<b>Code</b> <b>0.35146.0000</b>				


### Optics accessories/ Accessori ottiche

	<b>Description</b> Glass filter 1 mm Filtro vetro 1 mm/	<b>Code</b> <b>0.26403.00</b>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 		<b>Description</b> Selective filter 3000K - 4000K/ Filtro selettivo 3000K - 4000K	<b>Code</b> <b>0.26576.0000</b>	
	<b>Description</b> Colored Gel Slides (2 pieces)/ Vetri per gel colorato (2 pezzi)/	<b>Code</b> <b>0.26411.0000</b>			<b>Description</b> Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	<b>Code</b> <b>0.26443.0000</b>	
	<b>Description</b> Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K	<b>Code</b> <b>0.26560.0000</b>			<b>Description</b> Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	<b>Code</b> <b>0.26451.0000</b>	
	<b>Description</b> Selective filter 2700K - 2500K/ Filtro selettivo 2700K - 2500K	<b>Code</b> <b>0.26419.0000</b>			<b>Description</b> Elliptical beam lens/ Lente per fascio ellittico	<b>Code</b> <b>0.26493.0000</b>	
	<b>Description</b> Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K	<b>Code</b> <b>0.26427.0000</b>			<b>Description</b> Opal lens/ Lente opale	<b>Code</b> <b>0.26463.0000</b>	
	<b>Description</b> Selective filter 2700K - 2000K/ Filtro selettivo 2700K - 2000K	<b>Code</b> <b>0.26435.0000</b>			<b>Description</b> Spread lens/ Lente diffondente	<b>Code</b> <b>0.26471.0000</b>	
	<b>Description</b> Selective filter 3000K - 3600K/ Filtro selettivo 3000K - 3600K	<b>Code</b> <b>0.26568.0000</b>			<b>Description</b> Cross blade louvre/ Griglia a croce	<b>Code</b> <b>0.26481.0000</b>	
					<b>Description</b> Cone 45° wall washer/ Cono 45° wall washer	<b>Code</b> <b>0.26497.00</b>	<b>Finishes</b> 12  31 



Ø 95 mm | Precision



Visible trim/  
Con flangia

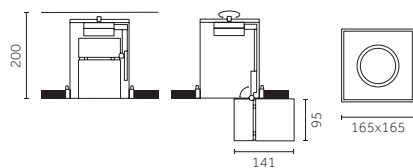

Visible trim/  
Con flangia

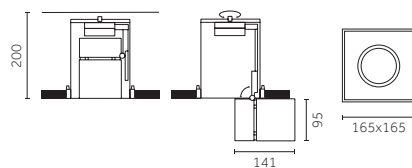

Code example:  
X . LM53 B . HC 12

Accessories: p.502  
Finishes: p.380  
Drivers: p.512-513  
Photometric data:  
www.reggiani.net

**12 W COB LED** Lumen delivered up to 1690 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM53 Visible trim	B 12° Narrow	HC	3000	>98	1323	<2	12
	MM53 Trimless	E 24° Medium	HW	2700	>90	1491	<2	31
		K - Without optics	HQ	3000	>90	1533	<2	
			WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen

**17 W COB LED** Lumen delivered up to 1510 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	WM54 Visible trim	A 7° Very narrow	HC	3000	>98	1700	<2	12
	YM54 Trimless		HW	2700	>90	1870	<2	31
			HQ	3000	>90	1920	<2	
			WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	

LED nominal lumen

**17 W COB LED** Lumen delivered up to 2350 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM54 Visible trim	B 12° Narrow	HC	3000	>98	1834	<2	12
	MM54 Trimless	E 24° Medium	HW	2700	>90	2067	<2	31
		K - Without optics	HQ	3000	>90	2122	<2	
			WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	

LED nominal lumen

**24 W COB LED** Lumen delivered up to 3170 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM56 Visible trim	B 12° Narrow	HC	3000	>98	2476	<2	12
	MM56 Trimless	E 24° Medium	HW	2700	>90	2792	<2	31
		K - Without optics	HQ	3000	>90	2860	<2	
			WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	

LED nominal lumen

**33 W COB LED** Lumen delivered up to 4080 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM58 Visible trim	B 12° Narrow	HC	3000	>98	3142	<2	12
	MM58 Trimless	E 24° Medium	HW	2700	>90	3635	<2	31
		K - Without optics	HQ	3000	>90	3735	<2	
			WW	3000	>80	4510	<3	
			NN	4000	>80	4695	<3	





LED nominal lumen

**33 W Warm Dimming COB LED** Lumen delivered up to 1520 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM58 Visible trim	B 25° Medium	DT	1700-3000	>95	100-3100	<4	12
	MM58 Trimless							31

LED nominal lumen

# Ø 95 mm | Performance

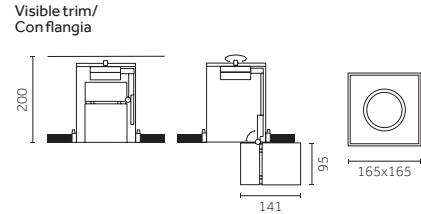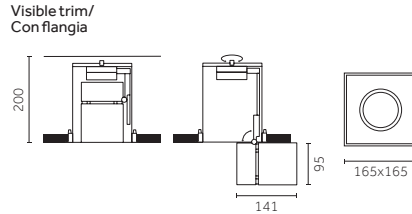

Code example:

X . **LM63** . B . **HC** . **12**

Accessories: p.503  
 Finishes: p.380  
 Drivers: p.512-513  
 Photometric data:  
 www.reggiani.net

**12 W COBLED** Lumen delivered up to 1800 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>LM63</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	1323	<2	<b>12</b>
	<b>MM63</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	1491	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	1533	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	1859	<3	
			<b>NN</b>	4000	>80	1920	<3	

LED nominal lumen

**17 W COBLED** Lumen delivered up to 2500 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>LM64</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	1834	<2	<b>12</b>
	<b>MM64</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	2067	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	2122	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	2582	<3	
			<b>NN</b>	4000	>80	2665	<3	

LED nominal lumen

**24 W COBLED** Lumen delivered up to 3300 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>LM66</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	2476	<2	<b>12</b>
	<b>MM66</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	2792	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	2860	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	3487	<3	
			<b>NN</b>	4000	>80	3602	<3	

LED nominal lumen

**33 W COBLED** Lumen delivered up to 4130 lm / Lumen maintenance: L80 B10=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>LM68</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	3142	<2	<b>12</b>
	<b>MM68</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	3635	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	3735	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	4510	<3	
			<b>NN</b>	4000	>80	4695	<3	

LED nominal lumen




## Ø 95 mm | Precision | Accessories

### Interchangeable IOS optics/ Ottiche intercambiabili IOS



**Description**  
Precision - Narrow beam /  
Precision - Fascio stretto  
(12°-12W, 17W, 24W, 33W)

**Code**  
0.35135.0000



**Description**  
Precision - Medium beam /  
Precision - Fascio medio  
(24°-12W, 17W, 24W, 33W)

**Code**  
0.35136.0000

Not for codes/Non per codici: WM54A / YM54A / LM58B.DT / MM58B.DT

Not for codes/Non per codici: WM54A / YM54A / LM58B.DT / MM58B.DT

### Optics accessories/ Accessori ottiche



**Description**  
Glass filter 1 mm  
Filtro vetro 1 mm/

**Code**  
0.26406.00


**Finishes**

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



**Description**  
Dense texture honeycomb louvre/  
Griglia alveolare a maglia fitta

**Code**  
0.26446.0000



**Description**  
Wide texture honeycomb louvre/  
Griglia alveolare a maglia larga

**Code**  
0.26454.0000



**Description**  
Colored Gel Slides (2 pieces)/  
Vetrini per gel colorato (2 pezzi/)

**Code**  
0.26414.0000



**Description**  
Elliptical beam lens/  
Lente per fascio ellittico

**Code**  
0.26459.0000



**Description**  
Selective filter 3000K - 2700K /  
Filtro selettivo 3000K - 2700K

**Code**  
0.26563.0000




**Description**  
Opal lens/  
Lente opale

**Code**  
0.26466.0000




**Description**  
Selective filter 2700K - 2500K /  
Filtro selettivo 2700K - 2500K

**Code**  
0.26422.0000



**Description**  
Spread lens/  
Lente diffondente

**Code**  
0.26474.0000




**Description**  
Selective filter 2700K - 2200K /  
Filtro selettivo 2700K - 2200K

**Code**  
0.26430.0000



**Description**  
Cross blade louvre/  
Griglia a croce

**Code**  
0.26479.0000



**Description**  
Selective filter 2700K - 2000K /  
Filtro selettivo 2700K - 2000K

**Code**  
0.26438.0000



**Description**  
Barn doors/  
Alette rompiflusso

**Code**  
0.26487.0000



**Description**  
Selective filter 3000K - 3600K /  
Filtro selettivo 3000K - 3600K

**Code**  
0.26571.0000



**Description**  
Cone 45° wall washer/  
Cono 45° wall washer

**Code**  
0.26491.00

**Finishes**

12	White
31	Black









**Description**  
Selective filter 3000K - 4000K /  
Filtro selettivo 3000K - 4000K
























**Code**  
0.26579.0000

## Ø 95 mm | Performance | Accessories


### Optics IOS/ Ottiche IOS

		<b>Description</b> Performance - Narrow beam (10°)/ Performance - Fascio stretto (10°) (10°-12W, 17W, 24W, 33W)	<b>Code</b> <b>0.35155.0000</b>			<b>Description</b> Performance - Wide beam (31°)/ Performance - Fascio largo (31°) (39°-12W, 17W, 24W, 33W)	<b>Code</b> <b>0.35157.0000</b>
		<b>Description</b> Performance - Medium beam (20°)/ Performance - Fascio medio (20°) (20°-12W, 17W, 24W, 33W)	<b>Code</b> <b>0.35156.0000</b>				


### Optics accessories/ Accessori ottiche

	<b>Description</b> Glass filter 1 mm/ Filtro vetro 1 mm/	<b>Code</b> <b>0.26407.00</b>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 		<b>Description</b> Selective filter 3000K - 4000K/ Filtro selettivo 3000K - 4000K	<b>Code</b> <b>0.26580.0000</b>	
	<b>Description</b> Colored Gel Slides (2 pieces)/ Vetri per gel colorato (2 pezzi/)	<b>Code</b> <b>0.26415.0000</b>			<b>Description</b> Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	<b>Code</b> <b>0.26447.0000</b>	
	<b>Description</b> Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K	<b>Code</b> <b>0.26564.0000</b>			<b>Description</b> Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	<b>Code</b> <b>0.26455.0000</b>	
	<b>Description</b> Selective filter 2700K - 2500K/ Filtro selettivo 2700K - 2500K	<b>Code</b> <b>0.26423.0000</b>			<b>Description</b> Elliptical beam lens/ Lente per fascio ellittico	<b>Code</b> <b>0.26495.0000</b>	
	<b>Description</b> Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K	<b>Code</b> <b>0.26431.0000</b>			<b>Description</b> Opal lens/ Lente opale	<b>Code</b> <b>0.26467.0000</b>	
	<b>Description</b> Selective filter 2700K - 2000K/ Filtro selettivo 2700K - 2000K	<b>Code</b> <b>0.26439.0000</b>			<b>Description</b> Spread lens/ Lente diffondente	<b>Code</b> <b>0.26475.0000</b>	
	<b>Description</b> Selective filter 3000K - 3600K/ Filtro selettivo 3000K - 3600K	<b>Code</b> <b>0.26572.0000</b>			<b>Description</b> Cross blade louvre/ Griglia a croce	<b>Code</b> <b>0.26483.0000</b>	
					<b>Description</b> Cone 45° wall washer/ Cono 45° wall washer	<b>Code</b> <b>0.26499.00</b>	<b>Finishes</b> 12  31 



Ø 60 mm | Precision



Visible trim/  
Con flangia

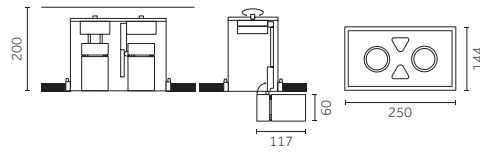

Trimless/  
Senza flangia

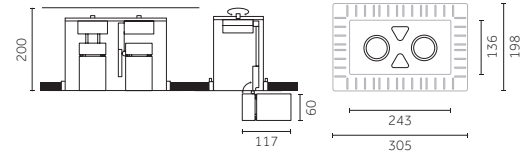

Code example:  
X . 1M52 A . HW 12

Accessories: p.506  
Finishes: p.380  
Drivers: p.512-513  
Photometric data:  
www.reggiani.net

**9 W POWERLED** Lumen delivered up to 2x770 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>1M52</b> Visible trim	<b>A</b> 8° Very narrow	<b>HW</b>	2700	>90	2x725	<3	<b>12</b>
	<b>2M52</b> Trimless		<b>HQ</b>	3000	>90	2x730	<3	<b>31</b>
			<b>WW</b>	3000	>80	2x845	<3	
			<b>NN</b>	4000	>80	2x940	<3	

LED nominal lumen

**9 W COB LED** Lumen delivered up to 2x1115 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>NM52</b> Visible trim	<b>B</b> 12° Narrow	<b>HC</b>	3000	>98	2x960	<2	<b>12</b>
	<b>PM52</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	2x1050	<2	<b>31</b>
		<b>K</b> - Without optics	<b>HQ</b>	3000	>90	2x1100	<2	
			<b>WW</b>	3000	>80	2x1300	<3	
			<b>NN</b>	4000	>80	2x1360	<3	

LED nominal lumen

**12 W COB LED** Lumen delivered up to 2x1455 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>NM53</b> Visible trim	<b>B</b> 12° Narrow	<b>HC</b>	3000	>98	2x1250	<2	<b>12</b>
	<b>PM53</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	2x1370	<2	<b>31</b>
		<b>K</b> - Without optics	<b>HQ</b>	3000	>90	2x1420	<2	
			<b>WW</b>	3000	>80	2x1700	<3	
			<b>NN</b>	4000	>80	2x1775	<3	

LED nominal lumen

**12 W Warm Dimming COB LED** Lumen delivered up to 2x690 lm / Lumen maintenance: L70 B50=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>NM53</b> Visible trim	<b>B</b> 27° Medium	<b>DT</b>	1700-3000	>95	2x100-1000	<4	<b>12</b>
	<b>PM53</b> Trimless							<b>31</b>

LED nominal lumen


# Ø 60 mm | Performance



Visible trim/  
Con flangia

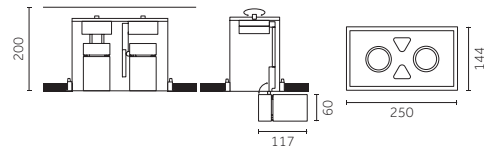

Trimless/  
Senza flangia

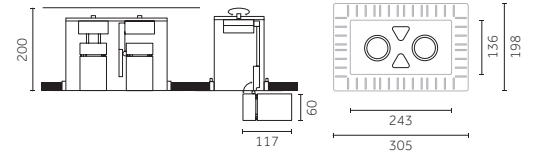

Code example:

X . **NM62** . B . **HC** . **12**

Accessories: p.507  
 Finishes: p.380  
 Drivers: p.512-513  
 Photometric data:  
 www.reggiani.net

**9W COBLED** Lumen delivered up to 2x1200lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>NM62</b> Visible trim	<b>B</b> 13° Narrow	<b>HC</b>	3000	>98	2x960	<2	<b>12</b>
	<b>PM62</b> Trimless	<b>E</b> 24° Medium	<b>HW</b>	2700	>90	2x1050	<2	<b>31</b>
		<b>H</b> 40° Wide	<b>HQ</b>	3000	>90	2x1100	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	2x1300	<3	
			<b>NN</b>	4000	>80	2x1360	<3	

LED nominal lumen

**12W COBLED** Lumen delivered up to 2x1560lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>NM63</b> Visible trim	<b>B</b> 13° Narrow	<b>HC</b>	3000	>98	2x1250	<2	<b>12</b>
	<b>PM63</b> Trimless	<b>E</b> 24° Medium	<b>HW</b>	2700	>90	2x1370	<2	<b>31</b>
		<b>H</b> 40° Wide	<b>HQ</b>	3000	>90	2x1420	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	2x1700	<3	
			<b>NN</b>	4000	>80	2x1775	<3	



LED nominal lumen







## Ø 60 mm | Precision | Accessories

### Interchangeable IOS optics/ Ottiche intercambiabili IOS








		<b>Description</b> Precision - Narrow beam/ Precision - Fascio stretto (12°-9W, 12W)	<b>Code</b> <u>0.35125.0000</u>
---	---	---	------------------------------------


Not for codes/Non per codici: **1M52A / 2M52A / NM53B.DT / PM53B.DT**


		<b>Description</b> Precision - Medium beam/ Precision - Fascio medio (20°-9W, 12W)	<b>Code</b> <u>0.35126.0000</u>
---	--	---	------------------------------------


Not for codes/Non per codici: **1M52A / 2M52A / NM53B.DT / PM53B.DT**


### Optics accessories/ Accessori ottiche


	<b>Description</b> Glass filter 1 mm Filtro vetro 1 mm/	<b>Code</b> <u>0.26402.00</u>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 
---	---	----------------------------------	---

	<b>Description</b> Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	<b>Code</b> <u>0.26442.0000</u>
---	---	------------------------------------


	<b>Description</b> Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	<b>Code</b> <u>0.26450.0000</u>
---	--	------------------------------------


	<b>Description</b> Colored Gel Slides (2 pieces)/ Vetrini per gel colorato (2 pezzi/)	<b>Code</b> <u>0.26410.0000</u>
---	---	------------------------------------


	<b>Description</b> Elliptical beam lens/ Lente per fascio ellittico	<b>Code</b> <u>0.26457.0000</u>
---	---	------------------------------------

	<b>Description</b> Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K	<b>Code</b> <u>0.26559.0000</u>
--	---	------------------------------------


	<b>Description</b> Opal lens/ Lente opale	<b>Code</b> <u>0.26462.0000</u>
--	---	------------------------------------


	<b>Description</b> Selective filter 2700K - 2500K/ Filtro selettivo 2700K - 2500K	<b>Code</b> <u>0.26418.0000</u>
---	---	------------------------------------


	<b>Description</b> Spread lens/ Lente diffondente	<b>Code</b> <u>0.26470.0000</u>
---	---	------------------------------------




	<b>Description</b> Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K	<b>Code</b> <u>0.26426.0000</u>
---	---	------------------------------------


	<b>Description</b> Cross blade louvre/ Griglia a croce	<b>Code</b> <u>0.26477.0000</u>
---	--	------------------------------------

	<b>Description</b> Selective filter 2700K - 2000K/ Filtro selettivo 2700K - 2000K	<b>Code</b> <u>0.26434.0000</u>
---	---	------------------------------------

	<b>Description</b> Barn doors/ Alette rompiflusso	<b>Code</b> <u>0.26485.0000</u>
---	---	------------------------------------







	<b>Description</b> Selective filter 3000K - 3600K/ Filtro selettivo 3000K - 3600K	<b>Code</b> <u>0.26567.0000</u>
---	---	------------------------------------

	<b>Description</b> Cone 45° wall washer/ Cono 45° wall washer	<b>Code</b> <u>0.26489.00</u>	<b>Finishes</b> 12  31 
---	---	----------------------------------	---
























	<b>Description</b> Selective filter 3000K - 4000K/ Filtro selettivo 3000K - 4000K	<b>Code</b> <u>0.26575.0000</u>
---	---	------------------------------------

Ø 60 mm | Performance | Accessories

Interchangeable IOS optics/  
Ottiche intercambiabili IOS

		<b>Description</b> Performance - Narrow beam/ Performance - Fascio stretto (13°-9W, 12W)	<b>Code</b> <u>0.35145.0000</u>			<b>Description</b> Performance - Wide beam/ Performance - Fascio largo (40°-9W, 12W)	<b>Code</b> <u>0.35147.0000</u>
		<b>Description</b> Performance - Medium beam/ Performance - Fascio medio (24°-9W, 12W)	<b>Code</b> <u>0.35146.0000</u>				


Optics accessories/  
Accessori ottiche

	<b>Description</b> Glass filter 1 mm Filtro vetro 1 mm/	<b>Code</b> <u>0.26403.00</u>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 		<b>Description</b> Selective filter 3000K - 4000K/ Filtro selettivo 3000K - 4000K	<b>Code</b> <u>0.26576.0000</u>	
	<b>Description</b> Colored Gel Slides (2 pieces)/ Vetri per gel colorato (2 pezzi)/	<b>Code</b> <u>0.26411.0000</u>			<b>Description</b> Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	<b>Code</b> <u>0.26443.0000</u>	
	<b>Description</b> Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K	<b>Code</b> <u>0.26560.0000</u>			<b>Description</b> Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	<b>Code</b> <u>0.26451.0000</u>	
	<b>Description</b> Selective filter 2700K - 2500K/ Filtro selettivo 2700K - 2500K	<b>Code</b> <u>0.26419.0000</u>			<b>Description</b> Elliptical beam lens/ Lente per fascio ellittico	<b>Code</b> <u>0.26493.0000</u>	
	<b>Description</b> Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K	<b>Code</b> <u>0.26427.0000</u>			<b>Description</b> Opal lens/ Lente opale	<b>Code</b> <u>0.26463.0000</u>	
	<b>Description</b> Selective filter 2700K - 2000K/ Filtro selettivo 2700K - 2000K	<b>Code</b> <u>0.26435.0000</u>			<b>Description</b> Spread lens/ Lente diffondente	<b>Code</b> <u>0.26471.0000</u>	
	<b>Description</b> Selective filter 3000K - 3600K/ Filtro selettivo 3000K - 3600K	<b>Code</b> <u>0.26568.0000</u>			<b>Description</b> Cross blade louvre/ Griglia a croce	<b>Code</b> <u>0.26481.0000</u>	
					<b>Description</b> Cone 45° wall washer/ Cono 45° wall washer	<b>Code</b> <u>0.26497.00</u>	<b>Finishes</b> 12  31 



Ø 95 mm | Precision



Visible trim/  
Con flangia

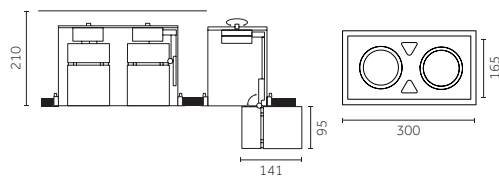

Trimless/  
Senza flangia

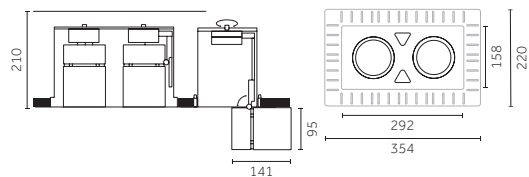

Code example:  
X . QM53 B . HC 12

Accessories: p.510  
Finishes: p.380  
Drivers: p.512-513  
Photometric data:  
www.reggiani.net

**12 W COB LED** Lumen delivered up to 2x 1690 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	QM53 Visible trim	B 12° Narrow	HC	3000	>98	2x1323	<2	12
	RM53 Trimless	E 24° Medium	HW	2700	>90	2x1491	<2	31
		K - Without optics	HQ	3000	>90	2x1533	<2	
			WW	3000	>80	2x1859	<3	
			NN	4000	>80	2x1920	<3	

LED nominal lumen

**17 W COB LED** Lumen delivered up to 2x 1510 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	3M54 Visible trim	A 7° Very narrow	HC	3000	>98	2x1700	<2	12
	4M54 Trimless		HW	2700	>90	2x1870	<2	31
			HQ	3000	>90	2x1920	<2	
			WW	3000	>80	2x2320	<3	
			NN	4000	>80	2x2400	<3	

LED nominal lumen

**17 W COB LED** Lumen delivered up to 2x 2350 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	QM54 Visible trim	B 12° Narrow	HC	3000	>98	2x1834	<2	12
	RM54 Trimless	E 24° Medium	HW	2700	>90	2x2067	<2	31
		K - Without optics	HQ	3000	>90	2x2122	<2	
			WW	3000	>80	2x2582	<3	
			NN	4000	>80	2x2665	<3	

LED nominal lumen

**24 W COB LED** Lumen delivered up to 2x 3170 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	QM56 Visible trim	B 12° Narrow	HC	3000	>98	2x2476	<2	12
	RM56 Trimless	E 24° Medium	HW	2700	>90	2x2792	<2	31
		K - Without optics	HQ	3000	>90	2x2860	<2	
			WW	3000	>80	2x3487	<3	
			NN	4000	>80	2x3602	<3	

LED nominal lumen

**33 W COB LED** Lumen delivered up to 2x 4080 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	QM58 Visible trim	B 12° Narrow	HC	3000	>98	3142	<2	12
	RM58 Trimless	E 24° Medium	HW	2700	>90	3635	<2	31
		K - Without optics	HQ	3000	>90	3735	<2	
			WW	3000	>80	4510	<3	
			NN	4000	>80	4695	<3	

LED nominal lumen

**33 W Warm Dimming COB LED** Lumen delivered up to 1520 lm / Lumen maintenance: L70 B50=50,000h


Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	QM58 Visible trim	B 27° Medium	DT	1700-3000	>95	2x100-3100	<4	12
	RM58 Trimless							31

LED nominal lumen



# Ø 95 mm | Performance



Visible trim/  
Con flangia

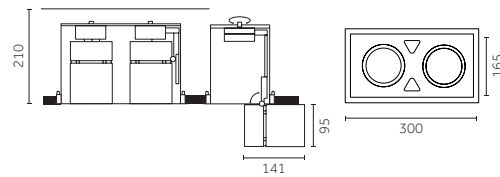

Trimless/  
Senza flangia

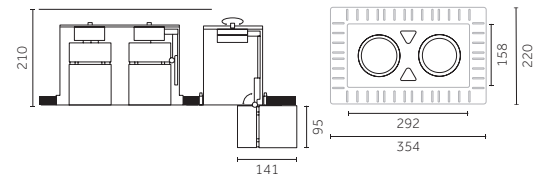

Code example:

X . **QM63** . B . **HC** . **12**

Accessories: p.511  
 Finishes: p.380  
 Drivers: p.512-513  
 Photometric data:  
 www.reggiani.net

12 W COBLED		Lumen delivered up to 2x1800 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>QM63</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	2x1323	<2	<b>12</b>
	<b>RM63</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	2x1491	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	2x1533	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	2x1859	<3	
			<b>NN</b>	4000	>80	2x1920	<3	

LED nominal lumen

17 W COBLED		Lumen delivered up to 2x2500 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>QM64</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	2x1834	<2	<b>12</b>
	<b>RM64</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	2x2067	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	2x2122	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	2x2582	<3	
			<b>NN</b>	4000	>80	2x2665	<3	

LED nominal lumen

24 W COBLED		Lumen delivered up to 2x3300 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>QM66</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	2x2476	<2	<b>12</b>
	<b>RM66</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	2x2792	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	2x2860	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	2x3487	<3	
			<b>NN</b>	4000	>80	2x3602	<3	

LED nominal lumen


33 W COBLED		Lumen delivered up to 2x4130 lm / Lumen maintenance: L80 B10=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>QM68</b> Visible trim	<b>B</b> 10° Narrow	<b>HC</b>	3000	>98	2x3142	<2	<b>12</b>
	<b>RM68</b> Trimless	<b>E</b> 20° Medium	<b>HW</b>	2700	>90	2x3635	<2	<b>31</b>
		<b>H</b> 31° Wide	<b>HQ</b>	3000	>90	2x3735	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	2x4510	<3	
			<b>NN</b>	4000	>80	2x4695	<3	

LED nominal lumen




## Ø 95 mm | Precision | Accessories

### Interchangeable IOS optics/ Ottiche intercambiabili IOS



**Description**  
Precision - Narrow beam /  
Precision - Fascio stretto  
(12°-12W, 17W, 24W, 33W)

**Code**  
0.35135.0000



**Description**  
Precision - Medium beam /  
Precision - Fascio medio  
(24°-12W, 17W, 24W, 33W)

**Code**  
0.35136.0000

Not for codes/Non per codici: **3M54A / 4M54A / QM58B.DT / RM58B.DT**

Not for codes/Non per codici: **3M54A / 4M54A / QM58B.DT / RM58B.DT**

### Optics accessories/ Accessori ottiche



**Description**  
Glass filter 1 mm  
Filtro vetro 1 mm/

**Code**  
0.26406.00


**Finishes**

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



**Description**  
Dense texture honeycomb louvre/  
Griglia alveolare a maglia fitta

**Code**  
0.26446.0000



**Description**  
Wide texture honeycomb louvre/  
Griglia alveolare a maglia larga

**Code**  
0.26454.0000



**Description**  
Colored Gel Slides (2 pieces)/  
Vetrini per gel colorato (2 pezzi/)

**Code**  
0.26414.0000



**Description**  
Elliptical beam lens/  
Lente per fascio ellittico

**Code**  
0.26459.0000



**Description**  
Selective filter 3000K - 2700K /  
Filtro selettivo 3000K - 2700K

**Code**  
0.26563.0000




**Description**  
Opal lens/  
Lente opale

**Code**  
0.26466.0000



**Description**  
Selective filter 2700K - 2500K /  
Filtro selettivo 2700K - 2500K

**Code**  
0.26422.0000



**Description**  
Spread lens/  
Lente diffondente

**Code**  
0.26474.0000




**Description**  
Selective filter 2700K - 2200K /  
Filtro selettivo 2700K - 2200K

**Code**  
0.26430.0000



**Description**  
Cross blade louvre/  
Griglia a croce

**Code**  
0.26479.0000



**Description**  
Selective filter 2700K - 2000K /  
Filtro selettivo 2700K - 2000K

**Code**  
0.26438.0000



**Description**  
Barn doors/  
Alette rompiflusso

**Code**  
0.26487.0000



**Description**  
Selective filter 3000K - 3600K /  
Filtro selettivo 3000K - 3600K

**Code**  
0.26571.0000



**Description**  
Cone 45° wall washer/  
Cono 45° wall washer







**Code**  
0.26491.00

**Finishes**
























12	White
31	Black

Ø 95 mm | Performance | Accessories

Interchangeable IOS optics/  
Ottiche intercambiabili IOS

		<b>Description</b> Performance - Narrow beam/ Performance - Fascio stretto (10°-12W, 17W, 24W, 33W)	<b>Code</b> <u>0.35155.0000</u>			<b>Description</b> Performance - Wide beam/ Performance - Fascio largo (31°-12W, 17W, 24W, 33W)	<b>Code</b> <u>0.35157.0000</u>
		<b>Description</b> Performance - Medium beam/ Performance - Fascio medio (20°-12W, 17W, 24W, 33W)	<b>Code</b> <u>0.35156.0000</u>				




Optics accessories/  
Accessori ottiche

	<b>Description</b> Glass filter 1 mm Filtro vetro 1 mm/	<b>Code</b> <u>0.26407.00</u>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 		<b>Description</b> Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K	<b>Code</b> <u>0.26580.0000</u>	
	<b>Description</b> Colored Gel Slides (2 pieces) / Vetri per gel colorato (2 pezzi)/	<b>Code</b> <u>0.26415.0000</u>			<b>Description</b> Dense texture honeycomb louvre / Griglia alveolare a maglia fitta	<b>Code</b> <u>0.26447.0000</u>	
	<b>Description</b> Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K	<b>Code</b> <u>0.26564.0000</u>			<b>Description</b> Wide texture honeycomb louvre / Griglia alveolare a maglia larga	<b>Code</b> <u>0.26455.0000</u>	
	<b>Description</b> Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K	<b>Code</b> <u>0.26423.0000</u>			<b>Description</b> Elliptical beam lens / Lente per fascio ellittico	<b>Code</b> <u>0.26495.0000</u>	
	<b>Description</b> Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K	<b>Code</b> <u>0.26431.0000</u>			<b>Description</b> Opal lens / Lente opale	<b>Code</b> <u>0.26467.0000</u>	
	<b>Description</b> Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K	<b>Code</b> <u>0.26439.0000</u>			<b>Description</b> Spread lens / Lente diffondente	<b>Code</b> <u>0.26475.0000</u>	
	<b>Description</b> Selective filter 3000K - 3600K / Filtro selettivo 3000K - 3600K	<b>Code</b> <u>0.26572.0000</u>			<b>Description</b> Cross blade louvre / Griglia a croce	<b>Code</b> <u>0.26483.0000</u>	
					<b>Description</b> Cone 45° wall washer / Cono 45° wall washer	<b>Code</b> <u>0.26499.00</u>	<b>Finishes</b> 12  31 

# Electrical Devices

## Ø 60 mm | Ø 95 mm | Electrical Devices

### Other devices/ Altri dispositivi





Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max.distance	Cable section
•)) Wireless bluetooth control device/ Dispositivo di controllo wireless bluetooth	<b>0.26101.0000</b>		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm <sup>2</sup>
+ 1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h	<b>0.35081.0000</b>		105 mm	220-240V / 50/60 Hz	Max: 1	20 m	1.5 mm <sup>2</sup>
+ 3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h	<b>0.35081.UK00</b>		105 mm	220-240V / 50/60 Hz	Max: 1	20 m	1.5 mm <sup>2</sup>

For LED fixtures (17-34W), Ni/Cd battery/Per apparecchi LED (17-34W), batterie Ni/Cd





## Ø 60 mm | Electrical Devices

### Driver/ Alimentazioni





#### 9 W POWER LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30420.0000</b>	20		56 mm	198-264Vac 170-280Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30420.0000</b>	12		45 mm	230-240 / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30420.0000</b>	20		56 mm	99-264Vac 170-280Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30420.0000</b>	20		56 mm	99-264Vac 170-280Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>




#### 9 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30021.0000</b>	10		51 mm	220-240Vac / 50/60Hz	260	Min: 1	10 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30021.0000</b>	10		52 mm	220-240Vac / 50/60Hz	260	Min: 1	10 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30021.0000</b>	33		45 mm	220-240Vac / 50/60Hz	260	Min: 1	10 m	1.5 mm <sup>2</sup>
DALI	<b>D.30021.0000</b>	33		45 mm	220-240Vac / 50/60Hz	260	Min: 1	10 m	1.5 mm <sup>2</sup>

#### 12 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30412.0000</b>	20		56 mm	198-264Vac 170-280Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30412.0000</b>	20		52 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30040.0000</b>	33		45 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30040.0000</b>	33		45 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>





#### 12 W Warm Dimming COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Phase-cut	<b>T.30424.0000</b>	18		52 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30040.0000</b>	33		45 mm	198-264Vac 170-280Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30040.0000</b>	33		45 mm	198-264Vac 176-264Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>





## Ø 95 mm | Electrical Devices

### Driver/ Alimentazioni





#### 12 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30341.0000</b>	25		54 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30412.0000</b>	18		52 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30341.0000</b>	33		45 mm	120-277Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30341.0000</b>	36		54 mm	99-264Vac 170-280Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>




#### 17 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30400.0000</b>	20		56 mm	198-264Vac 170-280Vdc / 0.50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30400.0000</b>	22		52 mm	220-240Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30400.0000</b>	20		45 mm	99-264Vac 170-280Vdc / 0.50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30400.0000</b>	20		45 mm	99-264Vac 176-264Vdc / 0.50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>




#### 24 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30041.0000</b>	40		57 mm	100-240Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30041.0000</b>	36		57 mm	220-240Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30041.0000</b>	33		45 mm	220-240Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30041.0000</b>	32		70 mm	99-264Vac 176-264Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>

#### 33 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30408.0000</b>	38		52 mm	198-264Vac 176-264Vdc / 50/60Hz	950	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30408.0000</b>	40		82 mm	99-264Vac 170-280Vdc / 0.50/60Hz	950	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30408.0000</b>	40		82 mm	198-264Vac 170-280Vdc / 0.50/60Hz	950	Min: 1	20 m	1.5 mm <sup>2</sup>

#### 33 W Warm dimming COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Phase-cut	<b>T.30348.0000</b>	40		45 mm	220-240Vac / 50/60Hz	900	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30425.0000</b>	45		60 mm	220-240Vac / 50/60Hz	900	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30346.0000</b>	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	900	Min: 1	20 m	1.5 mm <sup>2</sup>





—

**Yori**

**Semi-recessed**



Ø 43 mm | Precision



Code example:  
**X** . **FM31** . **A** . **HW** **12**

Accessories: p.518  
 Finishes: p.380  
 Drivers: p.532-535  
 Photometric data:  
 www.reggiani.net

**4 W POWERLED** Lumen delivered up to 435 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<b>X</b> Not included	<b>FM31</b> Precision	<b>A</b> 7° Very narrow	<b>HW</b>	2700	>90	410	<3	<b>12</b> <input type="checkbox"/>
		<b>B</b> 11° Narrow	<b>HQ</b>	3000	>90	415	<3	<b>31</b> <input checked="" type="checkbox"/>
		<b>E</b> 23° Medium	<b>WW</b>	3000	>80	485	<3	
		<b>H</b> 40° Wide	<b>NN</b>	4000	>80	530	<3	

LED nominal lumen

**9 W POWERLED** Lumen delivered up to 750 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<b>X</b> Not included	<b>FM32</b> Precision	<b>A</b> 7° Very narrow	<b>HW</b>	2700	>90	725	<3	<b>12</b> <input type="checkbox"/>
		<b>B</b> 11° Narrow	<b>HQ</b>	3000	>90	730	<3	<b>31</b> <input checked="" type="checkbox"/>
		<b>E</b> 23° Medium	<b>WW</b>	3000	>80	845	<3	
		<b>H</b> 40° Wide	<b>NN</b>	4000	>80	940	<3	



LED nominal lumen

**6,5 W Warm Dimming COB LED** Lumen delivered up to 130 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
<b>X</b> Not included	<b>FM32</b> Precision	<b>B</b> 27° Medium	<b>DT</b>	1800-2800	>95	10-550	<4	<b>12</b> <input type="checkbox"/>
								<b>31</b> <input checked="" type="checkbox"/>

LED nominal lumen

# Ø 43 mm | Performance



Code example:

X . FM41 B . HW 12

Accessories: p.519  
 Finishes: p.380  
 Drivers: p.532-535  
 Photometric data:  
 www.reggiani.net

**4W POWER LED** Lumen delivered up to 450 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	FM41 Performance	B 6° Narrow	HW	2700	>90	410	<3	12
		E 18° Medium	HQ	3000	>90	415	<3	31
		H 36° Wide	WW	3000	>80	485	<3	
			NN	4000	>80	530	<3	

LED nominal lumen

**9W POWER LED** Lumen delivered up to 780 lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	FM42 Performance	B 6° Narrow	HW	2700	>90	725	<3	12
		E 18° Medium	HQ	3000	>90	730	<3	31
		H 36° Wide	WW	3000	>80	845	<3	
			NN	4000	>80	940	<3	

LED nominal lumen



## Ø 43 mm | Precision Accessories

### Optics accessories/ Accessori ottiche



Image	Description	Code	Finishes		Image	Description	Code	Finishes	
			4A	5A				6A	7A
	Glass filter 1 mm Filtro vetro 1 mm/	<u>0.26400.00</u>	4A	5A		Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	<u>0.26440.0000</u>		
			6A	7A		Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	<u>0.26448.0000</u>		
			8A	9A					
	Colored Gel Slides (2 pieces) Vetrini per gel colorato (2 pezzi)/	<u>0.26408.0000</u>				Elliptical beam lens/ Lente per fascio ellittico	<u>0.26456.0000</u>		
	Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K	<u>0.26557.0000</u>				Opal lens/ Lente opale	<u>0.26460.0000</u>		
	Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K	<u>0.26416.0000</u>				Spread lens/ Lente diffondente	<u>0.26468.0000</u>		
	Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K	<u>0.26424.0000</u>				Cross blade louvre/ Griglia a croce	<u>0.26476.0000</u>		
	Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K	<u>0.26432.0000</u>				Barn doors/ Alette rompiflusso	<u>0.26484.0000</u>		
	Selective filter 3000K - 3600K / Filtro selettivo 3000K - 3600K	<u>0.26565.0000</u>				Cone 45° wall washer/ Cono 45° wall washer	<u>0.26488.00</u>	12	31
	Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K	<u>0.26573.0000</u>				Short snoot/ Cilindro corto	<u>0.26556.0000</u>	12	31

## Ø 43 mm | Performance Accessories

### Optics accessories/ Accessori ottiche

Image	Description	Code	Finishes		Image	Description	Code	Finishes	
			4A	5A				6A	7A
	Glass filter 1 mm Filtro vetro 1 mm/	<u>0.26401.00</u>	4A	5A		Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K	<u>0.26574.0000</u>		
	Colored Gel Slides (2 pieces)/ Vetrini per gel colorato (2 pezzi)/	<u>0.26409.0000</u>	6A	7A		Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	<u>0.26441.0000</u>		
	Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K	<u>0.26558.0000</u>	8A	9A		Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	<u>0.26449.0000</u>		
	Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K	<u>0.26417.0000</u>				Elliptical beam lens/ Lente per fascio ellittico	<u>0.26492.0000</u>		
	Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K	<u>0.26425.0000</u>				Opal lens/ Lente opale	<u>0.26461.0000</u>		
	Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K	<u>0.26433.0000</u>				Spread lens/ Lente diffondente	<u>0.26469.0000</u>		
	Selective filter 3000K - 3600K / Filtro selettivo 3000K - 3600K	<u>0.26566.0000</u>				Cross blade louvre/ Griglia a croce	<u>0.26480.0000</u>		
						Cone 45° wall washer/ Cono 45° wall washer	<u>0.26496.00</u>	12	31

Ø 60 mm | Precision



Code example:  
**X . NM32 A . HW 12**

Accessories: p.522  
 Finishes: p.380  
 Drivers: p.532-535  
 Photometric data:  
 www.reggiani.net

**9 W POWERLED** Lumen delivered up to 770lm / Lumen maintenance: L90 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	NM32 Precision	A 8° Very narrow	HW	2700	>90	725	<3	12 <input type="checkbox"/>
			HQ	3000	>90	730	<3	31 <input type="checkbox"/>
			WW	3000	>80	845	<3	
			NN	4000	>80	940	<3	

LED nominal lumen

**9 W COBLED** Lumen delivered up to 1115 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM32 Precision	B 12° Narrow	HC	3000	>98	960	<2	12 <input type="checkbox"/>
		E 20° Medium	HW	2700	>90	1050	<2	31 <input type="checkbox"/>
		K - Without optics	HQ	3000	>90	1100	<2	
			WW	3000	>80	1300	<3	
			NN	4000	>80	1360	<3	

LED nominal lumen

**12 W COBLED** Lumen delivered up to 1455 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM33 Precision	B 12° Narrow	HC	3000	>98	1250	<2	12 <input type="checkbox"/>
		E 20° Medium	HW	2700	>90	1370	<2	31 <input type="checkbox"/>
		K - Without optics	HQ	3000	>90	1420	<2	
			WW	3000	>80	1700	<3	
			NN	4000	>80	1775	<3	

LED nominal lumen

**17 W COBLED** Lumen delivered up to 1970lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM34 Precision	B 12° Narrow	HC	3000	>98	1700	<2	12 <input type="checkbox"/>
		E 20° Medium	HW	2700	>90	1870	<2	31 <input type="checkbox"/>
		K - Without optics	HQ	3000	>90	1920	<2	
			WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	



LED nominal lumen

**12 W Warm Dimming COBLED** Lumen delivered up to 690lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM33 Precision	B 27° Medium	DT	1700-3000	>95	100-1000	<4	12 <input type="checkbox"/>
								31 <input type="checkbox"/>

LED nominal lumen

# Ø 60 mm | Performance



Code example:

X . GM42 B . HC 12

Accessories: p.523  
 Finishes: p.380  
 Drivers: p.532-535  
 Photometric data:  
 www.reggiani.net

## 9W COBLED Lumen delivered up to 1200lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM42 Performance	B 13° Narrow	HC	3000	>98	960	<2	12
		E 24° Medium	HW	2700	>90	1050	<2	31
		H 40° Wide	HQ	3000	>90	1100	<2	
		K - Without optics	WW	3000	>80	1300	<3	
			NN	4000	>80	1360	<3	

LED nominal lumen

## 12W COBLED Lumen delivered up to 1560lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM43 Performance	B 13° Narrow	HC	3000	>98	1250	<2	12
		E 24° Medium	HW	2700	>90	1370	<2	31
		H 40° Wide	HQ	3000	>90	1420	<2	
		K - Without optics	WW	3000	>80	1700	<3	
			NN	4000	>80	1775	<3	

LED nominal lumen


## 17W COBLED Lumen delivered up to 2110lm / Lumen maintenance: L80B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	GM44 Performance	B 13° Narrow	HC	3000	>98	1700	<2	12
		E 24° Medium	HW	2700	>90	1870	<2	31
		H 40° Wide	HQ	3000	>90	1920	<2	
		K - Without optics	WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	

LED nominal lumen





## Ø 60 mm | Precision | Accessories

Interchangeable IOS optics/  
Ottiche intercambiabili IOS

**Description**  
Precision - Narrow beam/  
Precision - Fascio stretto  
(12°-9W, 12W, 17W)

**Code**  
**0.35125.0000**



**Description**  
Precision - Medium beam/  
Precision - Fascio medio  
(20°-9W, 12W, 17W)

**Code**  
**0.35126.0000**

Not for codes/Non per codici: **NM32A / GM53B.DT**

Not for codes/Non per codici: **NM32A / GM53B.DT**

Optics accessories/  
Accessori ottiche

**Description**  
Glass filter 1 mm  
Filtro vetro 1 mm/

**Code**  
**0.26402.00**


**Finishes**

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



**Description**  
Dense texture honeycomb louvre/  
Griglia alveolare a maglia fitta

**Code**  
**0.26442.0000**



**Description**  
Wide texture honeycomb louvre/  
Griglia alveolare a maglia larga

**Code**  
**0.26450.0000**



**Description**  
Colored Gel Slides (2 pieces)/  
Vetrini per gel colorato (2 pezzi)/

**Code**  
**0.26410.0000**



**Description**  
Elliptical beam lens/  
Lente per fascio ellittico

**Code**  
**0.26457.0000**



**Description**  
Selective filter 3000K - 2700K/  
Filtro selettivo 3000K - 2700K

**Code**  
**0.26559.0000**




**Description**  
Opal lens/  
Lente opale

**Code**  
**0.26462.0000**



**Description**  
Selective filter 2700K - 2500K/  
Filtro selettivo 2700K - 2500K

**Code**  
**0.26418.0000**



**Description**  
Spread lens/  
Lente diffondente

**Code**  
**0.26470.0000**




**Description**  
Selective filter 2700K - 2200K/  
Filtro selettivo 2700K - 2200K

**Code**  
**0.26426.0000**




**Description**  
Cross blade louvre/  
Griglia a croce

**Code**  
**0.26477.0000**



**Description**  
Selective filter 2700K - 2000K/  
Filtro selettivo 2700K - 2000K

**Code**  
**0.26434.0000**




**Description**  
Barn doors/  
Alette rompiflusso

**Code**  
**0.26485.0000**



**Description**  
Selective filter 3000K - 3600K/  
Filtro selettivo 3000K - 3600K

**Code**  
**0.26567.0000**



**Description**  
Cone 45° wall washer/  
Cono 45° wall washer

**Code**  
**0.26489.0000**


**Finishes**

12	White
31	Black



**Description**  
Selective filter 3000K - 4000K/  
Filtro selettivo 3000K - 4000K

**Code**  
**0.26575.0000**


Framing accessory/  
Sagomatore

**Description**  
Framing accessory, light shape - square/  
Sagomatore, forma di luce - quadrata

**Code**  
**0.26651.00**

**Finishes**

21	Black
----	-------



**Description**  
Framing accessory, light shape - round/  
Sagomatore, forma di luce - tonda







**Code**  
**0.26650.00**

**Finishes**
























21	Black
----	-------

## Ø 60 mm | Performance | Accessories







### Interchangeable IOS optics/ Ottiche intercambiabili IOS

		<b>Description</b> Performance - Narrow beam/ Performance - Fascio stretto (13°-9W, 12W, 17W)	<b>Code</b> <b>0.35145.0000</b>			<b>Description</b> Performance - Wide beam/ Performance - Fascio largo (40°-9W, 12W, 17W)	<b>Code</b> <b>0.35147.0000</b>
		<b>Description</b> Performance - Medium beam/ Performance - Fascio medio (24°-9W, 12W, 17W)	<b>Code</b> <b>0.35146.0000</b>				



### Optics accessories/ Accessori ottiche

	<b>Description</b> Glass filter 1 mm Filtro vetro 1 mm/	<b>Code</b> <b>0.26403.00</b>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 		<b>Description</b> Selective filter 3000K - 4000K/ Filtro selettivo 3000K - 4000K	<b>Code</b> <b>0.26576.0000</b>	
	<b>Description</b> Colored Gel Slides (2 pieces)/ Vetri per gel colorato (2 pezzi)/	<b>Code</b> <b>0.26411.0000</b>			<b>Description</b> Dense texture honeycomb louvre/ Griglia alveolare a maglia fitta	<b>Code</b> <b>0.26443.0000</b>	
	<b>Description</b> Selective filter 3000K - 2700K/ Filtro selettivo 3000K - 2700K	<b>Code</b> <b>0.26560.0000</b>			<b>Description</b> Wide texture honeycomb louvre/ Griglia alveolare a maglia larga	<b>Code</b> <b>0.26451.0000</b>	
	<b>Description</b> Selective filter 2700K - 2500K/ Filtro selettivo 2700K - 2500K	<b>Code</b> <b>0.26419.0000</b>			<b>Description</b> Elliptical beam lens/ Lente per fascio ellittico	<b>Code</b> <b>0.26493.0000</b>	
	<b>Description</b> Selective filter 2700K - 2200K/ Filtro selettivo 2700K - 2200K	<b>Code</b> <b>0.26427.0000</b>			<b>Description</b> Opal lens/ Lente opale	<b>Code</b> <b>0.26463.0000</b>	
	<b>Description</b> Selective filter 2700K - 2000K/ Filtro selettivo 2700K - 2000K	<b>Code</b> <b>0.26435.0000</b>			<b>Description</b> Spread lens/ Lente diffondente	<b>Code</b> <b>0.26471.0000</b>	
	<b>Description</b> Selective filter 3000K - 3600K/ Filtro selettivo 3000K - 3600K	<b>Code</b> <b>0.26568.0000</b>			<b>Description</b> Cross blade louvre/ Griglia a croce	<b>Code</b> <b>0.26481.0000</b>	
					<b>Description</b> Cone 45° wall washer/ Cono 45° wall washer	<b>Code</b> <b>0.26497.00</b>	<b>Finishes</b> 12  31 

### Framing accessory/ Sagomatore

		<b>Description</b> Framing accessory, light shape - square/ Sagomatore, forma di luce - quadrata	<b>Code</b> <b>0.26651.00</b>	<b>Finishes</b> 21 
		<b>Description</b> Framing accessory, light shape - round/ Sagomatore, forma di luce - tonda	<b>Code</b> <b>0.26650.00</b>	<b>Finishes</b> 21 

Ø 75 mm | Precision



Code example:  
**X . LM33 B . HC 12**

Accessories: p.526  
 Finishes: p.380  
 Drivers: p.532-535  
 Photometric data:  
 www.reggiani.net

**12 W COB LED** Lumen delivered up to 1575 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM33 Precision	B 12° Narrow	HC	3000	>98	1323	<2	12
		E 24° Medium	HW	2700	>90	1491	<2	31
		K - Without optics	HQ	3000	>90	1533	<2	
			WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen

**17 W COB LED** Lumen delivered up to 1465 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	PM34 Precision	A 7° Very narrow	HC	3000	>98	1700	<2	12
			HW	2700	>90	1870	<2	31
			HQ	3000	>90	1920	<2	
			WW	3000	>80	2320	<3	
			NN	4000	>80	2400	<3	

LED nominal lumen

**17 W COB LED** Lumen delivered up to 2190 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM34 Precision	B 12° Narrow	HC	3000	>98	1834	<2	12
		E 24° Medium	HW	2700	>90	2067	<2	31
		K - Without optics	HQ	3000	>90	2122	<2	
			WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	

LED nominal lumen

**24 W COB LED** Lumen delivered up to 2955 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM36 Precision	B 12° Narrow	HC	3000	>98	2476	<2	12
		E 24° Medium	HW	2700	>90	2792	<2	31
		K - Without optics	HQ	3000	>90	2860	<2	
			WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	

LED nominal lumen

**28 W COB LED** Lumen delivered up to 3325 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM37 Performance	B 12° Narrow	HC	3000	>98	2777	<2	12
		E 24° Medium	HW	2700	>90	3137	<2	31
		K - Without optics	HQ	3000	>90	3207	<2	
			WW	3000	>80	3898	<3	
			NN	4000	>80	4054	<3	



LED nominal lumen

**25 W Warm Dimming COB LED** Lumen delivered up to 1100 lm / Lumen maintenance: L70 B50=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	LM36 Precision	B 25° Medium	DT	1700-3000	>95	100-2500	<4	12
								31

LED nominal lumen

# Ø 75 mm | Performance



Code example:

X . **LM43** . B . **HC** . **12**

Accessories: p.527  
 Finishes: p.380  
 Drivers: p.532-535  
 Photometric data:  
 www.reggiani.net

## 12 W COBLED Lumen delivered up to 1800 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>LM43</b> Performance	<b>B</b> 12° Narrow	<b>HC</b>	3000	>98	1323	<2	<b>12</b>
		<b>E</b> 24° Medium	<b>HW</b>	2700	>90	1491	<2	<b>31</b>
		<b>H</b> 48° Wide	<b>HQ</b>	3000	>90	1533	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	1859	<3	
			<b>NN</b>	4000	>80	1920	<3	

LED nominal lumen

## 17 W COBLED Lumen delivered up to 2480 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>LM44</b> Performance	<b>B</b> 12° Narrow	<b>HC</b>	3000	>98	1834	<2	<b>12</b>
		<b>E</b> 24° Medium	<b>HW</b>	2700	>90	2067	<2	<b>31</b>
		<b>H</b> 48° Wide	<b>HQ</b>	3000	>90	2122	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	2582	<3	
			<b>NN</b>	4000	>80	2665	<3	

LED nominal lumen

## 24 W COBLED Lumen delivered up to 3550 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>LM46</b> Performance	<b>B</b> 12° Narrow	<b>HC</b>	3000	>98	2476	<2	<b>12</b>
		<b>E</b> 24° Medium	<b>HW</b>	2700	>90	2792	<2	<b>31</b>
		<b>H</b> 48° Wide	<b>HQ</b>	3000	>90	2860	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	3487	<3	
			<b>NN</b>	4000	>80	3602	<3	

LED nominal lumen

## 28 W COBLED Lumen delivered up to 3770 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	<b>LM47</b> Performance	<b>B</b> 12° Narrow	<b>HC</b>	3000	>98	2777	<2	<b>12</b>
		<b>E</b> 24° Medium	<b>HW</b>	2700	>90	3137	<2	<b>31</b>
		<b>H</b> 48° Wide	<b>HQ</b>	3000	>90	3207	<2	
		<b>K</b> - Without optics	<b>WW</b>	3000	>80	3898	<3	
			<b>NN</b>	4000	>80	4054	<3	

LED nominal lumen


## Ø 75 mm | Precision Accessories

### Interchangeable IOS optics/ Ottiche intercambiabili IOS



**Description**  
Precision - Narrow beam/  
Precision - Fascio stretto  
(12°-12W, 17W, 24W, 28W)

**Code**  
0.35130.0000



**Description**  
Precision - Medium beam/  
Precision - Fascio medio  
(24°-12W, 17W, 24W, 28W)

**Code**  
0.35131.0000

Not for codes/Non per codici: **PM34A / LM36B.DT**

Not for codes/Non per codici: **PM34A / LM36B.DT**

### Optics accessories/ Accessori ottiche



**Description**  
Glass filter 1 mm  
Filtro vetro 1 mm/


**Code**  
0.26404.00

**Finishes**  
4A   
5A   
6A   
7A   
8A   
9A



**Description**  
Dense texture honeycomb louvre/  
Griglia alveolare a maglia fitta

**Code**  
0.26444.0000



**Description**  
Wide texture honeycomb louvre/  
Griglia alveolare a maglia larga

**Code**  
0.26452.0000



**Description**  
Colored Gel Slides (2 pieces)/  
Vetrini per gel colorato (2 pezzi/)

**Code**  
0.26412.0000



**Description**  
Elliptical beam lens/  
Lente per fascio ellittico

**Code**  
0.26458.0000



**Description**  
Selective filter 3000K - 2700K /  
Filtro selettivo 3000K - 2700K

**Code**  
0.26561.0000




**Description**  
Opal lens/  
Lente opale

**Code**  
0.26464.0000




**Description**  
Selective filter 2700K - 2500K /  
Filtro selettivo 2700K - 2500K

**Code**  
0.26420.0000



**Description**  
Spread lens/  
Lente diffondente

**Code**  
0.26472.0000




**Description**  
Selective filter 2700K - 2200K /  
Filtro selettivo 2700K - 2200K

**Code**  
0.26428.0000




**Description**  
Cross blade louvre/  
Griglia a croce

**Code**  
0.26478.0000



**Description**  
Selective filter 2700K - 2000K /  
Filtro selettivo 2700K - 2000K

**Code**  
0.26436.0000



**Description**  
Barn doors/  
Alette rompiflusso

**Code**  
0.26486.0000



**Description**  
Selective filter 3000K - 3600K /  
Filtro selettivo 3000K - 3600K

**Code**  
0.26569.0000



**Description**  
Cone 45° wall washer/  
Cono 45° wall washer

**Code**  
0.26490.00

**Finishes**  
12   
31









**Description**  
Selective filter 3000K - 4000K /  
Filtro selettivo 3000K - 4000K
























**Code**  
0.26577.0000

## Ø 75 mm | Performance Accessories

### Interchangeable IOS optics/ Ottiche intercambiabili IOS

		<b>Description</b> Performance - Narrow beam/ Performance - Fascio stretto (12°-12W, 17W, 24W, 28W)	<b>Code</b> <u>0.35150.0000</u>			<b>Description</b> Performance - Wide beam/ Performance - Fascio largo (48°-12W, 17W, 24W, 28W)	<b>Code</b> <u>0.35152.0000</u>
		<b>Description</b> Performance - Medium beam/ Performance - Fascio medio (24°-12W, 17W, 24W, 28W)	<b>Code</b> <u>0.35151.0000</u>				



### Optics accessories/ Accessori ottiche

	<b>Description</b> Glass filter 1 mm Filtro vetro 1 mm/	<b>Code</b> <u>0.26405.00</u>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 		<b>Description</b> Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K	<b>Code</b> <u>0.26578.0000</u>	
	<b>Description</b> Colored Gel Slides (2 pieces) / Vetri per gel colorato (2 pezzi)/	<b>Code</b> <u>0.26413.0000</u>			<b>Description</b> Dense texture honeycomb louvre / Griglia alveolare a maglia fitta	<b>Code</b> <u>0.26445.0000</u>	
	<b>Description</b> Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K	<b>Code</b> <u>0.26562.0000</u>			<b>Description</b> Wide texture honeycomb louvre / Griglia alveolare a maglia larga	<b>Code</b> <u>0.26453.0000</u>	
	<b>Description</b> Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K	<b>Code</b> <u>0.26421.0000</u>			<b>Description</b> Elliptical beam lens / Lente per fascio ellittico	<b>Code</b> <u>0.26494.0000</u>	
	<b>Description</b> Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K	<b>Code</b> <u>0.26429.0000</u>			<b>Description</b> Opal lens / Lente opale	<b>Code</b> <u>0.26465.0000</u>	
	<b>Description</b> Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K	<b>Code</b> <u>0.26437.0000</u>			<b>Description</b> Spread lens / Lente diffondente	<b>Code</b> <u>0.26473.0000</u>	
	<b>Description</b> Selective filter 3000K - 3600K / Filtro selettivo 3000K - 3600K	<b>Code</b> <u>0.26570.0000</u>			<b>Description</b> Cross blade louvre / Griglia a croce	<b>Code</b> <u>0.26482.0000</u>	
					<b>Description</b> Cone 45° wall washer / Cono 45° wall washer	<b>Code</b> <u>0.26498.00</u>	<b>Finishes</b> 12  31 



## Ø 95 mm | Precision

Risk 1 0.90 IP20 850° CE CB EAC



Code example:

X . MM33 B . HC 12

Accessories: p.530  
 Finishes: p.380  
 Drivers: p.532-535  
 Photometric data:  
 www.reggiani.net

12 W COB LED		Lumen delivered up to 1690lm / Lumen maintenance: L80 B10=50,000h						Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM	12	31
X Notincluded	MM33 Precision	B 12° Narrow	HC	3000	>98	1323	<2	<input type="checkbox"/>	<input type="checkbox"/>
		E 24° Medium	HW	2700	>90	1491	<2	<input type="checkbox"/>	<input checked="" type="checkbox"/>
		K - Without optics	HQ	3000	>90	1533	<2	<input type="checkbox"/>	<input type="checkbox"/>
			WW	3000	>80	1859	<3	<input type="checkbox"/>	<input type="checkbox"/>
			NN	4000	>80	1920	<3	<input type="checkbox"/>	<input type="checkbox"/>

LED nominal lumen

17 W COB LED		Lumen delivered up to 1510lm / Lumen maintenance: L80 B10=50,000h						Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM	12	31
X Notincluded	QM34 Precision	A 7° Very narrow	HC	3000	>98	1700	<2	<input type="checkbox"/>	<input type="checkbox"/>
			HW	2700	>90	1870	<2	<input type="checkbox"/>	<input checked="" type="checkbox"/>
			HQ	3000	>90	1920	<2	<input type="checkbox"/>	<input type="checkbox"/>
			WW	3000	>80	2320	<3	<input type="checkbox"/>	<input type="checkbox"/>
			NN	4000	>80	2400	<3	<input type="checkbox"/>	<input type="checkbox"/>

LED nominal lumen

17 W COB LED		Lumen delivered up to 2350lm / Lumen maintenance: L80 B10=50,000h						Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM	12	31
X Notincluded	MM34 Precision	B 12° Narrow	HC	3000	>98	1834	<2	<input type="checkbox"/>	<input type="checkbox"/>
		E 24° Medium	HW	2700	>90	2067	<2	<input type="checkbox"/>	<input checked="" type="checkbox"/>
		K - Without optics	HQ	3000	>90	2122	<2	<input type="checkbox"/>	<input type="checkbox"/>
			WW	3000	>80	2582	<3	<input type="checkbox"/>	<input type="checkbox"/>
			NN	4000	>80	2665	<3	<input type="checkbox"/>	<input type="checkbox"/>

LED nominal lumen

24 W COB LED		Lumen delivered up to 3170lm / Lumen maintenance: L80 B10=50,000h						Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM	12	31
X Notincluded	MM36 Precision	B 12° Narrow	HC	3000	>98	2476	<2	<input type="checkbox"/>	<input type="checkbox"/>
		E 24° Medium	HW	2700	>90	2792	<2	<input type="checkbox"/>	<input checked="" type="checkbox"/>
		K - Without optics	HQ	3000	>90	2860	<2	<input type="checkbox"/>	<input type="checkbox"/>
			WW	3000	>80	3487	<3	<input type="checkbox"/>	<input type="checkbox"/>
			NN	4000	>80	3602	<3	<input type="checkbox"/>	<input type="checkbox"/>

LED nominal lumen

33 W COB LED		Lumen delivered up to 4080lm / Lumen maintenance: L80 B10=50,000h						Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM	12	31
X Notincluded	MM38 Precision	B 12° Narrow	HC	3000	>98	3142	<2	<input type="checkbox"/>	<input type="checkbox"/>
		E 24° Medium	HW	2700	>90	3635	<2	<input type="checkbox"/>	<input checked="" type="checkbox"/>
		K - Without optics	HQ	3000	>90	3735	<2	<input type="checkbox"/>	<input type="checkbox"/>
			WW	3000	>80	4510	<3	<input type="checkbox"/>	<input type="checkbox"/>
			NN	4000	>80	4695	<3	<input type="checkbox"/>	<input type="checkbox"/>

LED nominal lumen



37 W COB LED		Lumen delivered up to 4480lm / Lumen maintenance: L80 B10=50,000h						Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM	12	31
X Notincluded	MM39 Precision	B 12° Narrow	HC	3000	>98	3473	<2	<input type="checkbox"/>	<input type="checkbox"/>
		E 18° Medium	HW	2700	>90	3940	<2	<input type="checkbox"/>	<input checked="" type="checkbox"/>
		K - Without optics	HQ	3000	>90	4000	<2	<input type="checkbox"/>	<input type="checkbox"/>
			WW	3000	>80	4880	<3	<input type="checkbox"/>	<input type="checkbox"/>
			NN	4000	>80	5090	<3	<input type="checkbox"/>	<input type="checkbox"/>

LED nominal lumen

33 W Warm Dimming COB LED		Lumen delivered up to 1520lm / Lumen maintenance: L70 B50=50,000h						Finishes	
Driver	Version	Optics	LED	K	CRI	lm	SDCM	12	31
X Notincluded	MM38 Precision	B 25° Medium	DT	1700-3000	>95	100-3100	<4	<input type="checkbox"/>	<input type="checkbox"/>
								<input type="checkbox"/>	<input checked="" type="checkbox"/>

LED nominal lumen

# Ø 95 mm | Performance



Code example:

X . MM43 B . HC 12

Accessories: p.531  
 Finishes: p.380  
 Drivers: p.532-535  
 Photometric data:  
 www.reggiani.net

**12 W COBLED** Lumen delivered up to 1800 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MM43 Performance	B 10° Narrow	HC	3000	>98	1323	<2	12
		E 20° Medium	HW	2700	>90	1491	<2	31
		H 31° Wide	HQ	3000	>90	1533	<2	
		K - Without optics	WW	3000	>80	1859	<3	
			NN	4000	>80	1920	<3	

LED nominal lumen

**17 W COBLED** Lumen delivered up to 2500 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MM44 Performance	B 10° Narrow	HC	3000	>98	1834	<2	12
		E 20° Medium	HW	2700	>90	2067	<2	31
		H 31° Wide	HQ	3000	>90	2122	<2	
		K - Without optics	WW	3000	>80	2582	<3	
			NN	4000	>80	2665	<3	

LED nominal lumen

**24 W COBLED** Lumen delivered up to 3300 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MM46 Performance	B 10° Narrow	HC	3000	>98	2476	<2	12
		E 20° Medium	HW	2700	>90	2792	<2	31
		H 31° Wide	HQ	3000	>90	2860	<2	
		K - Without optics	WW	3000	>80	3487	<3	
			NN	4000	>80	3602	<3	

LED nominal lumen

**33 W COBLED** Lumen delivered up to 4300 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MM48 Performance	B 10° Narrow	HC	3000	>98	3142	<2	12
		E 20° Medium	HW	2700	>90	3635	<2	31
		H 31° Wide	HQ	3000	>90	3735	<2	
		K - Without optics	WW	3000	>80	4510	<3	
			NN	4000	>80	4695	<3	

LED nominal lumen


**37 W COBLED** Lumen delivered up to 4530 lm / Lumen maintenance: L80 B10=50,000h

Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	MM49 Performance	B 10° Narrow	HC	3000	>98	3473	<2	12
		E 20° Medium	HW	2700	>90	3940	<2	31
		H 31° Wide	HQ	3000	>90	4000	<2	
		K - Without optics	WW	3000	>80	4880	<3	
			NN	4000	>80	5090	<3	

LED nominal lumen


## Ø 95 mm | Precision | Accessories

### Interchangeable IOS optics/ Ottiche intercambiabili IOS



**Description**  
Precision - Narrow beam /  
Precision - Fascio stretto  
(12°-12W, 17W, 24W, 33W, 37W)

**Code**  
0.35135.0000



**Description**  
Precision - Medium beam /  
Precision - Fascio medio  
(24°-12W, 17W, 24W, 33W, 37W)

**Code**  
0.35136.0000

Not for codes/Non per codici: **QM34A / MM38B.DT**

Not for codes/Non per codici: **QM34A / MM38B.DT**

### Optics accessories/ Accessori ottiche



**Description**  
Glass filter 1 mm /  
Filtro vetro 1 mm/

**Code**  
0.26406.00


**Finishes**

4A	Red
5A	Green
6A	Blue
7A	Pink
8A	Yellow
9A	Orange



**Description**  
Dense texture honeycomb louvre /  
Griglia alveolare a maglia fitta

**Code**  
0.26446.0000



**Description**  
Wide texture honeycomb louvre /  
Griglia alveolare a maglia larga

**Code**  
0.26454.0000



**Description**  
Colored Gel Slides (2 pieces) /  
Vetrini per gel colorato (2 pezzi)/

**Code**  
0.26414.0000



**Description**  
Elliptical beam lens /  
Lente per fascio ellittico

**Code**  
0.26459.0000



**Description**  
Selective filter 3000K - 2700K /  
Filtro selettivo 3000K - 2700K

**Code**  
0.26563.0000




**Description**  
Opal lens /  
Lente opale

**Code**  
0.26466.0000




**Description**  
Selective filter 2700K - 2500K /  
Filtro selettivo 2700K - 2500K

**Code**  
0.26422.0000



**Description**  
Spread lens /  
Lente diffondente

**Code**  
0.26474.0000




**Description**  
Selective filter 2700K - 2200K /  
Filtro selettivo 2700K - 2200K

**Code**  
0.26430.0000




**Description**  
Cross blade louvre /  
Griglia a croce

**Code**  
0.26479.0000



**Description**  
Selective filter 2700K - 2000K /  
Filtro selettivo 2700K - 2000K

**Code**  
0.26438.0000



**Description**  
Barn doors /  
Alette rompiflusso

**Code**  
0.26487.0000



**Description**  
Selective filter 3000K - 3600K /  
Filtro selettivo 3000K - 3600K

**Code**  
0.26571.0000



**Description**  
Cone 45° wall washer /  
Cono 45° wall washer

**Code**  
0.26491.00

**Finishes**

12	White
31	Black









**Description**  
Selective filter 3000K - 4000K /  
Filtro selettivo 3000K - 4000K
























**Code**  
0.26579.0000

## Ø 95 mm | Performance | Accessories

### Interchangeable IOS optics/ Ottiche intercambiabili IOS

		<b>Description</b> Performance - Narrow beam/ Performance - Fascio stretto (10°-12W, 17W, 24W, 33W, 37W)	<b>Code</b> <b>0.35155.0000</b>			<b>Description</b> Performance - Wide beam/ Performance - Fascio largo (31°-12W, 17W, 24W, 33W, 37W)	<b>Code</b> <b>0.35157.0000</b>
		<b>Description</b> Performance - Medium beam/ Performance - Fascio medio (20°-12W, 17W, 24W, 33W, 37W)	<b>Code</b> <b>0.35156.0000</b>				




### Optics accessories/ Accessori ottiche

	<b>Description</b> Glass filter 1 mm Filtro vetro 1 mm/	<b>Code</b> <b>0.26407.00</b>	<b>Finishes</b> 4A  5A  6A  7A  8A  9A 		<b>Description</b> Selective filter 3000K - 4000K / Filtro selettivo 3000K - 4000K	<b>Code</b> <b>0.26580.0000</b>	
	<b>Description</b> Colored Gel Slides (2 pieces) / Vetri per gel colorato (2 pezzi)/	<b>Code</b> <b>0.26415.0000</b>			<b>Description</b> Dense texture honeycomb louvre / Griglia alveolare a maglia fitta	<b>Code</b> <b>0.26447.0000</b>	
	<b>Description</b> Selective filter 3000K - 2700K / Filtro selettivo 3000K - 2700K	<b>Code</b> <b>0.26564.0000</b>			<b>Description</b> Wide texture honeycomb louvre / Griglia alveolare a maglia larga	<b>Code</b> <b>0.26455.0000</b>	
	<b>Description</b> Selective filter 2700K - 2500K / Filtro selettivo 2700K - 2500K	<b>Code</b> <b>0.26423.0000</b>			<b>Description</b> Elliptical beam lens / Lente per fascio ellittico	<b>Code</b> <b>0.26495.0000</b>	
	<b>Description</b> Selective filter 2700K - 2200K / Filtro selettivo 2700K - 2200K	<b>Code</b> <b>0.26431.0000</b>			<b>Description</b> Opal lens / Lente opale	<b>Code</b> <b>0.26467.0000</b>	
	<b>Description</b> Selective filter 2700K - 2000K / Filtro selettivo 2700K - 2000K	<b>Code</b> <b>0.26439.0000</b>			<b>Description</b> Spread lens / Lente diffondente	<b>Code</b> <b>0.26475.0000</b>	
	<b>Description</b> Selective filter 3000K - 3600K / Filtro selettivo 3000K - 3600K	<b>Code</b> <b>0.26572.0000</b>			<b>Description</b> Cross blade louvre / Griglia a croce	<b>Code</b> <b>0.26483.0000</b>	
					<b>Description</b> Cone 45° wall washer / Cono 45° wall washer	<b>Code</b> <b>0.26499.00</b>	<b>Finishes</b> 12  31 

# Electrical devices

Ø 43 mm | Ø 60 mm | Ø 75 mm | Ø 95 mm | Electrical Devices

## Other devices/ Altri dispositivi

Type	Code	Size (mm)	Cut-out	Tech. specifications	Connectable fixtures	Max.distance	Cable section
•)) Wireless bluetooth control device/ Dispositivo di controllo wireless bluetooth	<b>0.26101.0000</b>		45 mm	220-240V, 50-60Hz 0,6A for DALI drivers	Max: 1	-	1.5 mm <sup>2</sup>
+ 1h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 1h	<b>0.35081.0000</b>		105 mm	220-240V / 50/60 Hz	Max: 1	20 m	1.5 mm <sup>2</sup>
+ 3h maintained light emergency pack/ Gruppo emergenza di tipo sempre acceso 3h	<b>0.35081.UK00</b>		105 mm	220-240V / 50/60 Hz	Max: 1	20 m	1.5 mm <sup>2</sup>





Emergency pack for LED luminaires including Ni/Cd battery with 1h/3h back-up / Gruppo di emergenza per apparecchi LED con batterie Ni/Cd autonomia 1h/3h.

The emergency pack cannot pass through the product's cut-out, the device needs to be positioned remotely, at distance of max 5m away from the product/ Il gruppo di emergenza richiede un foro di incasso di dimensioni maggiori di quello del prodotto; il dispositivo deve quindi essere posizionato in posizione remota ad una distanza massima di 5m dal prodotto.





Ø 43 mm | Electrical Devices

## Driver/ Alimentazioni



### 4 W POWER LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30375.0000</b>	4		45 mm	198-264Vac 190-245Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30370.0000</b>	4		45 mm	230-240 / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30375.0000</b>	4		45 mm	198-264Vac 170-280Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30375.0000</b>	4		45 mm	198-264Vac 176-264Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>

### 9 W POWER LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30340.0000</b>	10		45 mm	198-264Vac 190-245Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30320.0000</b>	12		45 mm	230-240 / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30349.0000</b>	14		45 mm	198-264Vac 170-280Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30349.0000</b>	14		45 mm	198-264Vac 176-264Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>





### 6.5 W Warm dimming COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Dimm 1-10V	<b>V.30349.0000</b>	14		45 mm	198-264Vac 170-280Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30349.0000</b>	14		45 mm	198-264Vac 176-264Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>





## Ø 60 mm | Electrical Devices

### Driver/ Alimentazioni





#### 9 W POWERLED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30340.0000</b>	10		45 mm	198-264Vac 190-245Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30320.0000</b>	12		45 mm	230-240 / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30349.0000</b>	14		45 mm	198-264Vac 170-280Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30349.0000</b>	14		45 mm	198-264Vac 176-264Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>





#### 9 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30021.0000</b>	10		51 mm	220-240Vac / 50/60Hz	260	Min: 1	10 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30021.0000</b>	10		52 mm	220-240Vac / 50/60Hz	260	Min: 1	10 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30021.0000</b>	33		45 mm	120-277Vac / 50/60Hz	260	Min: 1	10 m	1.5 mm <sup>2</sup>
DALI	<b>D.30021.0000</b>	33		45 mm	220-240Vac / 50/60Hz	260	Min: 1	10 m	1.5 mm <sup>2</sup>




#### 12 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30341.0000</b>	25		54 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30412.0000</b>	18		52 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30341.0000</b>	33		45 mm	120-277Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30341.0000</b>	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>

#### 17 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	<b>0.30342.0000</b>	25		54 mm	220-240Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	<b>T.30342.0000</b>	22		52 mm	220-240Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30342.0000</b>	33		45 mm	120-277Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30342.0000</b>	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>

#### 12 W Warm dimming COB LED





Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Phase-cut	<b>T.30412.0000</b>	18		52 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	<b>V.30341.0000</b>	33		45 mm	120-277Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	<b>D.30341.0000</b>	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>







## Ø 75 mm | Electrical Devices

### Driver/ Alimentazioni





#### 12 W COBLED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30341.0000	25		54 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	T.30412.0000	18		52 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	V.30341.0000	33		45 mm	120-277Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	D.30341.0000	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>





#### 17 W COBLED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30342.0000	25		54 mm	220-240Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	T.30342.0000	22		52 mm	220-240Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	V.30342.0000	33		45 mm	120-277Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	D.30342.0000	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>




#### 24 W COBLED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30344.0000	35		54 mm	220-240Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	M.30023.T000	33		45 mm	220-240Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	V.30343.0000	33		45 mm	120-277Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	D.30344.0000	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>

#### 28 W COBLED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30345.0000	35		54 mm	220-240Vac / 50/60Hz	800	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	T.30345.0000	40		50 mm		800	Min: 1	20 m	
Dimm 1-10V	V.30345.0000	33		45 mm	120-277Vac / 50/60Hz	800	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	D.30345.0000	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	800	Min: 1	20 m	1.5 mm <sup>2</sup>





#### 25 W Warm dimming COBLED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Phase-cut	M.30023.T000	33		45 mm	220-240Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	V.30343.0000	33		45 mm	120-277Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	D.30344.0000	33		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>





## Ø 95 mm | Electrical Devices

### Driver/ Alimentazioni





#### 12 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30341.0000	25		54 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	T.30412.0000	18		52 mm	220-240Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	V.30341.0000	33		45 mm	120-277Vac / 50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	D.30341.0000	36		54 mm	99-264Vac 170-280Vdc / 0.50/60Hz	350	Min: 1	20 m	1.5 mm <sup>2</sup>





#### 17 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30342.0000	25		54 mm	220-240Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	T.30342.0000	22		52 mm	220-240Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	V.30342.0000	33		45 mm	120-277Vac / 50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	D.30342.0000	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	500	Min: 1	20 m	1.5 mm <sup>2</sup>





#### 24 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30344.0000	35		54 mm	220-240Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	M.30023.T000	33		45 mm	220-240Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	V.30343.0000	33		45 mm	120-277Vac / 50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	D.30344.0000	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	700	Min: 1	20 m	1.5 mm <sup>2</sup>




#### 33 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30346.0000	40		54 mm	220-240Vac / 50/60Hz	950	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	T.30346.0000	38		50 mm	220-240Vac / 50/60Hz	950	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	V.30346.0000	33		45 mm	120-277Vac / 50/60Hz	950	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	D.30346.0000	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	950	Min: 1	20 m	1.5 mm <sup>2</sup>

#### 37 W COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
On/Off	0.30347.0000	40		54 mm	220-240Vac / 50/60Hz	1050	Min: 1	20 m	1.5 mm <sup>2</sup>
Phase-cut	T.30347.0000	37		54 mm	220-240Vac / 50/60Hz	1050	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	V.30347.0000	40		54 mm	120-277Vac / 50/60Hz	1050	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	D.30347.0000	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	1050	Min: 1	20 m	1.5 mm <sup>2</sup>

#### 33 W Warm dimming COB LED

Type	Code	W	Size (mm)	Cut-out	Tech. specifications	mA	Connectable fixtures	Max.distance	Cable section
Phase-cut	T.30348.0000	40		45 mm	220-240Vac / 50/60Hz	900	Min: 1	20 m	1.5 mm <sup>2</sup>
Dimm 1-10V	V.30425.0000	45		60 mm	220-240Vac / 50/60Hz	900	Min: 1	20 m	1.5 mm <sup>2</sup>
DALI	D.30346.0000	36		54 mm	198-264Vac 170-280Vdc / 0.50/60Hz	900	Min: 1	20 m	1.5 mm <sup>2</sup>