




DRX1; 1-Circuit Track LED 4° Optic 15W

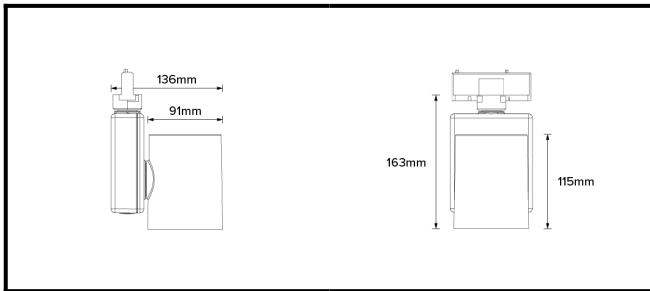

PHYSICAL	CONSTRUCTION MATERIALS:	A380 Aluminium, Glass-filled Polycarbonate, Steel Hook Clamp
	MOUNTING:	1-Circuit Track
	WEIGHT:	1.2 kg
	FINISH:	White RAL9010
	MAX AMBIENT TEMPERATURE:	40°C
	CEILING CLEARANCE:	N/A
	CEILING CUT-OUT:	N/A
CEILING THICKNESS:	N/A	

CONTROL	MOVEMENT TYPE:	Handheld Remote
	DIMMING OPTION:	Handheld Remote


SPECIFICATION DRX1 2700K LED (10W for light source) compact spotlight for 1-Circuit Eutrac with 4° optic. Manufactured from A380 aluminium and glass-filled polycarbonate. Finished in white (RAL 9010). Voltage is 100-240V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 165° movement through the pan axis and +/- 110° through the tilt axis, at a resolution of less than 1° in either axis. Movement and dimming is controlled using a handheld remote. Recording and recalling of scenes as standard.

PART NO.


DRX1.0001
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; White; Movement & Dimming using Handheld Remote

DRX1; 1-Circuit Track LED 4° Optic 15W



Photometry



Cone Diagram

MOVEMENT	MOVEMENT TYPE:	Handheld Remote
	PAN MOVEMENT RANGE:	±165°
	TILT MOVEMENT RANGE:	±110°
	PAN MOVEMENT RESOLUTION:	<1°
	TILT MOVEMENT RESOLUTION:	<1°
	PAN SPEED OF MOVEMENT:	24°/s
	TILT SPEED OF MOVEMENT:	22°/s

LIGHTING	LIGHT SOURCE:	LED
	MIN. DISTANCE FROM TARGET:	N/A
	MODULE LUMEN OUTPUT:	594lm
	ABSOLUTE LUMEN OUTPUT:	540lm
	GLARE MECHANICAL CUT-OFF:	53°
	GLARE COMFORT CUT-OFF:	70°
	COLOUR TEMP:	2700K




ELECTRICAL	VOLTAGE REGION:	100 - 240V 50/60Hz
	IEC PROTECTION CLASS:	Class 2
	LIGHT SOURCE WATTAGE:	10W
	MOVEMENT WATTAGE:	4W
	LUMINAIRE CIRCUIT WATTAGE:	15W

PART NO. DRX1.0001

PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; White; Movement & Dimming using Handheld Remote

DRX1; 1-Circuit Track LED 4° Optic 15W

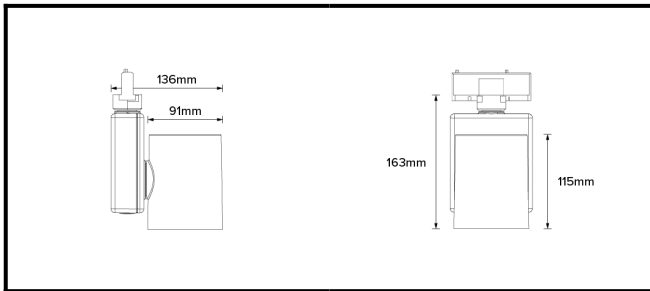

PHYSICAL	CONSTRUCTION MATERIALS:	A380 Aluminium, Glass-filled Polycarbonate
	MOUNTING:	1-Circuit Track
	WEIGHT:	1.2 kg
	FINISH:	White RAL9010
	MAX AMBIENT TEMPERATURE:	40°C
	CEILING CLEARANCE:	N/A
	CEILING CUT-OUT:	N/A
	CEILING THICKNESS:	N/A

CONTROL	MOVEMENT TYPE:	Handheld Remote
	DIMMING OPTION:	DMX


SPECIFICATION DRX1 2700K LED (10W for light source) compact spotlight for 1-Circuit Eutrac with 4° optic. Manufactured from A380 aluminium and glass-filled polycarbonate. Finished in white (RAL 9010). Voltage is 100-240V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 165° movement through the pan axis and +/- 110° through the tilt axis, at a resolution of less than 1° in either axis. Movement is controlled using a handheld remote, and dimming is controlled using DMX. Recording and recalling of scenes as standard.

PART NO.


DRX1.0002
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; White; Movement using Handheld Remote; Dimming using DMX Control

DRX1; 1-Circuit Track LED 4° Optic 15W



Photometry



Cone Diagram

MOVEMENT	MOVEMENT TYPE:	Handheld Remote
	PAN MOVEMENT RANGE:	±165°
	TILT MOVEMENT RANGE:	±110°
	PAN MOVEMENT RESOLUTION:	<1°
	TILT MOVEMENT RESOLUTION:	<1°
	PAN SPEED OF MOVEMENT:	24°/s
	TILT SPEED OF MOVEMENT:	22°/s

LIGHTING	LIGHT SOURCE:	LED
	MIN. DISTANCE FROM TARGET:	N/A
	MODULE LUMEN OUTPUT:	594lm
	ABSOLUTE LUMEN OUTPUT:	540lm
	GLARE MECHANICAL CUT-OFF:	53°
	GLARE COMFORT CUT-OFF:	70°
	COLOUR TEMP:	2700K

ELECTRICAL	VOLTAGE REGION:	100 - 240V 50/60Hz
	IEC PROTECTION CLASS:	Class 2
	LIGHT SOURCE WATTAGE:	10W
	MOVEMENT WATTAGE:	4W
	LUMINAIRE CIRCUIT WATTAGE:	15W




PART NO.

DRX1.0002

PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; White; Movement using Handheld Remote; Dimming using DMX Control

DRX1; 1-Circuit Track LED 4° Optic 15W

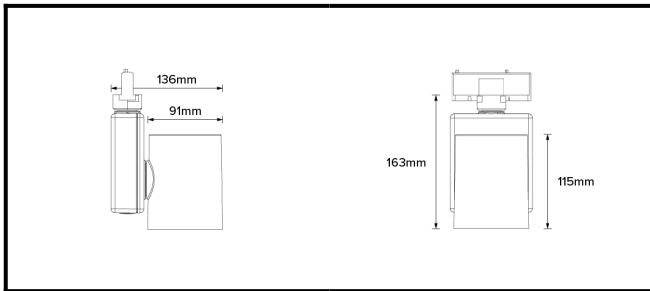

PHYSICAL	CONSTRUCTION MATERIALS:	A380 Aluminium, Glass-filled Polycarbonate
	MOUNTING:	1-Circuit Track
	WEIGHT:	1.2 kg
	FINISH:	White RAL9010
	MAX AMBIENT TEMPERATURE:	40°C
	CEILING CLEARANCE:	N/A
	CEILING CUT-OUT:	N/A
	CEILING THICKNESS:	N/A

CONTROL	MOVEMENT TYPE:	DMX
	DIMMING OPTION:	DMX


SPECIFICATION DRX1 2700K LED (10W for light source) compact spotlight for 1-Circuit Eutrac with 4° optic. Manufactured from A380 aluminium and glass-filled polycarbonate. Finished in white (RAL 9010). Voltage is 100-240V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 165° movement through the pan axis and +/- 110° through the tilt axis, at a resolution of less than 1° in either axis. Movement and dimming is controlled by DMX. Recording and recalling of scenes as standard.

PART NO.


DRX1.0003
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; White; Movement & Dimming using DMX Control only

DRX1; 1-Circuit Track LED 4° Optic 15W



Photometry



Cone Diagram

MOVEMENT	MOVEMENT TYPE:	DMX
	PAN MOVEMENT RANGE:	±165°
	TILT MOVEMENT RANGE:	±110°
	PAN MOVEMENT RESOLUTION:	<1°
	TILT MOVEMENT RESOLUTION:	<1°
	PAN SPEED OF MOVEMENT:	24°/s
	TILT SPEED OF MOVEMENT:	22°/s

LIGHTING	LIGHT SOURCE:	LED
	MIN. DISTANCE FROM TARGET:	N/A
	MODULE LUMEN OUTPUT:	594lm
	ABSOLUTE LUMEN OUTPUT:	540lm
	GLARE MECHANICAL CUT-OFF:	53°
	GLARE COMFORT CUT-OFF:	70°
COLOUR TEMP:	2700K	




ELECTRICAL	VOLTAGE REGION:	100 - 240V 50/60Hz
	IEC PROTECTION CLASS:	Class 2
	LIGHT SOURCE WATTAGE:	10W
	MOVEMENT WATTAGE:	4W
	LUMINAIRE CIRCUIT WATTAGE:	15W

PART NO.

DRX1.0003
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; White; Movement & Dimming using DMX Control only

DRX1; 1-Circuit Track LED 4° Optic 15W

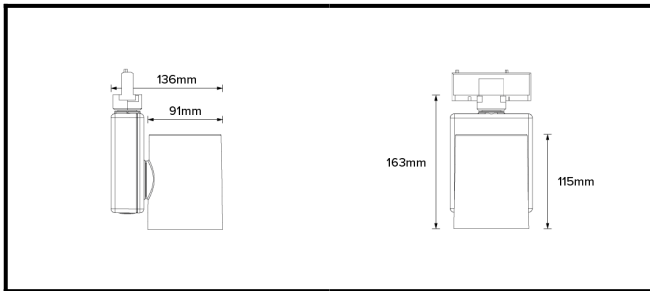

PHYSICAL	CONSTRUCTION MATERIALS:	A380 Aluminium, Glass-filled Polycarbonate
	MOUNTING:	1-Circuit Track
	WEIGHT:	1.2 kg
	FINISH:	White RAL9010
	MAX AMBIENT TEMPERATURE:	40°C
	CEILING CLEARANCE:	N/A
	CEILING CUT-OUT:	N/A
	CEILING THICKNESS:	N/A

CONTROL	MOVEMENT TYPE:	Handheld Remote
	DIMMING OPTION:	DALI Dimming


SPECIFICATION DRX1 2700K LED (10W for light source) compact spotlight for 1-Circuit Eutrac with 4° optic. Manufactured from A380 aluminium and glass-filled polycarbonate. Finished in white (RAL 9010). Voltage is 100-240V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 165° movement through the pan axis and +/- 110° through the tilt axis, at a resolution of less than 1° in either axis. Movement is controlled using a handheld remote, and dimming is controlled using external DALI dimming. Recording and recall of luminaire position (pan and tilt) with handheld remote controller as standard.

PART NO.


DRX1.0004
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; White; Movement using Handheld Remote; Dimming Using External DALI Control

DRX1; 1-Circuit Track LED 4° Optic 15W



Photometry



Cone Diagram

MOVEMENT	MOVEMENT TYPE:	Handheld Remote
	PAN MOVEMENT RANGE:	±165°
	TILT MOVEMENT RANGE:	±110°
	PAN MOVEMENT RESOLUTION:	<1°
	TILT MOVEMENT RESOLUTION:	<1°
	PAN SPEED OF MOVEMENT:	24°/s
	TILT SPEED OF MOVEMENT:	22°/s




LIGHTING	LIGHT SOURCE:	LED
	MIN. DISTANCE FROM TARGET:	N/A
	MODULE LUMEN OUTPUT:	594lm
	ABSOLUTE LUMEN OUTPUT:	540lm
	GLARE MECHANICAL CUT-OFF:	53°
	GLARE COMFORT CUT-OFF:	70°
COLOUR TEMP:	2700K	

ELECTRICAL	VOLTAGE REGION:	100 - 240V 50/60Hz
	IEC PROTECTION CLASS:	Class 2
	LIGHT SOURCE WATTAGE:	10W
	MOVEMENT WATTAGE:	4W
	LUMINAIRE CIRCUIT WATTAGE:	15W

 PART NO. DRX1.0004
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; White; Movement using Handheld Remote; Dimming Using External DALI Control

DRX1; 1-Circuit Track LED 4° Optic 15W

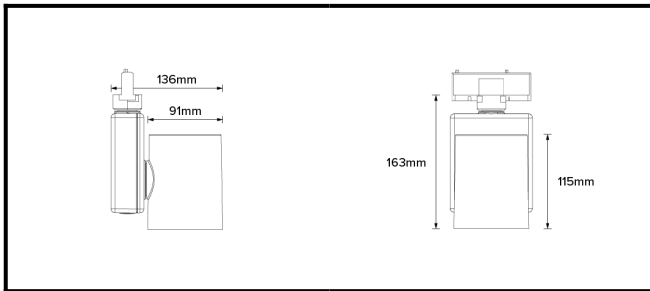

PHYSICAL	CONSTRUCTION MATERIALS:	A380 Aluminium, Glass-filled Polycarbonate
	MOUNTING:	1-Circuit Track
	WEIGHT:	1.2 kg
	FINISH:	White RAL9010
	MAX AMBIENT TEMPERATURE:	40°C
	CEILING CLEARANCE:	N/A
	CEILING CUT-OUT:	N/A
CEILING THICKNESS:	N/A	

CONTROL	MOVEMENT TYPE:	Handheld Remote
	DIMMING OPTION:	1-10V


SPECIFICATION

DRX1 2700K LED (10W for light source) compact spotlight for 1-Circuit Eutrac with 4° optic. Manufactured from A380 aluminium and glass-filled polycarbonate. Finished in white (RAL 9010). Voltage is 100-240V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 165° movement through the pan axis and +/- 110° through the tilt axis, at a resolution of less than 1° in either axis. Movement is controlled using a handheld remote, and dimming is controlled using external 1-10V dimming. Recording and recall of luminaire position (pan and tilt) with handheld remote controller as standard.


PART NO. DRX1.0005

PRODUCT SUMMARY	DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; White; Movement using Handheld Remote; Dimming Using External (1-10V)
------------------------	--

DRX1; 1-Circuit Track LED 4° Optic 15W



Photometry



Cone Diagram

MOVEMENT	MOVEMENT TYPE:	Handheld Remote
	PAN MOVEMENT RANGE:	±165°
	TILT MOVEMENT RANGE:	±110°
	PAN MOVEMENT RESOLUTION:	<1°
	TILT MOVEMENT RESOLUTION:	<1°
	PAN SPEED OF MOVEMENT:	24°/s
	TILT SPEED OF MOVEMENT:	22°/s

LIGHTING	LIGHT SOURCE:	LED
	MIN. DISTANCE FROM TARGET:	N/A
	MODULE LUMEN OUTPUT:	594lm
	ABSOLUTE LUMEN OUTPUT:	540lm
	GLARE MECHANICAL CUT-OFF:	53°
	GLARE COMFORT CUT-OFF:	70°
	COLOUR TEMP:	2700K

ELECTRICAL	VOLTAGE REGION:	100 - 240V 50/60Hz
	IEC PROTECTION CLASS:	Class 2
	LIGHT SOURCE WATTAGE:	10W
	MOVEMENT WATTAGE:	4W
	LUMINAIRE CIRCUIT WATTAGE:	15W




PART NO.

DRX1.0005

PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; White; Movement using Handheld Remote; Dimming Using External (1-10V)

DRX1; 1-Circuit Track LED 4° Optic 15W

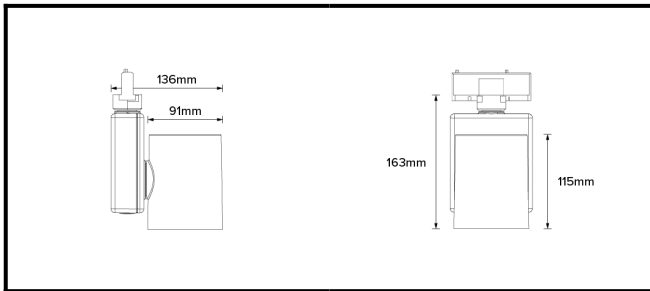

PHYSICAL	CONSTRUCTION MATERIALS:	A380 Aluminium, Glass-filled Polycarbonate
	MOUNTING:	1-Circuit Track
	WEIGHT:	1.2 kg
	FINISH:	Black RAL9005
	MAX AMBIENT TEMPERATURE:	40°C
	CEILING CLEARANCE:	N/A
	CEILING CUT-OUT:	N/A
	CEILING THICKNESS:	N/A

CONTROL	MOVEMENT TYPE:	Handheld Remote
	DIMMING OPTION:	Handheld Remote


SPECIFICATION DRX1 2700K LED (10W for light source) compact spotlight for 1-Circuit Eutrac with 4° optic. Manufactured from A380 aluminium and glass-filled polycarbonate. Finished in black (RAL 9005). Voltage is 100-240V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 165° movement through the pan axis and +/- 110° through the tilt axis, at a resolution of less than 1° in either axis. Movement and dimming is controlled using a handheld remote. Recording and recalling of scenes as standard.

PART NO.


DRX1.0006
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; Black; Movement & Dimming using Handheld Remote

DRX1; 1-Circuit Track LED 4° Optic 15W



Photometry



Cone Diagram

MOVEMENT	MOVEMENT TYPE:	Handheld Remote
	PAN MOVEMENT RANGE:	±165°
	TILT MOVEMENT RANGE:	±110°
	PAN MOVEMENT RESOLUTION:	<1°
	TILT MOVEMENT RESOLUTION:	<1°
	PAN SPEED OF MOVEMENT:	24°/s
	TILT SPEED OF MOVEMENT:	22°/s

LIGHTING	LIGHT SOURCE:	LED
	MIN. DISTANCE FROM TARGET:	N/A
	MODULE LUMEN OUTPUT:	594lm
	ABSOLUTE LUMEN OUTPUT:	540lm
	GLARE MECHANICAL CUT-OFF:	53°
	GLARE COMFORT CUT-OFF:	70°
COLOUR TEMP:	2700K	




ELECTRICAL	VOLTAGE REGION:	100 - 240V 50/60Hz
	IEC PROTECTION CLASS:	Class 2
	LIGHT SOURCE WATTAGE:	10W
	MOVEMENT WATTAGE:	4W
	LUMINAIRE CIRCUIT WATTAGE:	15W

PART NO.

DRX1.0006
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; Black; Movement & Dimming using Handheld Remote

DRX1; 1-Circuit Track LED 4° Optic 15W

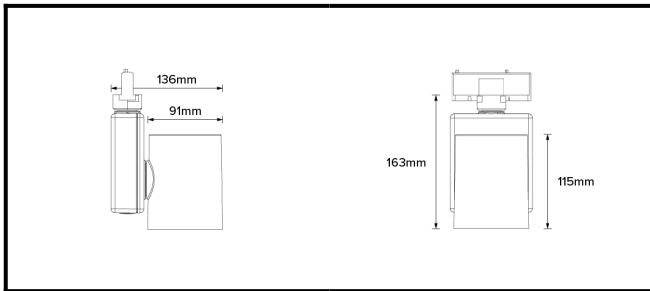

PHYSICAL	CONSTRUCTION MATERIALS:	A380 Aluminium, Glass-filled Polycarbonate
	MOUNTING:	1-Circuit Track
	WEIGHT:	1.2 kg
	FINISH:	Black RAL9005
	MAX AMBIENT TEMPERATURE:	40°C
	CEILING CLEARANCE:	N/A
	CEILING CUT-OUT:	N/A
	CEILING THICKNESS:	N/A

CONTROL	MOVEMENT TYPE:	Handheld Remote
	DIMMING OPTION:	DMX


SPECIFICATION DRX1 2700K LED (10W for light source) compact spotlight for 1-Circuit Eutrac with 4° optic. Manufactured from A380 aluminium and glass-filled polycarbonate. Finished in black (RAL 9005). Voltage is 100-240V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 165° movement through the pan axis and +/- 110° through the tilt axis, at a resolution of less than 1° in either axis. Movement is controlled using a handheld remote, and dimming is controlled using DMX. Recording and recalling of scenes as standard.

PART NO.


DRX1.0007
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; Black; Movement using Handheld Remote; Dimming using DMX Control

DRX1; 1-Circuit Track LED 4° Optic 15W



Photometry



Cone Diagram

MOVEMENT	MOVEMENT TYPE:	Handheld Remote
	PAN MOVEMENT RANGE:	±165°
	TILT MOVEMENT RANGE:	±110°
	PAN MOVEMENT RESOLUTION:	<1°
	TILT MOVEMENT RESOLUTION:	<1°
	PAN SPEED OF MOVEMENT:	24°/s
	TILT SPEED OF MOVEMENT:	22°/s




LIGHTING	LIGHT SOURCE:	LED
	MIN. DISTANCE FROM TARGET:	N/A
	MODULE LUMEN OUTPUT:	594lm
	ABSOLUTE LUMEN OUTPUT:	540lm
	GLARE MECHANICAL CUT-OFF:	53°
	GLARE COMFORT CUT-OFF:	70°
	COLOUR TEMP:	2700K

ELECTRICAL	VOLTAGE REGION:	100 - 240V 50/60Hz
	IEC PROTECTION CLASS:	Class 2
	LIGHT SOURCE WATTAGE:	10W
	MOVEMENT WATTAGE:	4W
	LUMINAIRE CIRCUIT WATTAGE:	15W

 PART NO. **DRX1.0007**
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; Black; Movement using Handheld Remote; Dimming using DMX Control

DRX1; 1-Circuit Track LED 4° Optic 15W

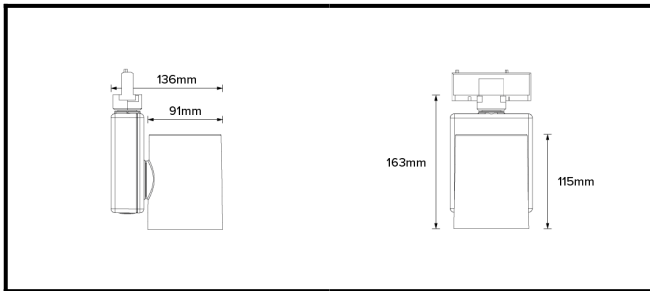

PHYSICAL	CONSTRUCTION MATERIALS:	A380 Aluminium, Glass-filled Polycarbonate
	MOUNTING:	1-Circuit Track
	WEIGHT:	1.2 kg
	FINISH:	Black RAL9005
	MAX AMBIENT TEMPERATURE:	40°C
	CEILING CLEARANCE:	N/A
	CEILING CUT-OUT:	N/A
	CEILING THICKNESS:	N/A

CONTROL	MOVEMENT TYPE:	DMX
	DIMMING OPTION:	DMX


SPECIFICATION DRX1 2700K LED (10W for light source) compact spotlight for 1-Circuit Eutrac with 4° optic. Manufactured from A380 aluminium and glass-filled polycarbonate. Finished in black (RAL 9005). Voltage is 100-240V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 165° movement through the pan axis and +/- 110° through the tilt axis, at a resolution of less than 1° in either axis. Movement and dimming is controlled by DMX. Recording and recalling of scenes as standard.

PART NO.


DRX1.0008
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; Black; Movement & Dimming using DMX Control only

DRX1; 1-Circuit Track LED 4° Optic 15W



Photometry



Cone Diagram

MOVEMENT	MOVEMENT TYPE:	DMX
	PAN MOVEMENT RANGE:	±165°
	TILT MOVEMENT RANGE:	±110°
	PAN MOVEMENT RESOLUTION:	<1°
	TILT MOVEMENT RESOLUTION:	<1°
	PAN SPEED OF MOVEMENT:	24°/s
	TILT SPEED OF MOVEMENT:	22°/s




LIGHTING	LIGHT SOURCE:	LED
	MIN. DISTANCE FROM TARGET:	N/A
	MODULE LUMEN OUTPUT:	594lm
	ABSOLUTE LUMEN OUTPUT:	540lm
	GLARE MECHANICAL CUT-OFF:	53°
	GLARE COMFORT CUT-OFF:	70°
	COLOUR TEMP:	2700K

ELECTRICAL	VOLTAGE REGION:	100 - 240V 50/60Hz
	IEC PROTECTION CLASS:	Class 2
	LIGHT SOURCE WATTAGE:	10W
	MOVEMENT WATTAGE:	4W
	LUMINAIRE CIRCUIT WATTAGE:	15W

 PART NO. DRX1.0008

PRODUCT SUMMARY DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; Black; Movement & Dimming using DMX Control only

DRX1; 1-Circuit Track LED 4° Optic 15W

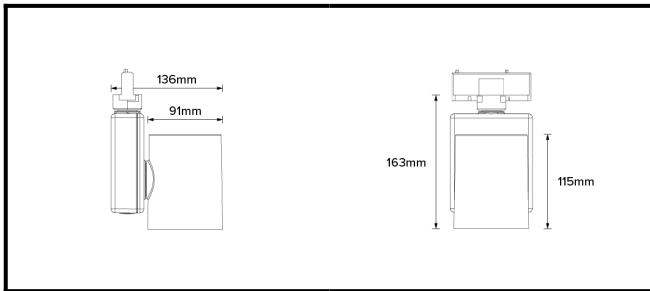

PHYSICAL	CONSTRUCTION MATERIALS:	A380 Aluminium, Glass-filled Polycarbonate
	MOUNTING:	1-Circuit Track
	WEIGHT:	1.2 kg
	FINISH:	Black RAL9005
	MAX AMBIENT TEMPERATURE:	40°C
	CEILING CLEARANCE:	N/A
	CEILING CUT-OUT:	N/A
CEILING THICKNESS:	N/A	

CONTROL	MOVEMENT TYPE:	Handheld Remote
	DIMMING OPTION:	DALI Dimming


SPECIFICATION DRX1 2700K LED (10W for light source) compact spotlight for 1-Circuit Eutrac with 4° optic. Manufactured from A380 aluminium and glass-filled polycarbonate. Finished in black (RAL 9005). Voltage is 100-240V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 165° movement through the pan axis and +/- 110° through the tilt axis, at a resolution of less than 1° in either axis. Movement is controlled using a handheld remote, and dimming is controlled using external DALI dimming. Recording and recall of luminaire position (pan and tilt) with handheld remote controller as standard.

PART NO.


DRX1.0009
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; Black; Movement using Handheld Remote; Dimming Using External DALI Control

DRX1; 1-Circuit Track LED 4° Optic 15W



Photometry



Cone Diagram

MOVEMENT	MOVEMENT TYPE:	Handheld Remote
	PAN MOVEMENT RANGE:	±165°
	TILT MOVEMENT RANGE:	±110°
	PAN MOVEMENT RESOLUTION:	<1°
	TILT MOVEMENT RESOLUTION:	<1°
	PAN SPEED OF MOVEMENT:	24°/s
	TILT SPEED OF MOVEMENT:	22°/s




LIGHTING	LIGHT SOURCE:	LED
	MIN. DISTANCE FROM TARGET:	N/A
	MODULE LUMEN OUTPUT:	594lm
	ABSOLUTE LUMEN OUTPUT:	540lm
	GLARE MECHANICAL CUT-OFF:	53°
	GLARE COMFORT CUT-OFF:	70°
COLOUR TEMP:	2700K	

ELECTRICAL	VOLTAGE REGION:	100 - 240V 50/60Hz
	IEC PROTECTION CLASS:	Class 2
	LIGHT SOURCE WATTAGE:	10W
	MOVEMENT WATTAGE:	4W
	LUMINAIRE CIRCUIT WATTAGE:	15W

 PART NO. DRX1.0009
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; Black; Movement using Handheld Remote; Dimming Using External DALI Control

DRX1; 1-Circuit Track LED 4° Optic 15W

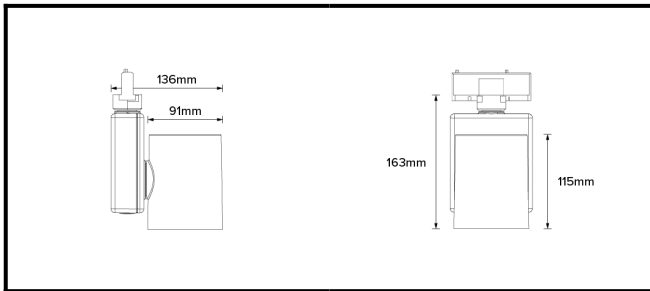

PHYSICAL	CONSTRUCTION MATERIALS:	A380 Aluminium, Glass-filled Polycarbonate
	MOUNTING:	1-Circuit Track
	WEIGHT:	1.2 kg
	FINISH:	Black RAL9005
	MAX AMBIENT TEMPERATURE:	40°C
	CEILING CLEARANCE:	N/A
	CEILING CUT-OUT:	N/A
	CEILING THICKNESS:	N/A

CONTROL	MOVEMENT TYPE:	Handheld Remote
	DIMMING OPTION:	1-10V


SPECIFICATION DRX1 2700K LED (10W for light source) compact spotlight for 1-Circuit Eutrac with 4° optic. Manufactured from A380 aluminium and glass-filled polycarbonate. Finished in black (RAL 9005). Voltage is 100-240V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 165° movement through the pan axis and +/- 110° through the tilt axis, at a resolution of less than 1° in either axis. Movement is controlled using a handheld remote, and dimming is controlled using external 1-10V dimming. Recording and recall of luminaire position (pan and tilt) with handheld remote controller as standard.

PART NO.


DRX1.0010
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; Black; Movement using Handheld Remote; Dimming Using External (1-10V)

DRX1; 1-Circuit Track LED 4° Optic 15W



Photometry



Cone Diagram

MOVEMENT	MOVEMENT TYPE:	Handheld Remote
	PAN MOVEMENT RANGE:	±165°
	TILT MOVEMENT RANGE:	±110°
	PAN MOVEMENT RESOLUTION:	<1°
	TILT MOVEMENT RESOLUTION:	<1°
	PAN SPEED OF MOVEMENT:	24°/s
	TILT SPEED OF MOVEMENT:	22°/s




LIGHTING	LIGHT SOURCE:	LED
	MIN. DISTANCE FROM TARGET:	N/A
	MODULE LUMEN OUTPUT:	594lm
	ABSOLUTE LUMEN OUTPUT:	540lm
	GLARE MECHANICAL CUT-OFF:	53°
	GLARE COMFORT CUT-OFF:	70°
	COLOUR TEMP:	2700K

ELECTRICAL	VOLTAGE REGION:	100 - 240V 50/60Hz
	IEC PROTECTION CLASS:	Class 2
	LIGHT SOURCE WATTAGE:	10W
	MOVEMENT WATTAGE:	4W
	LUMINAIRE CIRCUIT WATTAGE:	15W

 PART NO. DRX1.0010
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 2700K 90+CRI LED 10W; Black; Movement using Handheld Remote; Dimming Using External (1-10V)

DRX1; 1-Circuit Track LED 4° Optic 15W

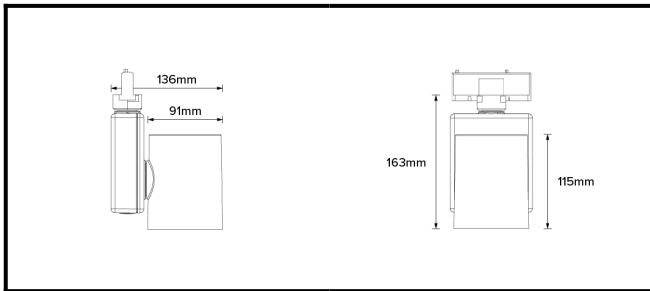

PHYSICAL	CONSTRUCTION MATERIALS:	A380 Aluminium, Glass-filled Polycarbonate
	MOUNTING:	1-Circuit Track
	WEIGHT:	1.2 kg
	FINISH:	White RAL9010
	MAX AMBIENT TEMPERATURE:	40°C
	CEILING CLEARANCE:	N/A
	CEILING CUT-OUT:	N/A
	CEILING THICKNESS:	N/A

CONTROL	MOVEMENT TYPE:	Handheld Remote
	DIMMING OPTION:	Handheld Remote


SPECIFICATION DRX1 3000K LED (10W for light source) compact spotlight for 1-Circuit Eutrac with 4° optic. Manufactured from A380 aluminium and glass-filled polycarbonate. Finished in white (RAL 9010). Voltage is 100-240V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 165° movement through the pan axis and +/- 110° through the tilt axis, at a resolution of less than 1° in either axis. Movement and dimming is controlled using a handheld remote. Recording and recalling of scenes as standard.

PART NO.


DRX1.0011
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 3000K 90+CRI LED 10W; White; Movement & Dimming using Handheld Remote

DRX1; 1-Circuit Track LED 4° Optic 15W



Photometry



Cone Diagram

MOVEMENT	MOVEMENT TYPE:	Handheld Remote
	PAN MOVEMENT RANGE:	±165°
	TILT MOVEMENT RANGE:	±110°
	PAN MOVEMENT RESOLUTION:	<1°
	TILT MOVEMENT RESOLUTION:	<1°
	PAN SPEED OF MOVEMENT:	24°/s
	TILT SPEED OF MOVEMENT:	22°/s

LIGHTING	LIGHT SOURCE:	LED
	MIN. DISTANCE FROM TARGET:	N/A
	MODULE LUMEN OUTPUT:	594lm
	ABSOLUTE LUMEN OUTPUT:	540lm
	GLARE MECHANICAL CUT-OFF:	53°
	GLARE COMFORT CUT-OFF:	70°
COLOUR TEMP:	3000K	

ELECTRICAL	VOLTAGE REGION:	100 - 240V 50/60Hz
	IEC PROTECTION CLASS:	Class 2
	LIGHT SOURCE WATTAGE:	10W
	MOVEMENT WATTAGE:	4W
	LUMINAIRE CIRCUIT WATTAGE:	15W




PART NO.

DRX1.0011

PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 3000K 90+CRI LED 10W; White; Movement & Dimming using Handheld Remote

DRX1; 1-Circuit Track LED 4° Optic 15W

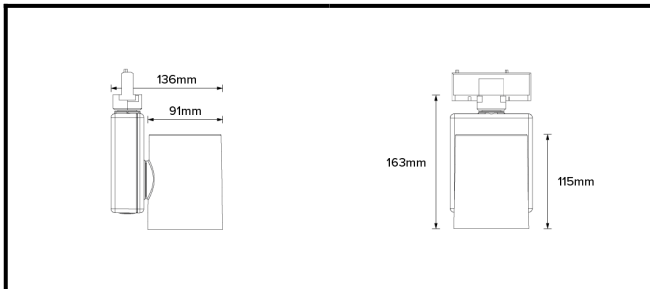

PHYSICAL	CONSTRUCTION MATERIALS:	A380 Aluminium, Glass-filled Polycarbonate
	MOUNTING:	1-Circuit Track
	WEIGHT:	1.2 kg
	FINISH:	White RAL9010
	MAX AMBIENT TEMPERATURE:	40°C
	CEILING CLEARANCE:	N/A
	CEILING CUT-OUT:	N/A
	CEILING THICKNESS:	N/A

CONTROL	MOVEMENT TYPE:	Handheld Remote
	DIMMING OPTION:	DMX


SPECIFICATION DRX1 3000K LED (10W for light source) compact spotlight for 1-Circuit Eutrac with 4° optic. Manufactured from A380 aluminium and glass-filled polycarbonate. Finished in white (RAL 9010). Voltage is 100-240V 50/60HZ. Luminaire has high-performance colour rendering of 90+ CRI. Luminaire can be rotated, with +/- 165° movement through the pan axis and +/- 110° through the tilt axis, at a resolution of less than 1° in either axis. Movement is controlled using a handheld remote, and dimming is controlled using DMX. Recording and recalling of scenes as standard.

PART NO.


DRX1.0012
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 3000K 90+CRI LED 10W; White; Movement using Handheld Remote; Dimming using DMX Control

DRX1; 1-Circuit Track LED 4° Optic 15W



Photometry



Cone Diagram

MOVEMENT	MOVEMENT TYPE:	Handheld Remote
	PAN MOVEMENT RANGE:	±165°
	TILT MOVEMENT RANGE:	±110°
	PAN MOVEMENT RESOLUTION:	<1°
	TILT MOVEMENT RESOLUTION:	<1°
	PAN SPEED OF MOVEMENT:	24°/s
	TILT SPEED OF MOVEMENT:	22°/s

LIGHTING	LIGHT SOURCE:	LED
	MIN. DISTANCE FROM TARGET:	N/A
	MODULE LUMEN OUTPUT:	594lm
	ABSOLUTE LUMEN OUTPUT:	540lm
	GLARE MECHANICAL CUT-OFF:	53°
	GLARE COMFORT CUT-OFF:	70°
COLOUR TEMP:	3000K	

ELECTRICAL	VOLTAGE REGION:	100 - 240V 50/60Hz
	IEC PROTECTION CLASS:	Class 2
	LIGHT SOURCE WATTAGE:	10W
	MOVEMENT WATTAGE:	4W
	LUMINAIRE CIRCUIT WATTAGE:	15W

 PART NO. DRX1.0012
PRODUCT SUMMARY

DRX1 Spotlight; 100-240V 50/60Hz; 1~ Eutrac; 4° Optic; 3000K 90+CRI LED 10W; White; Movement using Handheld Remote; Dimming using DMX Control