

Flexible outdoor luminaire with grazing optics

## LIGHT OUTPUT

CCT/LED Colour (K)	2700
CRI	80
Luminaire Lumens	190
Optical Data/Beam Angle (°)	45x20
LED Binning	CREE Z BIN

## ELECTRICAL

Watts per metre (W/m)	15
Input Voltage	24 VDC (23V min, 25V max)
Connection Type	JST JWPF IP67
Maximum Chain Length (mm)	4800
Approx. Power Consumption (W)	3
Dimmable	Yes
Max Luminaire Length (mm)	1039

## PHYSICAL & ENVIRONMENTAL

Finish	White PU Resin
Length (mm)	199
Ambient Storage Temperature (°C)	-30 to +85
Ambient Operating Temperature (°C)	-10 to +50
IP Rating	IP67
IK Rating	03
LED Pitch (mm)	35
Cable Exit/Entry	Bottom Exit
Weight (g)	66

## PRODUCT FEATURES

- Flexible polyurethane resin luminaire
- Dimmable via remote LED driver
- CREE LED inside.
- Outdoor rated to IP67 rating
- Z BIN LED binning
- 24 V input for SELV compliance
- 150mm / 5.90" bend radius




## SPECIFICATION TEXT

Flexi-Light is a polyurethane encapsulated LED flexible luminaire in a small cross-section that allows for bending in the top & side direction, making it ideal for challenging spaces and unique applications such as columns and curved facades.

The luminaire is designed to clip in place with stainless steel fixing clips.

23.7 x 13.25 / 0.93" x 0.52" cross-section.

## DIMENSIONS

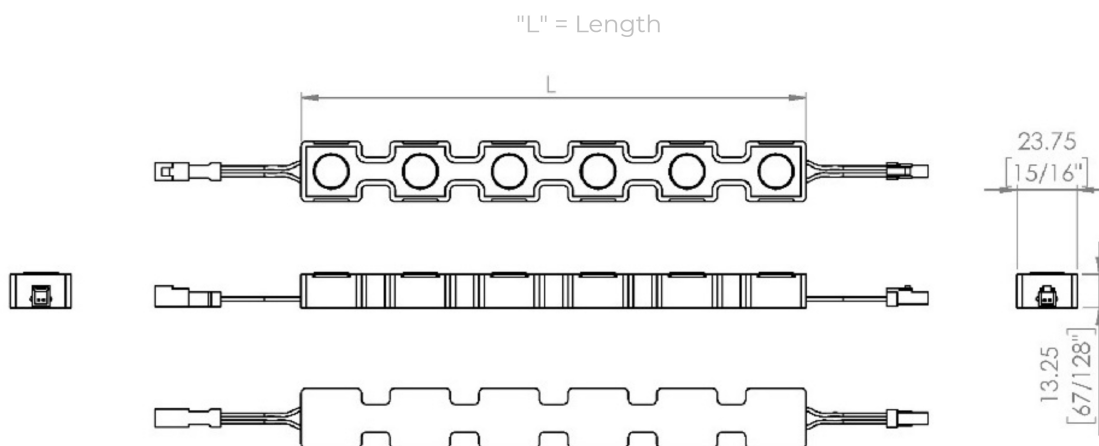

PART NUMBER: VEX-FLEXI-LIGHT-TIR - 2700K - 199 - 15W - IP67 - 45x20

Provided data are typical values. Due to tolerances of the production process, figures for light output, electrical data etc can vary up to 10%. The Tc-point must be measured in thermal equilibrium in accordance with IEC EN 60598-1.