



Indoor | Recessed luminaires | Yori Recessed Square



**CUT  
OUT**  
-----  
136mm

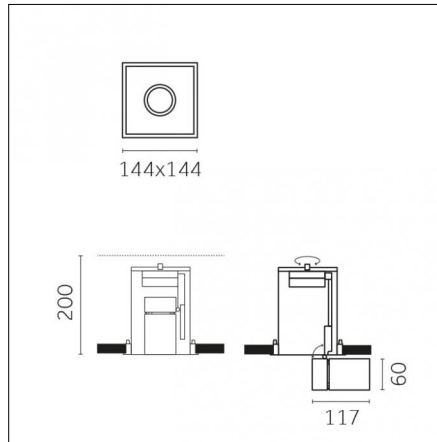

Narrow 13°

12

IP20



Risk 1

850°



### Code X.GM62B.HC12

#### Light source features

**Number of light sources:** 1

**Source type:** LED HC

**Watt:** 9W

**Lm:** 960lm

**Lm/W:** 107lm/W

**Kelvin/CRI:** 3000K / >98

**SDCM/L90 B10:** < 2 / 50000

**Fixture total output:** 797 lm

**Fixture efficacy:** 77 lm/W

**Imax:** 10201 cd

#### Electrical features

**Driver included:** NO

**Driver type:** no driver included

**Isolation class:** Class III

#### Optical features

**Beam angle:** 13°

**Optical type, adjustability:** Adjustable

**Interchangeable optic (IOS):** YES

#### Physical features

**Material:** Die-cast aluminium

**Mounting:** Recessed

**Fixing:** Ceiling

**Adjustability:** 356° horizontal axis 90° vertical axis

**Finishing:** Embossed matt white (Standard)

**Weight:** 0.9Kg



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

#### Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy  
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net  
contact@reggiani.net

## Photometries

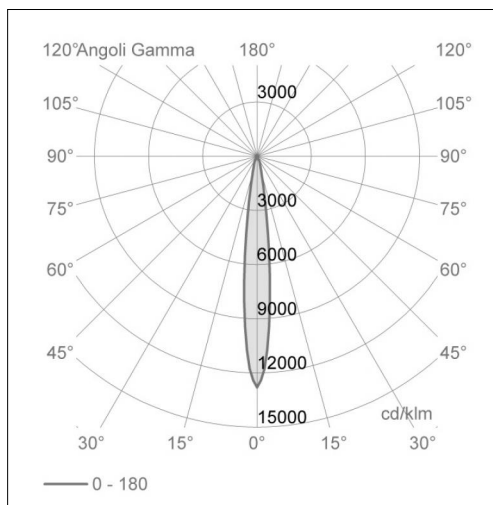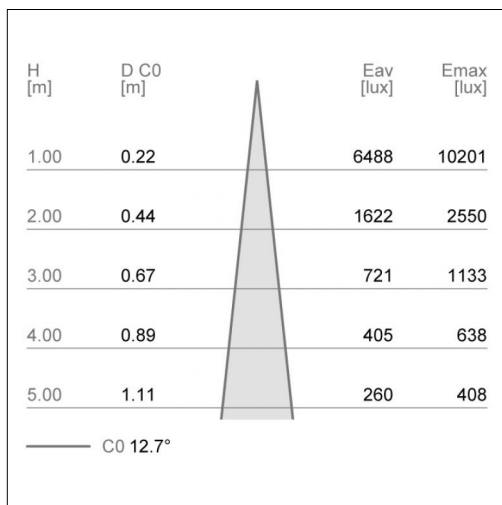

X\_GM62B\_HC\_12.ies


X\_GM62B\_HC\_12.LDT

## Specifications text

**YORI**  
Track, channel, recessed and surface mounting fixture. Symmetrical output. Available for LED and metal halide lamps. Die-cast aluminium body. Interchangeable IOS Ø 50mm (LL1) and Ø 80mm (LL2) reflectors in polycarbonate stabilised up to 140° with highly reflective metal coating - exclusive anti-scratch treatment with surface vitrification for LED lamps. Interchangeable IOS Ø 80mm reflectors in 99.99% pure aluminium, with bayonet fitting for metal halide lamps. Anti-static polycarbonate protective screen with a high transmission index (97%); transparent for very narrow light beams, satin for narrow, medium and wide beams and satin/prismatic for the Mira version; anti-yellowing, stabilised against UV rays, resistant to 850° incandescent wire test, self-extinguishing V0; tempered protective glass for IOS reflectors for metal halide lamps Spot adjustable 0° to 90° vertically and 356° horizontally; integrated plastic no-glare screen; recessed optics for improved visual comfort; mounts to false ceilings with the innovative ClikFix one-way spring system (for recessed, semi-recessed and surface mounted versions); drilled bezel for fine mortaring with 0.7 mm trimless bezel thickness for perfect plastering (recessed version); special perforated steel panel maximises heat dispersal outwards (recessed version); vertical slide for moving the luminaire outwards (recessed version); grub screw for locking the adjustment (recessed version); mechanical/electrical connector with m/f connectors (channel version); up to 10 units can be connected in line with a single power supply (channel version); articulated boom for orienting the fixture (for coves, false ceiling and surround versions); available as pre-assembled KIT version with 2, 3 and 4 fixtures for channel, surface and trimless mounting. Anti-yellowing epoxy powder coating, stabilised against UV rays. Product available with the following finishes: matt embossed white 12, matt embossed black 31. Passive heat dissipation via optimised fixture casing construction, which uses the heat conductivity of the metal and convective currents. Available with LED ON/OFF driver, DIMM 1-10V, PHASE CUTTING and DALI 220/240V VAC 50/60 Hz. Electronic driver for LED lamps, electronic power supply for metal halide lamps. Driver/power supply included in package. Isolation class II and III. IP20. The product can be equipped with: cross grille, no-glare honeycomb grille and UV, IR, dichroic and selective filters for food applications. Emergency unit (3 hour) available as accessory equipment. Fixture built in compliance with Standard EN 60598-1 and amendments and EC Directives 2006/95/CE (low voltage), 2004/108/CE (EMC), 2009/125/CE (Ecodesign), 2002/96/CE (RAEE), 2011/65/CE (RoHS).

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

## Optics




**Code 0.35145.0000 - Ø60mm performance optic 13° - LED**

Finishing:  
Description:



Narrow 13°




**Code 0.35146.0000 - Ø60mm performance optic 24° - LED**

Finishing:  
Description:



Medium 24°




**Code 0.35147.0000 - Ø60mm performance optic 39° - LED**

Finishing:  
Description:




Medium-wide 38°

## Driver



### Code 0.30021.0000 - Driver

Type: On-Off  
Watt: 10W - AC Input: 220-240Vac - mA:260mA  
Description:




### Code D.30021.0000 - Driver

Type: DALI  
Watt: 33W - AC Input: 220-240Vac - mA:260mA  
Description:



### Code T.30021.0000 - Driver


Type: PHASE CUT  
Watt: 10W - AC Input: 220-240Vac - mA:260mA  
Description:



### Code V.30021.0000 - Driver


Type: DIMM 1-10V  
Watt: 33W - AC Input: 220-240Vac - mA:260mA  
Description:

## Accessories




**Code 0.26403.004A - Red glass filter 1 mm**

Type: Optical  
Finishing: Red




**Code 0.26403.005A - Green glass filter 1 mm**

Type: Optical  
Finishing: Green




**Code 0.26403.006A - Blue glass filter 1 mm**

Type: Optical  
Finishing: Blue




**Code 0.26403.007A - Pink glass filter 1 mm**

Type: Optical  
Finishing: Pink



**Code 0.26403.008A - Yellow glass filter 1 mm**

Type: Optical  
Finishing: Yellow



**Code 0.26403.009A - Orange glass filter 1 mm**



Type: Optical  
Finishing: Orange

## Accessories





### Code 0.26411.0000 - Colored Gel Slides (2 pieces)

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




### Code 0.26419.0000 - Selective filter 2700K - 2500K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26427.0000 - Selective filter 2700K - 2200K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26435.0000 - Selective filter 2700K - 2000K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26443.0000 - Honeycomb dense texture


Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26451.0000 - Honeycomb wide texture

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)


## Accessories



### Code 0.26463.0000 - Opal lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26471.0000 - Diffusive lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26481.0000 - Cross blade louver

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26493.0000 - Ribbed glass

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26497.0012 - Cone 45 ° wall washer

Type: Optical

Finishing: Embossed matt white (Standard)





### Code 0.26497.0031 - Cone 45 ° wall washer

Type: Optical

Finishing: Embossed matt black (Standard)



## Accessories



**Code 0.26560.0000 - Selective filter 3000K-2700K**

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



**Code 0.26568.0000 - Selective filter 3000K-3600K**

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




**Code 0.26576.0000 - Selective filter 3000K-4000K**

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Indoor | Recessed luminaires | Yori Recessed Square

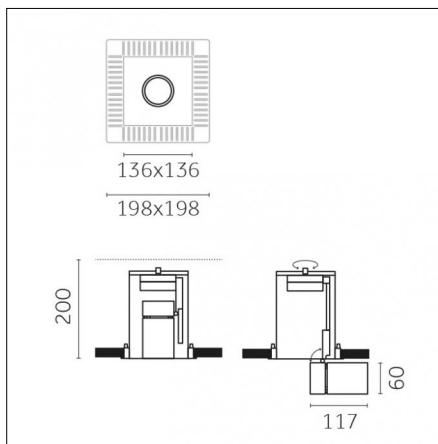

**CUT  
OUT**  
-----  
136mm



Narrow 13°

12

IP20



Risk 1

850°



### Code X.HM62B.HC12

#### Light source features

**Number of light sources:** 1

**Source type:** LED HC

**Watt:** 9W

**Lm:** 960lm

**Lm/W:** 107lm/W

**Kelvin/CRI:** 3000K / >98

**SDCM/L90 B10:** < 2 / 50000

**Fixture total output:** 797 lm

**Fixture efficacy:** 77 lm/W

**Imax:** 10201 cd

#### Electrical features

**Driver included:** NO

**Driver type:** no driver included

**Isolation class:** Class III

#### Optical features

**Beam angle:** 13°

**Optical type, adjustability:** Adjustable

**Interchangeable optic (IOS):** YES

#### Physical features

**Material:** Die-cast aluminium

**Mounting:** Recessed

**Fixing:** Ceiling

**Adjustability:** 356° horizontal axis 90° vertical axis

**Finishing:** Embossed matt white (Standard)

**Weight:** 0.9Kg



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

#### Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy  
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net  
contact@reggiani.net

## Photometries

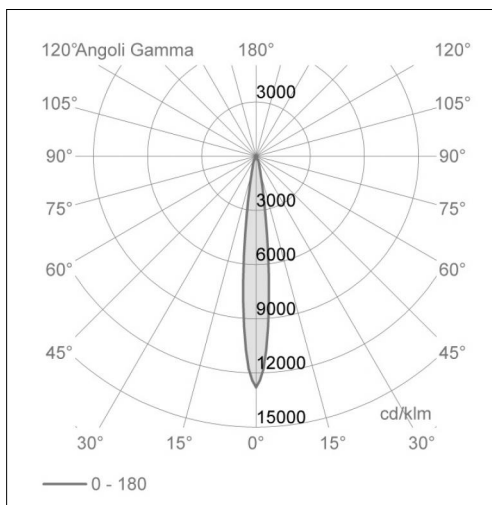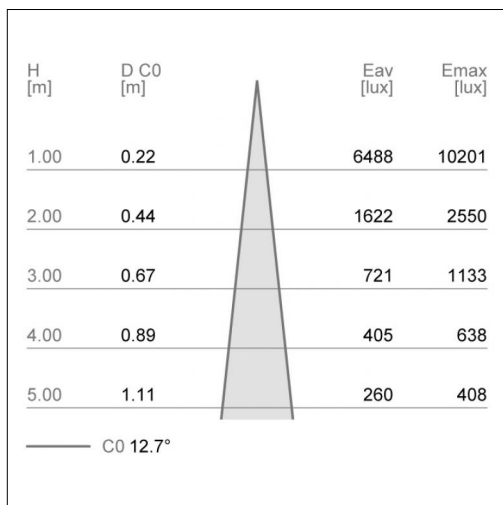

X\_HM62B\_HC\_12.ies


X\_HM62B\_HC\_12.LDT

## Specifications text

**YORI**  
Track, channel, recessed and surface mounting fixture. Symmetrical output. Available for LED and metal halide lamps. Die-cast aluminium body. Interchangeable IOS Ø 50mm (LL1) and Ø 80mm (LL2) reflectors in polycarbonate stabilised up to 140° with highly reflective metal coating - exclusive anti-scratch treatment with surface vitrification for LED lamps. Interchangeable IOS Ø 80mm reflectors in 99.99% pure aluminium, with bayonet fitting for metal halide lamps. Anti-static polycarbonate protective screen with a high transmission index (97%); transparent for very narrow light beams, satin for narrow, medium and wide beams and satin/prismatic for the Mira version; anti-yellowing, stabilised against UV rays, resistant to 850° incandescent wire test, self-extinguishing V0; tempered protective glass for IOS reflectors for metal halide lamps Spot adjustable 0° to 90° vertically and 356° horizontally; integrated plastic no-glare screen; recessed optics for improved visual comfort; mounts to false ceilings with the innovative ClikFix one-way spring system (for recessed, semi-recessed and surface mounted versions); drilled bezel for fine mortaring with 0.7 mm trimless bezel thickness for perfect plastering (recessed version); special perforated steel panel maximises heat dispersal outwards (recessed version); vertical slide for moving the luminaire outwards (recessed version); grub screw for locking the adjustment (recessed version); mechanical/electrical connector with m/f connectors (channel version); up to 10 units can be connected in line with a single power supply (channel version); articulated boom for orienting the fixture (for coves, false ceiling and surround versions); available as pre-assembled KIT version with 2, 3 and 4 fixtures for channel, surface and trimless mounting. Anti-yellowing epoxy powder coating, stabilised against UV rays. Product available with the following finishes: matt embossed white 12, matt embossed black 31. Passive heat dissipation via optimised fixture casing construction, which uses the heat conductivity of the metal and convective currents. Available with LED ON/OFF driver, DIMM 1-10V, PHASE CUTTING and DALI 220/240V VAC 50/60 Hz. Electronic driver for LED lamps, electronic power supply for metal halide lamps. Driver/power supply included in package. Isolation class II and III. IP20. The product can be equipped with: cross grille, no-glare honeycomb grille and UV, IR, dichroic and selective filters for food applications. Emergency unit (3 hour) available as accessory equipment. Fixture built in compliance with Standard EN 60598-1 and amendments and EC Directives 2006/95/CE (low voltage), 2004/108/CE (EMC), 2009/125/CE (Ecodesign), 2002/96/CE (RAEE), 2011/65/CE (RoHS).

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

## Optics




**Code 0.35145.0000 - Ø60mm performance optic 13° - LED**

Finishing:  
Description:



Narrow 13°




**Code 0.35146.0000 - Ø60mm performance optic 24° - LED**

Finishing:  
Description:



Medium 24°




**Code 0.35147.0000 - Ø60mm performance optic 39° - LED**

Finishing:  
Description:




Medium-wide 38°

## Driver



### Code 0.30021.0000 - Driver

Type: On-Off  
Watt: 10W - AC Input: 220-240Vac - mA:260mA  
Description:




### Code D.30021.0000 - Driver

Type: DALI  
Watt: 33W - AC Input: 220-240Vac - mA:260mA  
Description:



### Code T.30021.0000 - Driver


Type: PHASE CUT  
Watt: 10W - AC Input: 220-240Vac - mA:260mA  
Description:



### Code V.30021.0000 - Driver


Type: DIMM 1-10V  
Watt: 33W - AC Input: 220-240Vac - mA:260mA  
Description:

## Accessories




**Code 0.26403.004A - Red glass filter 1 mm**

Type: Optical  
Finishing: Red




**Code 0.26403.005A - Green glass filter 1 mm**

Type: Optical  
Finishing: Green




**Code 0.26403.006A - Blue glass filter 1 mm**

Type: Optical  
Finishing: Blue




**Code 0.26403.007A - Pink glass filter 1 mm**

Type: Optical  
Finishing: Pink



**Code 0.26403.008A - Yellow glass filter 1 mm**

Type: Optical  
Finishing: Yellow



**Code 0.26403.009A - Orange glass filter 1 mm**



Type: Optical  
Finishing: Orange

## Accessories





### Code 0.26411.0000 - Colored Gel Slides (2 pieces)

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




### Code 0.26419.0000 - Selective filter 2700K - 2500K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




### Code 0.26427.0000 - Selective filter 2700K - 2200K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26435.0000 - Selective filter 2700K - 2000K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26443.0000 - Honeycomb dense texture


Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26451.0000 - Honeycomb wide texture

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)


## Accessories



### Code 0.26463.0000 - Opal lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26471.0000 - Diffusive lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26481.0000 - Cross blade louver

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26493.0000 - Ribbed glass

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26497.0012 - Cone 45 ° wall washer

Type: Optical

Finishing: Embossed matt white (Standard)





### Code 0.26497.0031 - Cone 45 ° wall washer

Type: Optical

Finishing: Embossed matt black (Standard)



## Accessories



**Code 0.26560.0000 - Selective filter 3000K-2700K**

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



**Code 0.26568.0000 - Selective filter 3000K-3600K**

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)





**Code 0.26576.0000 - Selective filter 3000K-4000K**

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Indoor | Recessed luminaires | Yori Recessed Square

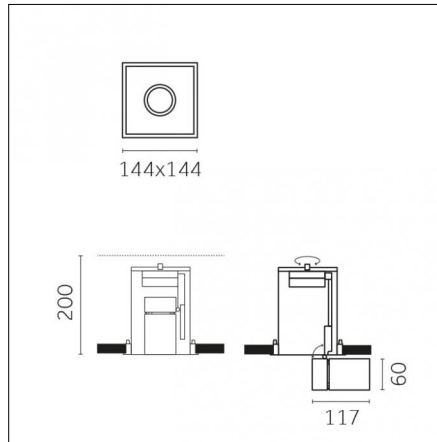

**CUT  
OUT**  
-----  
136mm



Narrow 12°

12

IP20



Risk 1

850°



### Code X.GM52B.HC12

#### Light source features

**Number of light sources:** 1

**Source type:** LED HC

**Watt:** 9W

**Lm:** 960lm

**Lm/W:** 107lm/W

**Kelvin/CRI:** 3000K / >98

**SDCM/L90 B10:** < 2 / 50000

**Fixture total output:** 787 lm

**Fixture efficacy:** 76 lm/W

**Imax:** 12440 cd

#### Electrical features

**Driver included:** NO

**Driver type:** no driver included

**Isolation class:** Class III

#### Optical features

**Beam angle:** 12°

**Optical type, adjustability:** Adjustable

**Interchangeable optic (IOS):** YES

#### Physical features

**Material:** Die-cast aluminium

**Mounting:** Recessed

**Fixing:** Ceiling

**Adjustability:** 356° horizontal axis 90° vertical axis

**Finishing:** Embossed matt white (Standard)

**Weight:** 0.9Kg



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

#### Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy  
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net  
contact@reggiani.net

## Photometries

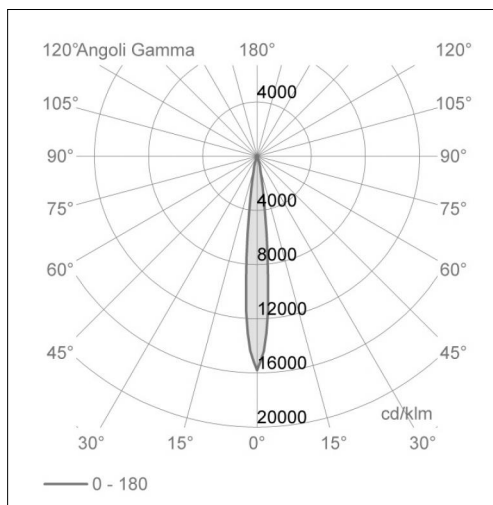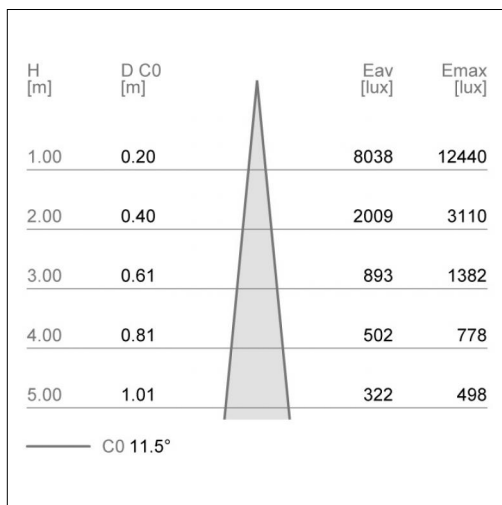

X\_GM52B\_HC\_12.ies


X\_GM52B\_HC\_12.LDT

## Specifications text

**YORI**  
Track, channel, recessed and surface mounting fixture. Symmetrical output. Available for LED and metal halide lamps. Die-cast aluminium body. Interchangeable IOS Ø 50mm (LL1) and Ø 80mm (LL2) reflectors in polycarbonate stabilised up to 140° with highly reflective metal coating - exclusive anti-scratch treatment with surface vitrification for LED lamps. Interchangeable IOS Ø 80mm reflectors in 99.99% pure aluminium, with bayonet fitting for metal halide lamps. Anti-static polycarbonate protective screen with a high transmission index (97%); transparent for very narrow light beams, satin for narrow, medium and wide beams and satin/prismatic for the Mira version; anti-yellowing, stabilised against UV rays, resistant to 850° incandescent wire test, self-extinguishing V0; tempered protective glass for IOS reflectors for metal halide lamps Spot adjustable 0° to 90° vertically and 356° horizontally; integrated plastic no-glare screen; recessed optics for improved visual comfort; mounts to false ceilings with the innovative ClikFix one-way spring system (for recessed, semi-recessed and surface mounted versions); drilled bezel for fine mortaring with 0.7 mm trimless bezel thickness for perfect plastering (recessed version); special perforated steel panel maximises heat dispersal outwards (recessed version); vertical slide for moving the luminaire outwards (recessed version); grub screw for locking the adjustment (recessed version); mechanical/electrical connector with m/f connectors (channel version); up to 10 units can be connected in line with a single power supply (channel version); articulated boom for orienting the fixture (for coves, false ceiling and surround versions); available as pre-assembled KIT version with 2, 3 and 4 fixtures for channel, surface and trimless mounting. Anti-yellowing epoxy powder coating, stabilised against UV rays. Product available with the following finishes: matt embossed white 12, matt embossed black 31. Passive heat dissipation via optimised fixture casing construction, which uses the heat conductivity of the metal and convective currents. Available with LED ON/OFF driver, DIMM 1-10V, PHASE CUTTING and DALI 220/240V VAC 50/60 Hz. Electronic driver for LED lamps, electronic power supply for metal halide lamps. Driver/power supply included in package. Isolation class II and III. IP20. The product can be equipped with: cross grille, no-glare honeycomb grille and UV, IR, dichroic and selective filters for food applications. Emergency unit (3 hour) available as accessory equipment. Fixture built in compliance with Standard EN 60598-1 and amendments and EC Directives 2006/95/CE (low voltage), 2004/108/CE (EMC), 2009/125/CE (Ecodesign), 2002/96/CE (RAEE), 2011/65/CE (RoHS).

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

## Optics




**Code 0.35125.0000 - Ø60mm precision optic 12° - LED**

Finishing:  
Description:



Narrow 12°




**Code 0.35126.0000 - Ø60mm precision optic 20° - LED**

Finishing:  
Description:



Medium 20°




**Code 0.35127.0000 - Ø60mm precision optic 32° - LED**

Finishing:  
Description:




Wide 32°

## Driver



### Code 0.30021.0000 - Driver

Type: On-Off  
Watt: 10W - AC Input: 220-240Vac - mA:260mA  
Description:




### Code D.30021.0000 - Driver

Type: DALI  
Watt: 33W - AC Input: 220-240Vac - mA:260mA  
Description:



### Code T.30021.0000 - Driver


Type: PHASE CUT  
Watt: 10W - AC Input: 220-240Vac - mA:260mA  
Description:



### Code V.30021.0000 - Driver


Type: DIMM 1-10V  
Watt: 33W - AC Input: 220-240Vac - mA:260mA  
Description:

## Accessories




**Code 0.26402.004A - Red glass filter 1 mm**

Type: Optical  
Finishing: Red




**Code 0.26402.005A - Green glass filter 1 mm**

Type: Optical  
Finishing: Green




**Code 0.26402.006A - Blue glass filter 1 mm**

Type: Optical  
Finishing: Blue




**Code 0.26402.007A - Pink glass filter 1 mm**

Type: Optical  
Finishing: Pink



**Code 0.26402.008A - Yellow glass filter 1 mm**

Type: Optical  
Finishing: Yellow



**Code 0.26402.009A - Orange glass filter 1 mm**



Type: Optical  
Finishing: Orange

## Accessories





### Code 0.26410.0000 - Colored Gel Slides (2 pieces)

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




### Code 0.26418.0000 - Selective filter 2700K - 2500K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26426.0000 - Selective filter 2700K - 2200K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26434.0000 - Selective filter 2700K - 2000K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26442.0000 - Honeycomb dense texture


Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26450.0000 - Honeycomb wide texture

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)


## Accessories



### Code 0.26457.0000 - Ribbed glass

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26462.0000 - Opal lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26470.0000 - Diffusive lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26477.0000 - Cross blade louver

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26485.0000 - Barn doors

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




### Code 0.26489.0012 - Cone 45 ° wall washer

Type: Optical


Finishing: Embossed matt white (Standard)

## Accessories





### Code 0.26489.0031 - Cone 45 ° wall washer

Type: Optical  
Finishing: Embossed matt black (Standard)




### Code 0.26559.0000 - Selective filter 3000K-2700K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26567.0000 - Selective filter 3000K-3600K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)






### Code 0.26575.0000 - Selective filter 3000K-4000K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Indoor | Recessed luminaires | Yori Recessed Square

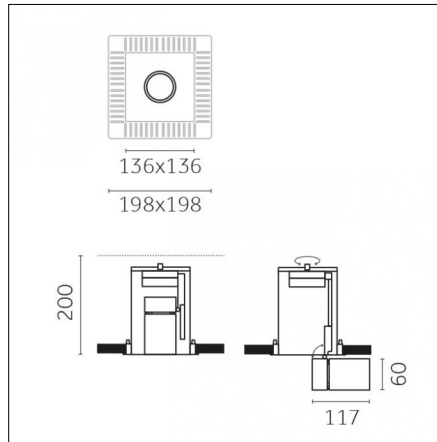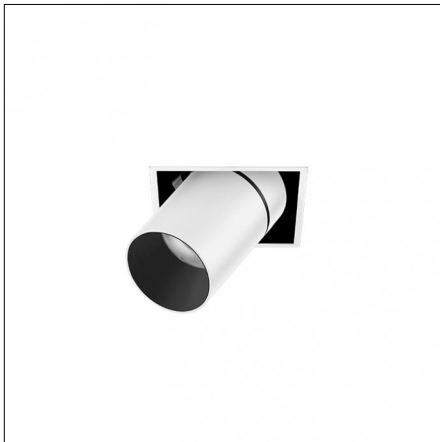

**CUT  
OUT**  
-----  
136mm



Narrow 12°

12

IP20



Risk 1

850°



### Code X.HM52B.HC12

#### Light source features

**Number of light sources:** 1

**Source type:** LED HC

**Watt:** 9W

**Lm:** 960lm

**Lm/W:** 107lm/W

**Kelvin/CRI:** 3000K / >98

**SDCM/L90 B10:** < 2 / 50000

**Fixture total output:** 787 lm

**Fixture efficacy:** 76 lm/W

**Imax:** 12440 cd

#### Electrical features

**Driver included:** NO

**Driver type:** no driver included

**Isolation class:** Class III

#### Optical features

**Beam angle:** 12°

**Optical type, adjustability:** Adjustable

**Interchangeable optic (IOS):** YES

#### Physical features

**Material:** Die-cast aluminium

**Mounting:** Recessed

**Fixing:** Ceiling

**Adjustability:** 356° horizontal axis 90° vertical axis

**Finishing:** Embossed matt white (Standard)

**Weight:** 0.9Kg



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

#### Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy  
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net  
contact@reggiani.net

## Photometries

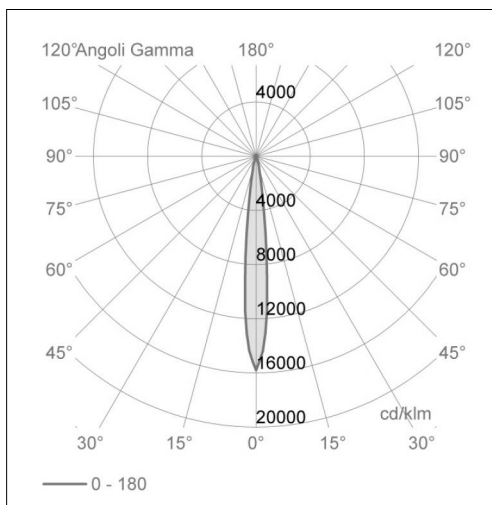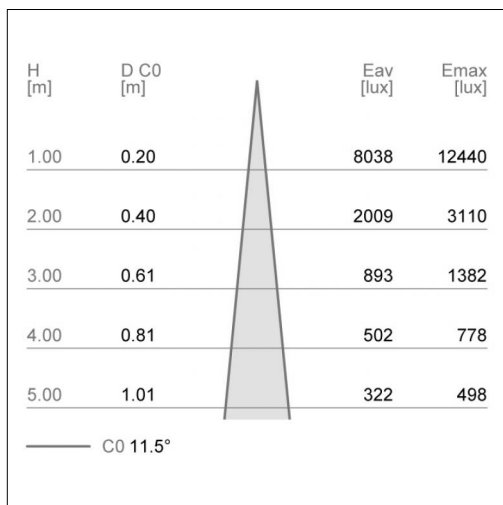

X\_HM52B\_HC\_12.ies


X\_HM52B\_HC\_12.LDT

## Specifications text

**YORI**  
Track, channel, recessed and surface mounting fixture. Symmetrical output. Available for LED and metal halide lamps. Die-cast aluminium body. Interchangeable IOS Ø 50mm (LL1) and Ø 80mm (LL2) reflectors in polycarbonate stabilised up to 140° with highly reflective metal coating - exclusive anti-scratch treatment with surface vitrification for LED lamps. Interchangeable IOS Ø 80mm reflectors in 99.99% pure aluminium, with bayonet fitting for metal halide lamps. Anti-static polycarbonate protective screen with a high transmission index (97%); transparent for very narrow light beams, satin for narrow, medium and wide beams and satin/prismatic for the Mira version; anti-yellowing, stabilised against UV rays, resistant to 850° incandescent wire test, self-extinguishing V0; tempered protective glass for IOS reflectors for metal halide lamps Spot adjustable 0° to 90° vertically and 356° horizontally; integrated plastic no-glare screen; recessed optics for improved visual comfort; mounts to false ceilings with the innovative ClikFix one-way spring system (for recessed, semi-recessed and surface mounted versions); drilled bezel for fine mortaring with 0.7 mm trimless bezel thickness for perfect plastering (recessed version); special perforated steel panel maximises heat dispersal outwards (recessed version); vertical slide for moving the luminaire outwards (recessed version); grub screw for locking the adjustment (recessed version); mechanical/electrical connector with m/f connectors (channel version); up to 10 units can be connected in line with a single power supply (channel version); articulated boom for orienting the fixture (for coves, false ceiling and surround versions); available as pre-assembled KIT version with 2, 3 and 4 fixtures for channel, surface and trimless mounting. Anti-yellowing epoxy powder coating, stabilised against UV rays. Product available with the following finishes: matt embossed white 12, matt embossed black 31. Passive heat dissipation via optimised fixture casing construction, which uses the heat conductivity of the metal and convective currents. Available with LED ON/OFF driver, DIMM 1-10V, PHASE CUTTING and DALI 220/240V VAC 50/60 Hz. Electronic driver for LED lamps, electronic power supply for metal halide lamps. Driver/power supply included in package. Isolation class II and III. IP20. The product can be equipped with: cross grille, no-glare honeycomb grille and UV, IR, dichroic and selective filters for food applications. Emergency unit (3 hour) available as accessory equipment. Fixture built in compliance with Standard EN 60598-1 and amendments and EC Directives 2006/95/CE (low voltage), 2004/108/CE (EMC), 2009/125/CE (Ecodesign), 2002/96/CE (RAEE), 2011/65/CE (RoHS).

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

## Optics




**Code 0.35125.0000 - Ø60mm precision optic 12° - LED**

Finishing:  
Description:



Narrow 12°




**Code 0.35126.0000 - Ø60mm precision optic 20° - LED**

Finishing:  
Description:



Medium 20°




**Code 0.35127.0000 - Ø60mm precision optic 32° - LED**

Finishing:  
Description:




Wide 32°

## Driver



### Code 0.30021.0000 - Driver

Type: On-Off  
Watt: 10W - AC Input: 220-240Vac - mA:260mA  
Description:




### Code D.30021.0000 - Driver

Type: DALI  
Watt: 33W - AC Input: 220-240Vac - mA:260mA  
Description:



### Code T.30021.0000 - Driver


Type: PHASE CUT  
Watt: 10W - AC Input: 220-240Vac - mA:260mA  
Description:



### Code V.30021.0000 - Driver


Type: DIMM 1-10V  
Watt: 33W - AC Input: 220-240Vac - mA:260mA  
Description:

## Accessories




**Code 0.26402.004A - Red glass filter 1 mm**

Type: Optical  
Finishing: Red




**Code 0.26402.005A - Green glass filter 1 mm**

Type: Optical  
Finishing: Green




**Code 0.26402.006A - Blue glass filter 1 mm**

Type: Optical  
Finishing: Blue




**Code 0.26402.007A - Pink glass filter 1 mm**

Type: Optical  
Finishing: Pink



**Code 0.26402.008A - Yellow glass filter 1 mm**

Type: Optical  
Finishing: Yellow



**Code 0.26402.009A - Orange glass filter 1 mm**

Type: Optical  
Finishing: Orange



## Accessories



### Code 0.26410.0000 - Colored Gel Slides (2 pieces)

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26418.0000 - Selective filter 2700K - 2500K

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26426.0000 - Selective filter 2700K - 2200K

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26434.0000 - Selective filter 2700K - 2000K

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26442.0000 - Honeycomb dense texture

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




### Code 0.26450.0000 - Honeycomb wide texture

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)


## Accessories



### Code 0.26457.0000 - Ribbed glass

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26462.0000 - Opal lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26470.0000 - Diffusive lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26477.0000 - Cross blade louver

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26485.0000 - Barn doors

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




### Code 0.26489.0012 - Cone 45 ° wall washer

Type: Optical


Finishing: Embossed matt white (Standard)

## Accessories





### Code 0.26489.0031 - Cone 45 ° wall washer

Type: Optical  
Finishing: Embossed matt black (Standard)




### Code 0.26559.0000 - Selective filter 3000K-2700K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26567.0000 - Selective filter 3000K-3600K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)






### Code 0.26575.0000 - Selective filter 3000K-4000K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Indoor | Recessed luminaires | Yori Recessed Square

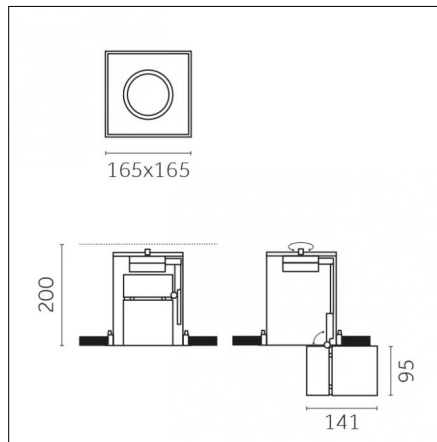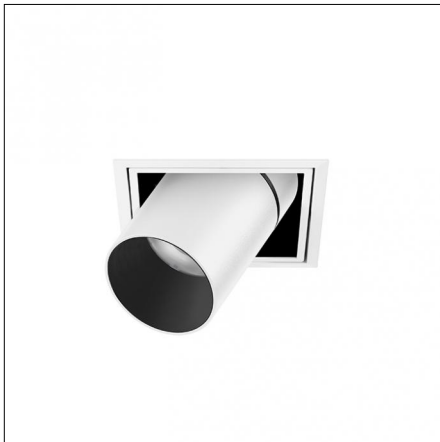

**CUT  
OUT**  
-----  
158mm



Narrow 12°

12

IP20

III

Risk 1

850°

NO



EAC



CE

CB

**Code X.LM53B.HC12**

### Light source features

**Number of light sources:** 1

**Source type:** LED HC

**Watt:** 12W

**Lm:** 1323lm

**Lm/W:** 110lm/W

**Kelvin/CRI:** 3000K / >98

**SDCM/L90 B10:** < 2 / 50000

### Electrical features

**Driver included:** NO

**Driver type:** no driver included

**Isolation class:** Class III

### Optical features

**Beam angle:** 12°

**Optical type, adjustability:** Adjustable

**Interchangeable optic (IOS):** YES

### Physical features

**Material:** Die-cast aluminium

**Mounting:** Recessed

**Fixing:** Ceiling

**Adjustability:** 356° horizontal axis 90° vertical axis

**Finishing:** Embossed matt white (Standard)

**Weight:** 1.4Kg

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

**Reggiani SPA Illuminazione**

Viale Monza, 16 20845 Sovico (MB) Italy  
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net  
contact@reggiani.net

## Photometries




## Specifications text

**YORI**  
Track, channel, recessed and surface mounting fixture. Symmetrical output. Available for LED and metal halide lamps. Die-cast aluminium body. Interchangeable IOS Ø 50mm (LL1) and Ø 80mm (LL2) reflectors in polycarbonate stabilised up to 140° with highly reflective metal coating - exclusive anti-scratch treatment with surface vitrification for LED lamps. Interchangeable IOS Ø 80mm reflectors in 99.99% pure aluminium, with bayonet fitting for metal halide lamps. Anti-static polycarbonate protective screen with a high transmission index (97%); transparent for very narrow light beams, satin for narrow, medium and wide beams and satin/prismatic for the Mira version; anti-yellowing, stabilised against UV rays, resistant to 850° incandescent wire test, self-extinguishing V0; tempered protective glass for IOS reflectors for metal halide lamps Spot adjustable 0° to 90° vertically and 356° horizontally; integrated plastic no-glare screen; recessed optics for improved visual comfort; mounts to false ceilings with the innovative KlikFix one-way spring system (for recessed, semi-recessed and surface mounted versions); drilled bezel for fine mortaring with 0.7 mm trimless bezel thickness for perfect plastering (recessed version); special perforated steel panel maximises heat dispersal outwards (recessed version); vertical slide for moving the luminaire outwards (recessed version); grub screw for locking the adjustment (recessed version); mechanical/electrical connector with m/f connectors (channel version); up to 10 units can be connected in line with a single power supply (channel version); articulated boom for orienting the fixture (for coves, false ceiling and surround versions); available as pre-assembled KIT version with 2, 3 and 4 fixtures for channel, surface and trimless mounting. Anti-yellowing epoxy powder coating, stabilised against UV rays. Product available with the following finishes: matt embossed white 12, matt embossed black 31. Passive heat dissipation via optimised fixture casing construction, which uses the heat conductivity of the metal and convective currents. Available with LED ON/OFF driver, DIMM 1-10V, PHASE CUTTING and DALI 220/240V VAC 50/60 Hz. Electronic driver for LED lamps, electronic power supply for metal halide lamps. Driver/power supply included in package. Isolation class II and III. IP20. The product can be equipped with: cross grille, no-glare honeycomb grille and UV, IR, dichroic and selective filters for food applications. Emergency unit (3 hour) available as accessory equipment. Fixture built in compliance with Standard EN 60598-1 and amendments and EC Directives 2006/95/CE (low voltage), 2004/108/CE (EMC), 2009/125/CE (Ecodesign), 2002/96/CE (RAEE), 2011/65/CE (RoHS).

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).


## Optics



**Code 0.35037.0000 - LL7 - Very wide beam (53°) - LED**

Finishing:  
Description:


Wide Wide



**Code 0.35038.0000 - LL7 - Very wide beam (53°) - LED**

Finishing:  
Description:

Very wide Very wide




**Code 0.35135.0000 - Ø95mm precision optic 12° - LED**

Finishing:  
Description:



Narrow 12°




**Code 0.35136.0000 - Ø95mm precision optic 24° - LED**

Finishing:  
Description:




Medium 24°

## Driver




### Code 0.30341.0000 - Driver

Type: On-Off  
Watt: 25W - AC Input: 220-240Vac - mA:350mA  
Description:



### Code D.30341.0000 - Driver

Type: DALI  
Watt: 36W - AC Input: 198-264Vac , 170-280Vdc - mA:350mA  
Description:



### Code T.30412.0000 - Driver Mood


Type: PHASE CUT  
Watt: W - AC Input: 220-240Vac - mA:350mA  
Description: Connection options: 1  
For more information download the dedicated driver board



### Code V.30341.0000 - Driver


Type: DIMM 1-10V  
Watt: 33W - AC Input: 120-277Vac - mA:350mA  
Description:

## Accessories




**Code 0.26406.004A - Red glass filter 1 mm**

Type: Optical  
Finishing: Red




**Code 0.26406.005A - Green glass filter 1 mm**

Type: Optical  
Finishing: Green




**Code 0.26406.006A - Blue glass filter 1 mm**

Type: Optical  
Finishing: Blue




**Code 0.26406.007A - Pink glass filter 1 mm**

Type: Optical  
Finishing: Pink



**Code 0.26406.008A - Yellow glass filter 1 mm**

Type: Optical  
Finishing: Yellow



**Code 0.26406.009A - Orange glass filter 1 mm**

Type: Optical  
Finishing: Orange



## Accessories



### Code 0.26414.0000 - Colored Gel Slides (2 pieces)

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26422.0000 - Selective filter 2700K - 2500K

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26430.0000 - Selective filter 2700K - 2200K

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26438.0000 - Selective filter 2700K - 2000K

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26446.0000 - Honeycomb dense texture

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




### Code 0.26454.0000 - Honeycomb wide texture

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)


## Accessories



### Code 0.26459.0000 - Ribbed glass

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26466.0000 - Opal lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26474.0000 - Diffusive lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26479.0000 - Cross blade louver

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26487.0000 - Barn doors

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26491.0012 - Cone 45 ° wall washer

Type: Optical



Finishing: Embossed matt white (Standard)

## Accessories





### Code 0.26491.0031 - Cone 45 ° wall washer

Type: Optical  
Finishing: Embossed matt black (Standard)




### Code 0.26563.0000 - Selective filter 3000K-2700K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26571.0000 - Selective filter 3000K-3600K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)






### Code 0.26579.0000 - Selective filter 3000K-4000K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Indoor | Recessed luminaires | Yori Recessed Square

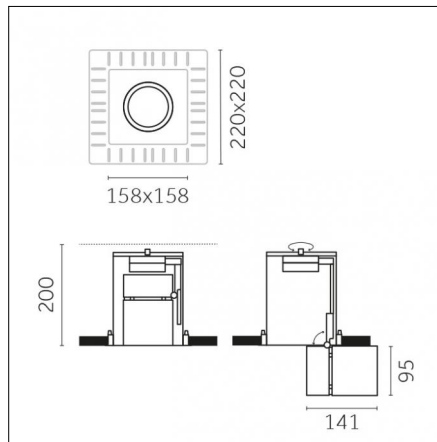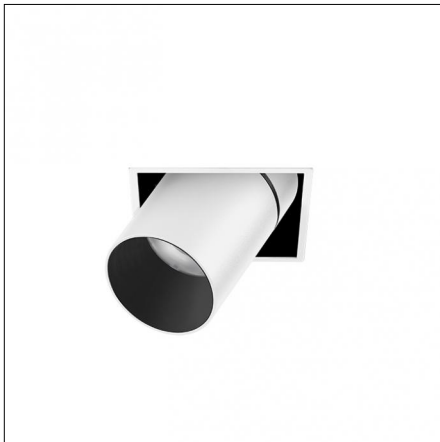

**CUT  
OUT**  
-----  
158mm



Narrow 12°

12

IP20



850°



EAC



CE

### Code X.MM53B.HC12

#### Light source features

**Number of light sources:** 1

**Source type:** LED HC

**Watt:** 12W

**Lm:** 1323lm

**Lm/W:** 110lm/W

**Kelvin/CRI:** 3000K / >98

**SDCM/L90 B10:** < 2 / 50000

#### Electrical features

**Driver included:** NO

**Driver type:** no driver included

**Isolation class:** Class III

#### Optical features

**Beam angle:** 12°

**Optical type, adjustability:** Adjustable

**Interchangeable optic (IOS):** YES

#### Physical features

**Material:** Die-cast aluminium

**Mounting:** Recessed

**Fixing:** Ceiling

**Adjustability:** 356° horizontal axis 90° vertical axis

**Finishing:** Embossed matt white (Standard)

**Weight:** 1.4Kg

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

#### Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy  
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net  
contact@reggiani.net

## Photometries



## Specifications text

### YORI

Track, channel, recessed and surface mounting fixture. Symmetrical output. Available for LED and metal halide lamps. Die-cast aluminium body. Interchangeable IOS Ø 50mm (LL1) and Ø 80mm (LL2) reflectors in polycarbonate stabilised up to 140° with highly reflective metal coating - exclusive anti-scratch treatment with surface vitrification for LED lamps. Interchangeable IOS Ø 80mm reflectors in 99.99% pure aluminium, with bayonet fitting for metal halide lamps. Anti-static polycarbonate protective screen with a high transmission index (97%); transparent for very narrow light beams, satin for narrow, medium and wide beams and satin/prismatic for the Mira version; anti-yellowing, stabilised against UV rays, resistant to 850° incandescent wire test, self-extinguishing V0; tempered protective glass for IOS reflectors for metal halide lamps Spot adjustable 0° to 90° vertically and 356° horizontally; integrated plastic no-glare screen; recessed optics for improved visual comfort; mounts to false ceilings with the innovative KlikFix one-way spring system (for recessed, semi-recessed and surface mounted versions); drilled bezel for fine mortaring with 0.7 mm trimless bezel thickness for perfect plastering (recessed version); special perforated steel panel maximises heat dispersal outwards (recessed version); vertical slide for moving the luminaire outwards (recessed version); grub screw for locking the adjustment (recessed version); mechanical/electrical connector with m/f connectors (channel version); up to 10 units can be connected in line with a single power supply (channel version); articulated boom for orienting the fixture (for coves, false ceiling and surround versions); available as pre-assembled KIT version with 2, 3 and 4 fixtures for channel, surface and trimless mounting. Anti-yellowing epoxy powder coating, stabilised against UV rays. Product available with the following finishes: matt embossed white 12, matt embossed black 31. Passive heat dissipation via optimised fixture casing construction, which uses the heat conductivity of the metal and convective currents. Available with LED ON/OFF driver, DIMM 1-10V, PHASE CUTTING and DALI 220/240V VAC 50/60 Hz. Electronic driver for LED lamps, electronic power supply for metal halide lamps. Driver/power supply included in package. Isolation class II and III. IP20. The product can be equipped with: cross grille, no-glare honeycomb grille and UV, IR, dichroic and selective filters for food applications. Emergency unit (3 hour) available as accessory equipment. Fixture built in compliance with Standard EN 60598-1 and amendments and EC Directives 2006/95/CE (low voltage), 2004/108/CE (EMC), 2009/125/CE (Ecodesign), 2002/96/CE (RAEE), 2011/65/CE (RoHS).


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

### Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy  
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net  
contact@reggiani.net


## Optics



**Code 0.35037.0000 - LL7 - Very wide beam (53°) - LED**

Finishing:  
Description:


Wide Wide



**Code 0.35038.0000 - LL7 - Very wide beam (53°) - LED**

Finishing:  
Description:

Very wide Very wide




**Code 0.35135.0000 - Ø95mm precision optic 12° - LED**

Finishing:  
Description:



Narrow 12°




**Code 0.35136.0000 - Ø95mm precision optic 24° - LED**

Finishing:  
Description:




Medium 24°

## Driver




### Code 0.30341.0000 - Driver

Type: On-Off  
Watt: 25W - AC Input: 220-240Vac - mA:350mA  
Description:



### Code D.30341.0000 - Driver

Type: DALI  
Watt: 36W - AC Input: 198-264Vac , 170-280Vdc - mA:350mA  
Description:



### Code T.30412.0000 - Driver Mood


Type: PHASE CUT  
Watt: W - AC Input: 220-240Vac - mA:350mA  
Description: Connection options: 1  
For more information download the dedicated driver board



### Code V.30341.0000 - Driver


Type: DIMM 1-10V  
Watt: 33W - AC Input: 120-277Vac - mA:350mA  
Description:

## Accessories




**Code 0.26406.004A - Red glass filter 1 mm**

Type: Optical  
Finishing: Red




**Code 0.26406.005A - Green glass filter 1 mm**

Type: Optical  
Finishing: Green




**Code 0.26406.006A - Blue glass filter 1 mm**

Type: Optical  
Finishing: Blue




**Code 0.26406.007A - Pink glass filter 1 mm**

Type: Optical  
Finishing: Pink



**Code 0.26406.008A - Yellow glass filter 1 mm**

Type: Optical  
Finishing: Yellow



**Code 0.26406.009A - Orange glass filter 1 mm**



Type: Optical  
Finishing: Orange

## Accessories





### Code 0.26414.0000 - Colored Gel Slides (2 pieces)

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




### Code 0.26422.0000 - Selective filter 2700K - 2500K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




### Code 0.26430.0000 - Selective filter 2700K - 2200K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)




### Code 0.26438.0000 - Selective filter 2700K - 2000K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26446.0000 - Honeycomb dense texture


Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26454.0000 - Honeycomb wide texture

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)


## Accessories



### Code 0.26459.0000 - Ribbed glass

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26466.0000 - Opal lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26474.0000 - Diffusive lens

Type: Optical


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26479.0000 - Cross blade louver

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26487.0000 - Barn doors

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26491.0012 - Cone 45 ° wall washer

Type: Optical



Finishing: Embossed matt white (Standard)

## Accessories





### Code 0.26491.0031 - Cone 45 ° wall washer

Type: Optical  
Finishing: Embossed matt black (Standard)




### Code 0.26563.0000 - Selective filter 3000K-2700K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26571.0000 - Selective filter 3000K-3600K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26579.0000 - Selective filter 3000K-4000K

Type: Optical  
Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)