



Metamorphosi Evo

Metamorphosi Evo

www.reggiani.net

#theilluminationcollective





Metamorphosi Evo

^{EN} The Metamorphosi Evo recessed luminaires are perfect for general or accent lighting in environments requiring a high degree of protection (IP67) such as gardens, pathways and pedestrian zones. Made with AISI 304 or 316 Marine-grade stainless steel frames, they give the outdoor setting a classic and refined ambience. The Metamorphosi Evo range comes in seven sizes, from 38 mm to 318 mm, and from 1W to 22W.

^{IT} Gli incassi Metamorphosi Evo si presentano come la soluzione ideale per un'illuminazione generale o d'accento in contesti dove si richiede elevata protezione (IP67) come giardini, camminamenti e aree pedonali. Realizzati con frame in acciaio inox AISI 304 o 316, conferiscono all'ambiente esterno che li ospita sobrietà e raffinatezza. La gamma Metamorphosi Evo presenta sette differenti misure, da 38 mm fino a 318 mm, da 1W fino a 22W.

Overview

Application:	Ground recessed
Light source:	POWER LED
Watt:	1 W - 22 W
Kelvin:	3000 K, 4000 K
Lumen:	96 lm - 4400 lm
CRI:	>80
SDCM:	<3
IP:	67 / 09/10
IK:	09, 10
Control options:	On/Off, DALI

1009



Versions/
Versioni



Metamorphosi Evo

Finishes/
Finiture



00
Stainless steel/
Acciaio inox

Beams/
Fasce

















Narrow/
Stretto





Medium/
Medio




Wide/
Largo

Sizes and tech. specifications/ Misure e info tecniche							
	Ø 38 mm	Ø 56 mm	Ø 93 mm	Ø 135 mm	Ø 190 mm	Ø 265 mm	Ø 318 mm
MetamorphosiEvo							
	p.1013	p.1013	p.1014	p.1014	p.1014	p.1015	p.1015
Max recess depth/ ingombro interno massimo	Ø90 mm 	Ø 100 mm 	Ø 120 mm 	Ø 121 mm 	Ø 179 mm 	Ø 257 mm 	Ø 310 mm 
Beam width/ Apertura cono di luce	25°	25°	10°, 30°, 45°	10°, 30°, 45°	10°, 30°, 45°	10°, 30°, 45°	10°, 30°, 45°
Light source/ Sorgente luminosa	POWER LED 1W 139lm L70B50=50,000h 3000K SDCM <3 CRI >80	POWERLED 3W 420lm L70B50=50,000h 3000K SDCM <3 CRI >80	POWERLED 1W 139lm-148lm L70B50=50,000h 3000K, 4000K SDCM <3 CRI >80	POWERLED 3W 420lm-360lm L70B50=50,000h 3000K, 4000K SDCM <3 CRI >80	POWER LED 8W 940lm - 1000lm L70B50=50,000h 3000K, 4000K SDCM <3 CRI >80	POWERLED 12W 1500lm - 1600lm L70B50=50,000h 3000K, 4000K SDCM <3 CRI >80	POWERLED 22W 4180lm - 4400lm L70B50=50,000h 3000K, 4000K SDCM <3 CRI >80


Optics



Narrow/
Stretto
B 10°




Medium/
Medio
E 25°, 30°





Wide/
Largo
H 45°

LED

MID POWER LED





3000 K, 4000 K
SDCM <3
CRI >80
L70 B50 = 50,000h

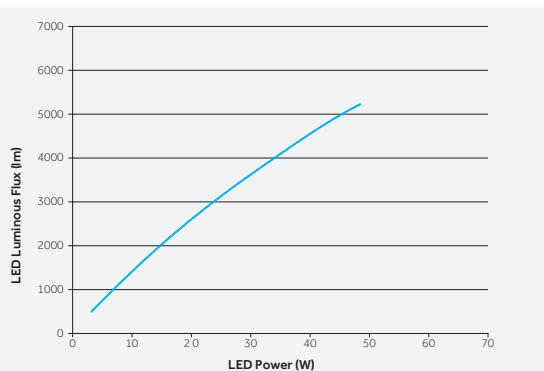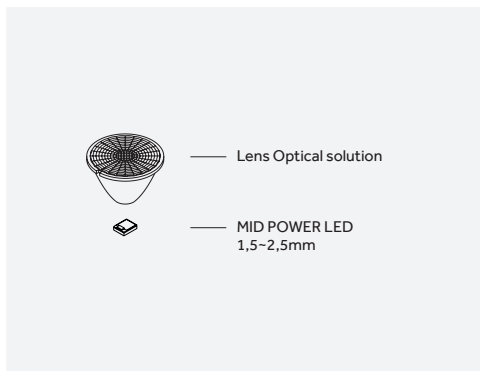

^{EN} | MID POWER LED are distinguished by excellent luminous intensity in the smaller sizes now available on the market. This feature means these light sources can be integrated into very compact luminaires with unique performance and high values of lumen delivered. MID POWER LEDs are characterized by high lumen maintenance due to improved efficacy at high operating temperatures and better optical stability over time.

^{IT} | MID POWER LED sono caratterizzati da un'eccellente intensità luminosa nelle dimensioni più ridotte ora disponibili sul mercato, e questa caratteristica consente l'integrazione di queste sorgenti in prodotti dalle dimensioni molto contenute con performance uniche ed elevati valori di lumen delivered. Queste sorgenti sono caratterizzate da un mantenimento costante nel tempo del livello di lumen grazie ad una migliore efficienza ad alte temperature e ad una migliore stabilità ottica.

Ø 38 mm



1W POWERLED		Lumen delivered up to 96 lm / Lumen maintenance: L70 B50=50,000h						
Driver remote	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	BL90	E 25° Medium	WW	3000	>80	139	<3	00



LED nominal lumen

Code example:

X . BL90 . E . WW 00

Accessories: p.1015
 Drivers: p.1013
 Finishes: p.1010
 Photometric data:
 www.reggiani.net

Ø 56 mm



3W POWERLED		Lumen delivered up to 288 lm / Lumen maintenance: L70 B50=50,000h						
Driver remote	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
X Not included	CL91	E 25° Medium	WW	3000	>80	420	<3	00

LED nominal lumen

Code example:

X . CL91 . E . WW 00

Accessories: p.1015
 Drivers: p.1013
 Finishes: p.1010
 Photometric data:
 www.reggiani.net

Ø 38 mm | Ø 56 mm | Electrical Devices



Driver/
Alimentazioni

1W POWERLED		Type	Code	W	Size (mm)	Cut-out	Tech. info	Connectable fixtures	Max.distance	Cable section
On/Off	0.30380.0000	40W		63,5 mm	90-305Vac / 47/63Hz / 24V	Max: 10	10 m	1.5 mm ²		

3W POWERLED		Type	Code	W	Size (mm)	Cut-out	Tech. info	Connectable fixtures	Max.distance	Cable section
On/Off	0.30380.0000	40W		63,5 mm	90-305Vac / 47/63Hz / 24V	Max: 10	10 m	1.5 mm ²		

Ø 93 mm

Risk 1 0.70 1.000 kg IP67 IK09 850° CE




Code example:
0 . **DL90** **B** . **WW** **00**

Accessories: p.1015
 Finishes: p.1010
 Photometric data:
 www.reggiani.net

1W POWERLED		Lumen delivered up to 120 lm / Lumen maintenance: L70 B50=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	DL90	B 10° Narrow	WW	3000	>80	139	<3	00
		E 30° Medium	NN	4000	>80	148	<3	
		H 45° Wide	LED nominal lumen					

Ø 135 mm

Risk 1 1.25 5.000 kg IP67 IK10 850° CE




Code example:
0 . **FL91** **B** . **WW** **00**

Accessories: p.1015
 Finishes: p.1010
 Photometric data:
 www.reggiani.net

3W POWERLED		Lumen delivered up to 360 lm / Lumen maintenance: L70 B50=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	FL91	B 10° Narrow	WW	3000	>80	420	<3	00
		E 30° Medium	NN	4000	>80	445	<3	
		H 45° Wide	LED nominal lumen					

Ø 190 mm

Risk 1 2.20 5.000 kg IP67 IK10 850° CE




Code example:
0 . **GL92** **B** . **WW** **00**

Accessories: p.1015
 Finishes: p.1010
 Photometric data:
 www.reggiani.net

8W POWERLED		Lumen delivered up to 750 lm / Lumen maintenance: L70 B50=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	GL92	B 10° Narrow	WW	3000	>80	940	<3	00
D DALI		E 30° Medium	NN	4000	>80	1000	<3	
		H 45° Wide	LED nominal lumen					

Ø 265 mm

Risk 1 4.50 5.000kg IP67 IK09 850° CE

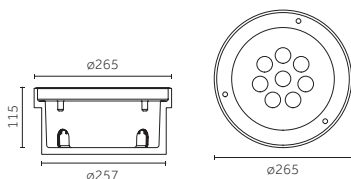

Code example:


0 . HL93 B . WW 00

Accessories: p.1015
 Finishes: p.1010
 Photometric data:
 www.reggiani.net

12 W POWER LED		Lumen delivered up to 1200 lm / Lumen maintenance: L70 B50=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	HL93	B 10° Narrow	WW	3000	>80	1500	<3	00
D DALI		E 30° Medium	NN	4000	>80	1600	<3	
		H 45° Wide	LED nominal lumen					

Ø 318 mm

Risk 1 5.00 5.000kg IP67 IK10 850° CE

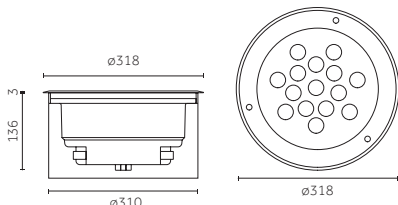

Code example:


0 . LL95 B . WW 00

Accessories: p.1015
 Finishes: p.1010
 Photometric data:
 www.reggiani.net

22 W POWER LED		Lumen delivered up to 2200 lm / Lumen maintenance: L70 B50=50,000h						
Driver	Version	Optics	LED	K	CRI	lm	SDCM	Finishes
0 On-Off	LL95	B 10° Narrow	WW	3000	>80	4180	<3	00
D DALI		E 30° Medium	NN	4000	>80	4400	<3	
		H 45° Wide	LED nominal lumen					

Accessories

Accessories/
 Accessori



Description
 IP68 accessory for cascade connection/
 Accessorio IP68 per connessione in cascata

Code
 0.30381.0000