


Indoor | Ceiling mounted luminaires | Fade



Product no optic included

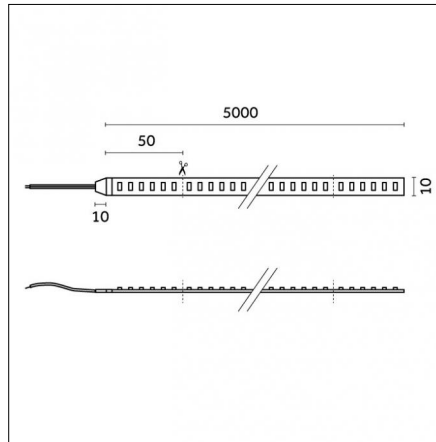

### Code X.SIP65.HN00

#### Light source features

**Number of light sources:** 1

**Source type:** LED HN

**Watt:** 14.5 W/mW

**Lm:** 1080lm

**Lm/W:** 75lm/W

**Kelvin/CRI:** 4000K / >90

**SDCM/L80 B10:** < 3 / 50000

#### Electrical features

**Driver included:** NO

**Driver type:** no driver included 24V DC

**Isolation class:** Class III

#### Optical features

**Beam angle:** no optic included

**Interchangeable optic (IOS):** NO

#### Physical features

**Material:** Flexible circuit board

**Mounting:** Surface mounted

**Finishing:** Without finish / Stainles Steel / Natural aluminium (Standard)


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

#### Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy  
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999


www.reggiani.net  
contact@reggiani.net

## Driver




### Code 0.30820.0000 - Driver

Type: On-Off  
Watt: 15W - AC Input: 220-240Vac - mA:mA  
Description:




### Code 0.30821.0000 - Driver

Type: On-Off  
Watt: 30W - AC Input: 220-240Vac - mA:mA  
Description:




### Code 0.30822.0000 - Driver

Type: On-Off  
Watt: 60W - AC Input: 120-240V - mA:mA  
Description:




### Code 0.30823.0000 - Driver

Type: On-Off  
Watt: 75W - AC Input: 220-240Vac - mA:mA  
Description:



### Code 0.30824.0000 - Driver


Type: On-Off  
Watt: 100W - AC Input: 120-240V - mA:mA  
Description:



### Code 0.30825.0000 - Driver

Type: On-Off  
Watt: 200W - AC Input: 120-240V - mA:mA  
Description:

## Driver




### Code H.30826.0000 - Dimmer - 1 channel

Type: Bluetooth

Watt: 280W - AC Input: 24-48Vcc - mA:mA

Description:





### Code Y.30826.0000 - Dimmer -1 channel

Type: Dimmer 1-10V / DALI / PUSH

Watt: 280W - AC Input: 24-48Vcc - mA:mA

Description:


## Accessories



### Code 0.26800.0000 - 3030mm Aluminium Profile

Type: Mounting


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26800.0012 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt white (Standard)



### Code 0.26800.0031 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt black (Standard)



### Code 0.26801.0000 - Opal Diffuser T 55% 3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26802.0000 - Opal Diffuser T 70% 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)





### Code 0.26803.0000 - Micro Prismatic Diffuser Low Glare 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).



## Accessories



### Code 0.26804.0000 - Black Frosted diffuser L3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26815.0000 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26815.0012 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting



Finishing: Embossed matt white (Standard)



### Code 0.26815.0031 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting

Finishing: Embossed matt black (Standard)



### Code 0.26816.0000 - Adjustable brackets (2x) +/-40° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)




### Code 0.26817.0000 - Fixed tilted brackets (4x) 15°/30°/45°/60° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)

## Accessories




### Code 0.26818.0000 - Fixed brackets (2x) for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)




### Code 0.26819.0000 - Double sided tape 3300mm

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)

Indoor | Ceiling mounted luminaires | Fade

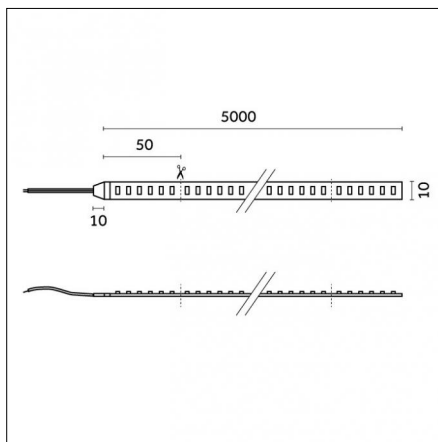

Product no optic  
included



IP65



### Code X.SIP65.HQ00

#### Light source features

**Number of light sources:** 1

**Source type:** LED HQ

**Watt:** 14.5 W/mW

**Lm:** 1080lm

**Lm/W:** 75lm/W

**Kelvin/CRI:** 3000K / >90

**SDCM/L80 B10:** < 3 / 50000

#### Electrical features

**Driver included:** NO

**Driver type:** no driver included 24V DC

**Isolation class:** Class III

#### Optical features

**Beam angle:** no optic included

**Interchangeable optic (IOS):** NO

#### Physical features

**Material:** Flexible circuit board

**Mounting:** Surface mounted

**Finishing:** Without finish / Stainles Steel / Natural aluminium  
(Standard)


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

#### Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy  
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999


www.reggiani.net  
contact@reggiani.net

## Driver




### Code 0.30820.0000 - Driver

Type: On-Off  
Watt: 15W - AC Input: 220-240Vac - mA:mA  
Description:




### Code 0.30821.0000 - Driver

Type: On-Off  
Watt: 30W - AC Input: 220-240Vac - mA:mA  
Description:




### Code 0.30822.0000 - Driver

Type: On-Off  
Watt: 60W - AC Input: 120-240V - mA:mA  
Description:




### Code 0.30823.0000 - Driver

Type: On-Off  
Watt: 75W - AC Input: 220-240Vac - mA:mA  
Description:



### Code 0.30824.0000 - Driver

Type: On-Off  
Watt: 100W - AC Input: 120-240V - mA:mA  
Description:




### Code 0.30825.0000 - Driver

Type: On-Off  
Watt: 200W - AC Input: 120-240V - mA:mA  
Description:



## Driver




### Code H.30826.0000 - Dimmer - 1 channel

Type: Bluetooth

Watt: 280W - AC Input: 24-48Vcc - mA:mA

Description:





### Code Y.30826.0000 - Dimmer -1 channel

Type: Dimmer 1-10V / DALI / PUSH

Watt: 280W - AC Input: 24-48Vcc - mA:mA

Description:


## Accessories



### Code 0.26800.0000 - 3030mm Aluminium Profile

Type: Mounting


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26800.0012 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt white (Standard)



### Code 0.26800.0031 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt black (Standard)



### Code 0.26801.0000 - Opal Diffuser T 55% 3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26802.0000 - Opal Diffuser T 70% 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)





### Code 0.26803.0000 - Micro Prismatic Diffuser Low Glare 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).



## Accessories



### Code 0.26804.0000 - Black Frosted diffuser L3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26815.0000 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26815.0012 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting



Finishing: Embossed matt white (Standard)



### Code 0.26815.0031 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting

Finishing: Embossed matt black (Standard)



### Code 0.26816.0000 - Adjustable brackets (2x) +/-40° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)




### Code 0.26817.0000 - Fixed tilted brackets (4x) 15°/30°/45°/60° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)

## Accessories




### Code 0.26818.0000 - Fixed brackets (2x) for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)




### Code 0.26819.0000 - Double sided tape 3300mm

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)

Indoor | Ceiling mounted luminaires | Fade

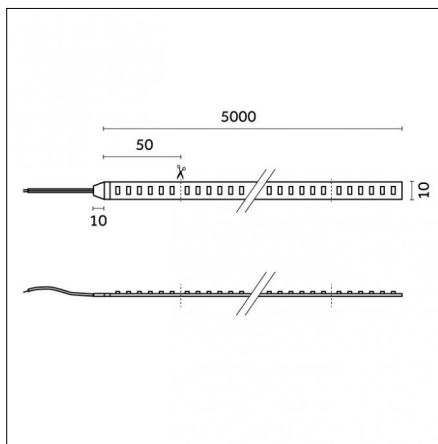

Product no optic included



IP65



**Code X.SIP65.HW00**

### Light source features

**Number of light sources:** 1

**Source type:** LED HW

**Watt:** 14.5 W/mW

**Lm:** 1080lm

**Lm/W:** 75lm/W

**Kelvin/CRI:** 2700K / >90

**SDCM/L80 B10:** < 3 / 50000

### Electrical features

**Driver included:** NO

**Driver type:** no driver included 24V DC

**Isolation class:** Class III

### Optical features

**Beam angle:** no optic included

**Interchangeable optic (IOS):** NO

### Physical features

**Material:** Flexible circuit board

**Mounting:** Surface mounted

**Finishing:** Without finish / Stainles Steel / Natural aluminium (Standard)


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

**Reggiani SPA Illuminazione**

Viale Monza, 16 20845 Sovico (MB) Italy  
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999


www.reggiani.net  
contact@reggiani.net

## Driver




### Code 0.30820.0000 - Driver

Type: On-Off  
Watt: 15W - AC Input: 220-240Vac - mA:mA  
Description:




### Code 0.30821.0000 - Driver

Type: On-Off  
Watt: 30W - AC Input: 220-240Vac - mA:mA  
Description:




### Code 0.30822.0000 - Driver

Type: On-Off  
Watt: 60W - AC Input: 120-240V - mA:mA  
Description:




### Code 0.30823.0000 - Driver

Type: On-Off  
Watt: 75W - AC Input: 220-240Vac - mA:mA  
Description:



### Code 0.30824.0000 - Driver


Type: On-Off  
Watt: 100W - AC Input: 120-240V - mA:mA  
Description:



### Code 0.30825.0000 - Driver

Type: On-Off  
Watt: 200W - AC Input: 120-240V - mA:mA  
Description:

## Driver




### Code H.30826.0000 - Dimmer - 1 channel

Type: Bluetooth

Watt: 280W - AC Input: 24-48Vcc - mA:mA

Description:





### Code Y.30826.0000 - Dimmer -1 channel

Type: Dimmer 1-10V / DALI / PUSH

Watt: 280W - AC Input: 24-48Vcc - mA:mA

Description:


## Accessories



### Code 0.26800.0000 - 3030mm Aluminium Profile

Type: Mounting


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26800.0012 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt white (Standard)



### Code 0.26800.0031 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt black (Standard)



### Code 0.26801.0000 - Opal Diffuser T 55% 3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26802.0000 - Opal Diffuser T 70% 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26803.0000 - Micro Prismatic Diffuser Low Glare 3030mm



Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).





## Accessories



### Code 0.26804.0000 - Black Frosted diffuser L3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26815.0000 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26815.0012 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting



Finishing: Embossed matt white (Standard)



### Code 0.26815.0031 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting

Finishing: Embossed matt black (Standard)



### Code 0.26816.0000 - Adjustable brackets (2x) +/-40° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)




### Code 0.26817.0000 - Fixed tilted brackets (4x) 15°/30°/45°/60° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)

## Accessories



### Code 0.26818.0000 - Fixed brackets (2x) for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)




### Code 0.26819.0000 - Double sided tape 3300mm

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)

Indoor | Ceiling mounted luminaires | Fade

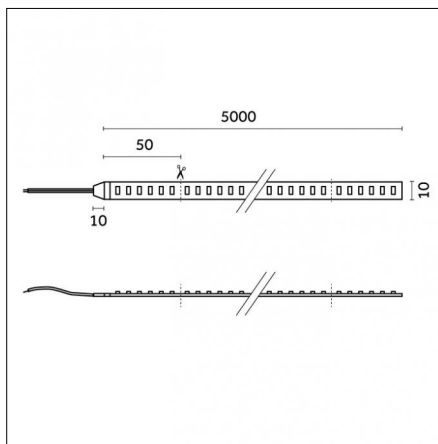

Product no optic  
included



### Code X.SIP65.WB00

#### Light source features

**Number of light sources:** 1

**Source type:** LED WB

**Watt:** 14.5 W/mW

**Lm:** 1080lm

**Lm/W:** 75lm/W

**Kelvin/CRI:** 2200K / >90

**SDCM/L80 B10:** < 3 / 50000

#### Electrical features

**Driver included:** NO

**Driver type:** no driver included 24V DC

**Isolation class:** Class III

#### Optical features

**Beam angle:** no optic included

**Interchangeable optic (IOS):** NO

#### Physical features

**Material:** Flexible circuit board

**Mounting:** Surface mounted

**Finishing:** Without finish / Stainles Steel / Natural aluminium  
(Standard)


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

#### Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy  
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999


www.reggiani.net  
contact@reggiani.net

## Driver




### Code 0.30820.0000 - Driver

Type: On-Off  
Watt: 15W - AC Input: 220-240Vac - mA:mA  
Description:




### Code 0.30821.0000 - Driver

Type: On-Off  
Watt: 30W - AC Input: 220-240Vac - mA:mA  
Description:




### Code 0.30822.0000 - Driver

Type: On-Off  
Watt: 60W - AC Input: 120-240V - mA:mA  
Description:




### Code 0.30823.0000 - Driver

Type: On-Off  
Watt: 75W - AC Input: 220-240Vac - mA:mA  
Description:



### Code 0.30824.0000 - Driver


Type: On-Off  
Watt: 100W - AC Input: 120-240V - mA:mA  
Description:



### Code 0.30825.0000 - Driver

Type: On-Off  
Watt: 200W - AC Input: 120-240V - mA:mA  
Description:

## Driver




### Code H.30826.0000 - Dimmer - 1 channel

Type: Bluetooth

Watt: 280W - AC Input: 24-48Vcc - mA:mA

Description:





### Code Y.30826.0000 - Dimmer -1 channel

Type: Dimmer 1-10V / DALI / PUSH

Watt: 280W - AC Input: 24-48Vcc - mA:mA

Description:


## Accessories



### Code 0.26800.0000 - 3030mm Aluminium Profile

Type: Mounting


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26800.0012 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt white (Standard)



### Code 0.26800.0031 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt black (Standard)



### Code 0.26801.0000 - Opal Diffuser T 55% 3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26802.0000 - Opal Diffuser T 70% 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)





### Code 0.26803.0000 - Micro Prismatic Diffuser Low Glare 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).



## Accessories



### Code 0.26804.0000 - Black Frosted diffuser L3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26815.0000 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26815.0012 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting



Finishing: Embossed matt white (Standard)



### Code 0.26815.0031 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting

Finishing: Embossed matt black (Standard)



### Code 0.26816.0000 - Adjustable brackets (2x) +/-40° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)




### Code 0.26817.0000 - Fixed tilted brackets (4x) 15°/30°/45°/60° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)

## Accessories



### Code 0.26818.0000 - Fixed brackets (2x) for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)



### Code 0.26819.0000 - Double sided tape 3300mm


Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)



Indoor | Ceiling mounted luminaires | Fade

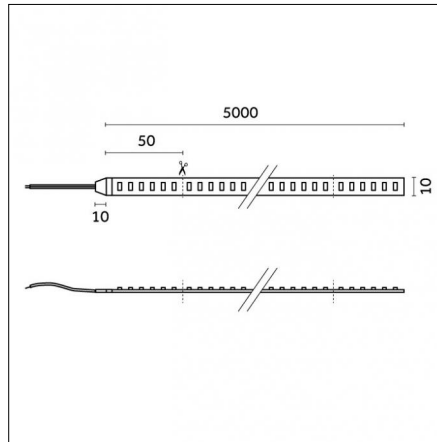

Product no optic  
included



### Code X.SIP65.WQ00

#### Light source features

**Number of light sources:** 1

**Source type:** LED WQ

**Watt:** 14.5 W/mW

**Lm:** 1080lm

**Lm/W:** 75lm/W

**Kelvin/CRI:** 3500K / >90

**SDCM/L80 B10:** < 3 / 50000

#### Electrical features

**Driver included:** NO

**Driver type:** no driver included 24V DC

**Isolation class:** Class III

#### Optical features

**Beam angle:** no optic included

**Interchangeable optic (IOS):** NO

#### Physical features

**Material:** Flexible circuit board

**Mounting:** Surface mounted

**Finishing:** Without finish / Stainles Steel / Natural aluminium  
(Standard)


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

#### Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy  
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999


www.reggiani.net  
contact@reggiani.net

## Driver




### Code 0.30820.0000 - Driver

Type: On-Off  
Watt: 15W - AC Input: 220-240Vac - mA:mA  
Description:




### Code 0.30821.0000 - Driver

Type: On-Off  
Watt: 30W - AC Input: 220-240Vac - mA:mA  
Description:




### Code 0.30822.0000 - Driver

Type: On-Off  
Watt: 60W - AC Input: 120-240V - mA:mA  
Description:




### Code 0.30823.0000 - Driver

Type: On-Off  
Watt: 75W - AC Input: 220-240Vac - mA:mA  
Description:



### Code 0.30824.0000 - Driver


Type: On-Off  
Watt: 100W - AC Input: 120-240V - mA:mA  
Description:



### Code 0.30825.0000 - Driver

Type: On-Off  
Watt: 200W - AC Input: 120-240V - mA:mA  
Description:

## Driver




### Code H.30826.0000 - Dimmer - 1 channel

Type: Bluetooth

Watt: 280W - AC Input: 24-48Vcc - mA:mA

Description:





### Code Y.30826.0000 - Dimmer -1 channel

Type: Dimmer 1-10V / DALI / PUSH

Watt: 280W - AC Input: 24-48Vcc - mA:mA

Description:


## Accessories



### Code 0.26800.0000 - 3030mm Aluminium Profile

Type: Mounting


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26800.0012 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt white (Standard)



### Code 0.26800.0031 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt black (Standard)



### Code 0.26801.0000 - Opal Diffuser T 55% 3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26802.0000 - Opal Diffuser T 70% 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)





### Code 0.26803.0000 - Micro Prismatic Diffuser Low Glare 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).



## Accessories



### Code 0.26804.0000 - Black Frosted diffuser L3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26815.0000 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



### Code 0.26815.0012 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting



Finishing: Embossed matt white (Standard)



### Code 0.26815.0031 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting

Finishing: Embossed matt black (Standard)



### Code 0.26816.0000 - Adjustable brackets (2x) +/-40° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)




### Code 0.26817.0000 - Fixed tilted brackets (4x) 15°/30°/45°/60° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)

## Accessories




### Code 0.26818.0000 - Fixed brackets (2x) for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)



### Code 0.26819.0000 - Double sided tape 3300mm

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)