


## PRODUCT INFORMATION

Description ECO FLEX 238 2400K | 10mm | IP54 | 24V | 93CRI | 19.2W | 1630LM | 29.4mm Cut | VHB | 1000mm

Product Code 011-1022

Product Range Eco Flex

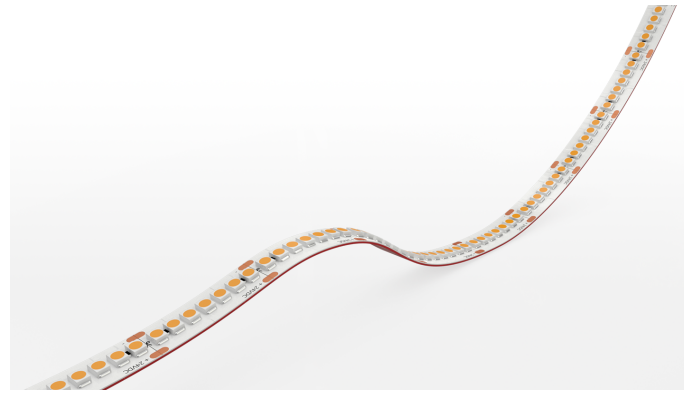

## PRODUCT SPECIFICATION


Dimensions	H2.00/W10.00mm
Cutting Interval	29.4mm
LED Pitch	4.2mm
Bend Direction	TV
Minimum Bend Radius	10mm
Colour Temperature	2400K
Bin/step	3 SDCM
CRI Rating	93.00
Lifetime	> 50,000 h
Operating Temp	Min = -25Â°C, Max = 40Â°C
IP Rating	IP54
Mounting	VHB
Connection	Hardwire tails or snap connectors

## PERFORMANCE DATA (for 1000mm)

Power Consumption	19.20 W
Supply Voltage	24.00V DC
Supply Current	0.80 A
Luminous Flux	1630.00lm/m
Lumen Efficiency	85.00lm/w
Max Power Length	5000mm
Beam Angle	120Â°



## TECHNICAL DRAWING

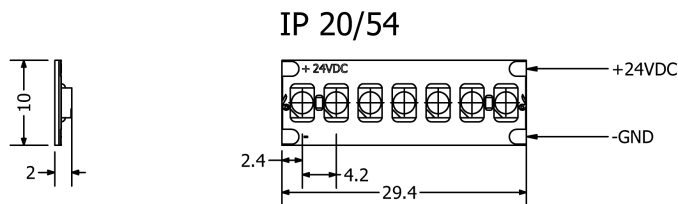


## PRODUCT INFORMATION

Description ECO FLEX 238 6000K | 10mm | IP54 | 24V | 93CRI | 19.2W | 1809LM | 29.4mm Cut | VHB | 1000mm

Product Code 011-1017

Product Range Eco Flex

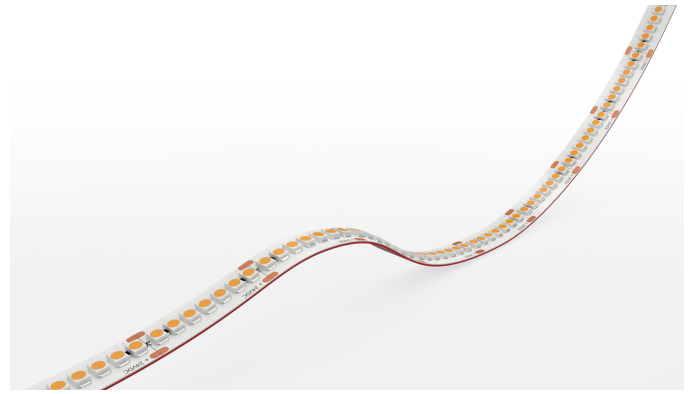

## PRODUCT SPECIFICATION


Dimensions	H2.00/W10.00mm
Cutting Interval	29.4mm
LED Pitch	4.2mm
Bend Direction	TV
Minimum Bend Radius	10mm
Colour Temperature	6000K
Bin/step	3 SDCM
CRI Rating	93.00
Lifetime	> 50,000 h
Operating Temp	Min = -25Â°C, Max = 40Â°C
IP Rating	IP54
Mounting	VHB
Connection	Hardwire tails or snap connectors

## PERFORMANCE DATA (for 1000mm)

Power Consumption	19.20 W
Supply Voltage	24.00V DC
Supply Current	0.80 A
Luminous Flux	1809.00lm/m
Lumen Efficiency	94.00lm/w
Max Power Length	5000mm
Beam Angle	120Â°



## TECHNICAL DRAWING

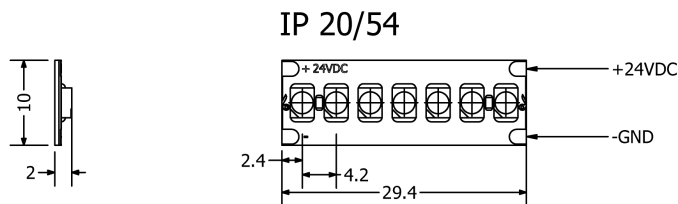


## PRODUCT INFORMATION

Description	ECO FLEX 238 4000K   10mm   IP54   24V   93CRI   19.2W   1887LM   29.4mm Cut   VHB   1000mm
Product Code	011-1012
Product Range	Eco Flex

## PRODUCT SPECIFICATION

Dimensions	H2.00/W10.00mm
Cutting Interval	29.4mm
LED Pitch	4.2mm
Bend Direction	TV
Minimum Bend Radius	10mm
Colour Temperature	4000K
Bin/step	3 SDCM
CRI Rating	93.00
Lifetime	> 50,000 h
Operating Temp	Min = -25Â°C, Max = 40Â°C
IP Rating	IP54
Mounting	VHB
Connection	Hardwire tails or snap connectors

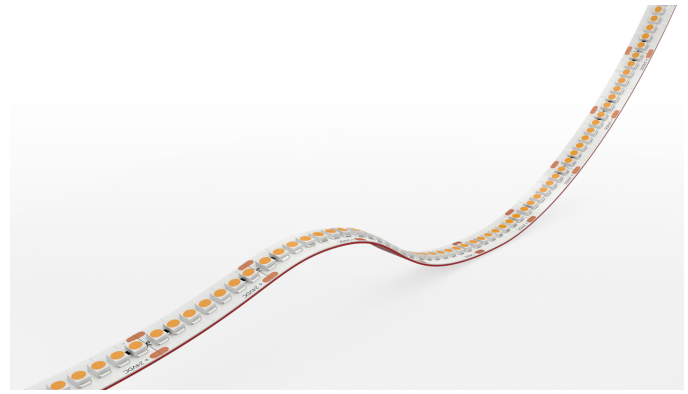


## PERFORMANCE DATA (for 1000mm)

Power Consumption	19.20 W
Supply Voltage	24.00V DC
Supply Current	0.80 A
Luminous Flux	1887.00lm/m
Lumen Efficiency	98.00lm/w
Max Power Length	5000mm
Beam Angle	120Â°



## TECHNICAL DRAWING

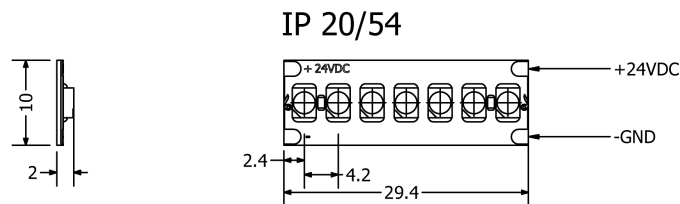


## PRODUCT INFORMATION

Description ECO FLEX 238 3000K | 10mm | IP54 | 24V | 93CRI | 19.2W | 1759LM | 29.4mm Cut | VHB | 1000mm

Product Code 011-1007

Product Range Eco Flex

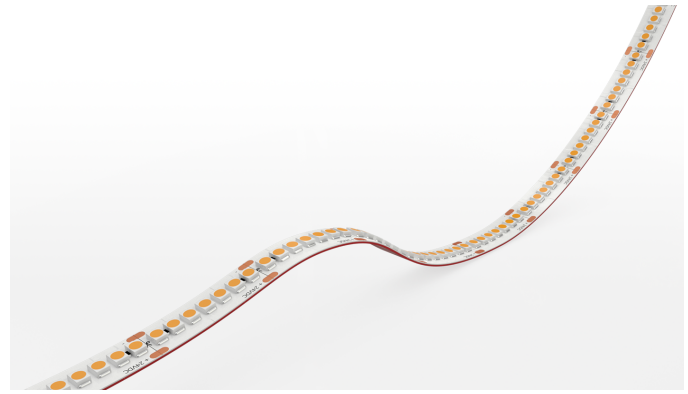

## PRODUCT SPECIFICATION


Dimensions	H2.00/W10.00mm
Cutting Interval	29.4mm
LED Pitch	4.2mm
Bend Direction	TV
Minimum Bend Radius	10mm
Colour Temperature	3000K
Bin/step	3 SDCM
CRI Rating	93.00
Lifetime	> 50,000 h
Operating Temp	Min = -25Â°C, Max = 40Â°C
IP Rating	IP54
Mounting	VHB
Connection	Hardwire tails or snap connectors

## PERFORMANCE DATA (for 1000mm)

Power Consumption	19.20 W
Supply Voltage	24.00V DC
Supply Current	0.80 A
Luminous Flux	1759.00lm/m
Lumen Efficiency	92.00lm/w
Max Power Length	5000mm
Beam Angle	120Â°



## TECHNICAL DRAWING

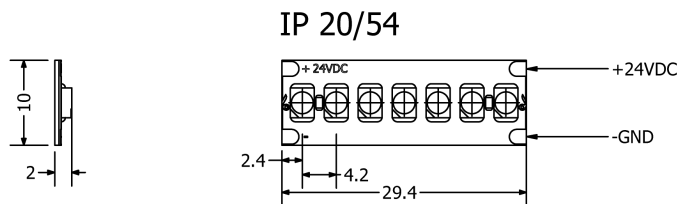


## PRODUCT INFORMATION

Description ECO FLEX 238 2700K | 10mm | IP54 | 24V | 93CRI | 19.2W | 1642LM | 29.4mm Cut | VHB | 1000mm

Product Code 011-1002

Product Range Eco Flex

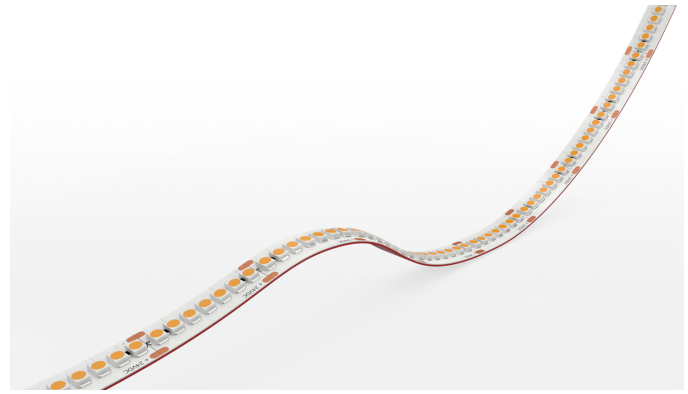

## PRODUCT SPECIFICATION

Dimensions	H2.00/W10.00mm
Cutting Interval	29.4mm
LED Pitch	4.2mm
Bend Direction	TV
Minimum Bend Radius	10mm
Colour Temperature	2700K
Bin/step	3 SDCM
CRI Rating	93.00
Lifetime	> 50,000 h
Operating Temp	Min = -25Â°C, Max = 40Â°C
IP Rating	IP54
Mounting	VHB
Connection	Hardwire tails or snap connectors

## PERFORMANCE DATA (for 1000mm)

Power Consumption	19.20 W
Supply Voltage	24.00V DC
Supply Current	0.80 A
Luminous Flux	1642.00lm/m
Lumen Efficiency	86.00lm/w
Max Power Length	5000mm
Beam Angle	120Â°



## TECHNICAL DRAWING

