


PRODUCT INFORMATION

Description	ECO FLEX 238 2700K 10mm IP20 24V 93CRI 19.2W 1642LM 28.8mm Cut VHB 1000mm
Product Code	011-1001
Product Range	Eco Flex

PRODUCT SPECIFICATION

Dimensions	H2.00/W10.00mm
Cutting Interval	29.4mm
LED Pitch	4.2mm
Bend Direction	TV
Minimum Bend Radius	10mm
Colour Temperature	2700K
Bin/step	3 SDCM
CRI Rating	93.00
Lifetime	> 50,000 h
Operating Temp	Min = -25Â°C, Max = 40Â°C
IP Rating	IP20
Mounting	VHB
Connection	Hardwire tails or snap connectors

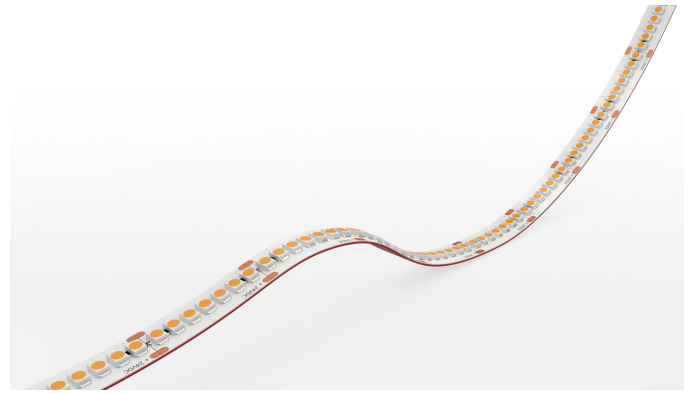


PERFORMANCE DATA (for 1000mm)

Power Consumption	19.20 W
Supply Voltage	24.00V DC
Supply Current	0.80 A
Luminous Flux	1642.00lm/m
Lumen Efficiency	86.00lm/w
Max Power Length	5000mm
Beam Angle	120Â°



TECHNICAL DRAWING

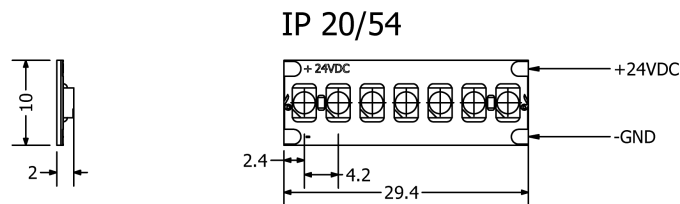


PRODUCT INFORMATION

Description	ECO FLEX 238 3000K 10mm IP20 24V 93CRI 19.2W 1759LM 28.8mm Cut VHB 1000mm
Product Code	011-1006
Product Range	Eco Flex

PRODUCT SPECIFICATION

Dimensions	H2.00/W10.00mm
Cutting Interval	29.4mm
LED Pitch	4.2mm
Bend Direction	TV
Minimum Bend Radius	10mm
Colour Temperature	3000K
Bin/step	3 SDCM
CRI Rating	93.00
Lifetime	> 50,000 h
Operating Temp	Min = -25Â°C, Max = 40Â°C
IP Rating	IP20
Mounting	VHB
Connection	Hardwire tails or snap connectors

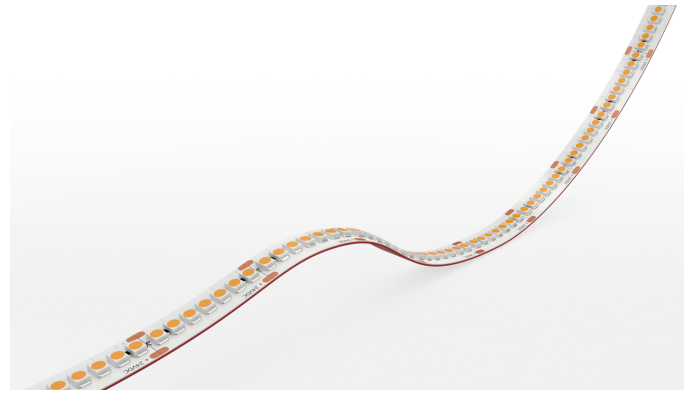


PERFORMANCE DATA (for 1000mm)

Power Consumption	19.20 W
Supply Voltage	24.00V DC
Supply Current	0.80 A
Luminous Flux	1759.00lm/m
Lumen Efficiency	92.00lm/w
Max Power Length	5000mm
Beam Angle	120Â°



TECHNICAL DRAWING

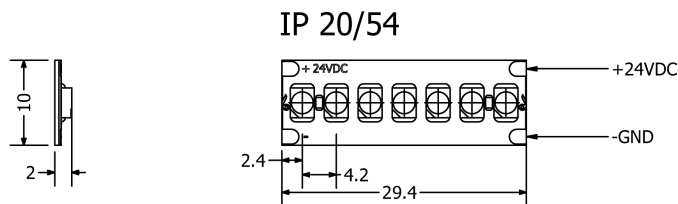


PRODUCT INFORMATION

Description	ECO FLEX 238 4000K 10mm IP20 24V 93CRI 19.2W 1887LM 28.8mm Cut VHB 1000mm
Product Code	011-1011
Product Range	Eco Flex

PRODUCT SPECIFICATION

Dimensions	H2.00/W10.00mm
Cutting Interval	29.4mm
LED Pitch	4.2mm
Bend Direction	TV
Minimum Bend Radius	10mm
Colour Temperature	4000K
Bin/step	3 SDCM
CRI Rating	93.00
Lifetime	> 50,000 h
Operating Temp	Min = -25Â°C, Max = 40Â°C
IP Rating	IP20
Mounting	VHB
Connection	Hardwire tails or snap connectors

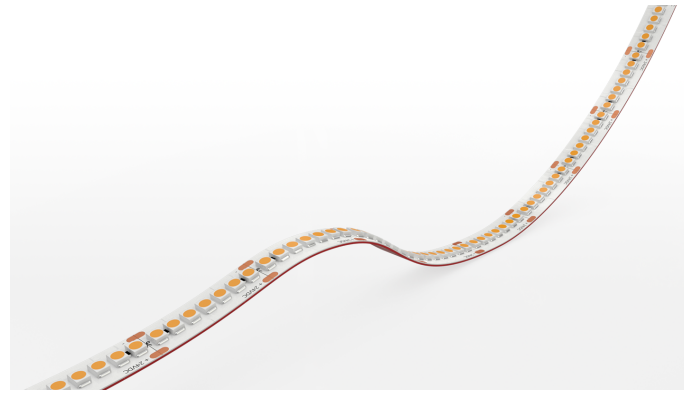


PERFORMANCE DATA (for 1000mm)

Power Consumption	19.20 W
Supply Voltage	24.00V DC
Supply Current	0.80 A
Luminous Flux	1887.00lm/m
Lumen Efficiency	98.00lm/w
Max Power Length	5000mm
Beam Angle	120Â°



TECHNICAL DRAWING

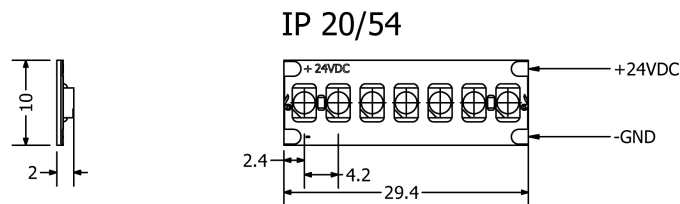


PRODUCT INFORMATION

Description	ECO FLEX 238 6000K 10mm IP20 24V 95CRI 19.2W 1809LM 28.8mm Cut VHB 1000mm
Product Code	011-1016
Product Range	Eco Flex

PRODUCT SPECIFICATION

Dimensions	H2.00/W10.00mm
Cutting Interval	29.4mm
LED Pitch	4.2mm
Bend Direction	TV
Minimum Bend Radius	10mm
Colour Temperature	6000K
Bin/step	3 SDCM
CRI Rating	95.00
Lifetime	> 50,000 h
Operating Temp	Min = -25Â°C, Max = 40Â°C
IP Rating	IP20
Mounting	VHB
Connection	Hardwire tails or snap connectors

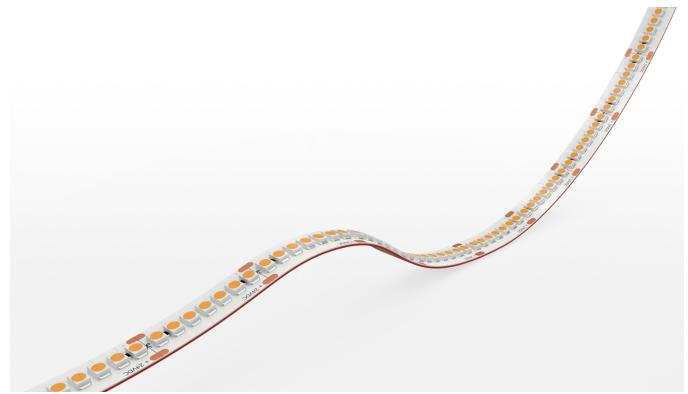


PERFORMANCE DATA (for 1000mm)

Power Consumption	19.20 W
Supply Voltage	24.00V DC
Supply Current	0.80 A
Luminous Flux	1809.00lm/m
Lumen Efficiency	94.00lm/w
Max Power Length	5000mm
Beam Angle	120Â°



TECHNICAL DRAWING

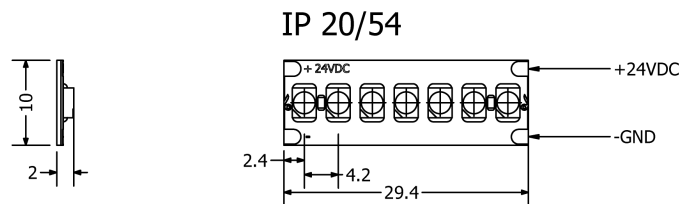


PRODUCT INFORMATION

Description	ECO FLEX 238 2400K 10mm IP20 24V 93CRI 19.2W 1630LM 29.4mm Cut VHB 1000mm
Product Code	011-1021
Product Range	Eco Flex


PRODUCT SPECIFICATION

Dimensions	H2.00/W10.00mm
Cutting Interval	29.4mm
LED Pitch	4.2mm
Bend Direction	TV
Minimum Bend Radius	10mm
Colour Temperature	2400K
Bin/step	3 SDCM
CRI Rating	93.00
Lifetime	> 50,000 h
Operating Temp	Min = -25Â°C, Max = 40Â°C
IP Rating	IP20
Mounting	VHB
Connection	Hardwire tails or snap connectors

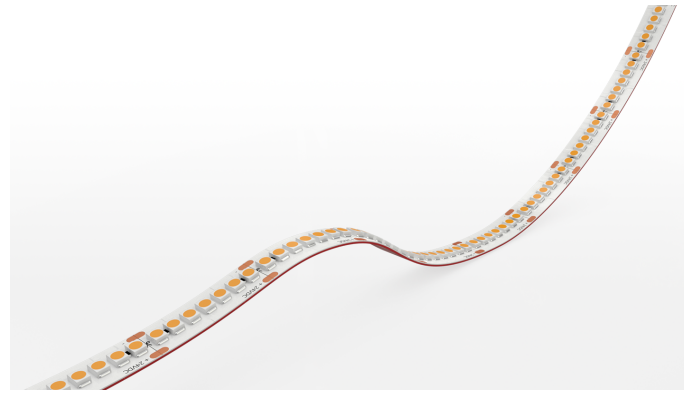

PERFORMANCE DATA (for 1000mm)

Power Consumption	19.20 W
Supply Voltage	24.00V DC
Supply Current	0.80 A
Luminous Flux	1630.00lm/m
Lumen Efficiency	85.00lm/w
Max Power Length	5000mm
Beam Angle	120Â°

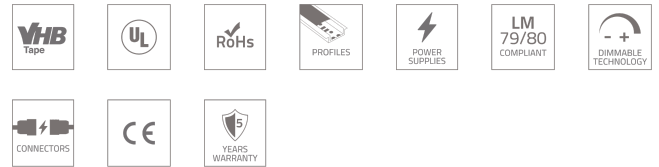

TECHNICAL DRAWING

