


PRODUCT INFORMATION

Description	ULTRA BRIGHT 60 RGBW-2700K 10mm IP20 24V 80CRI 14.4W 599LM 100mm Cut VHB 1000mm
Product Code	010-2401
Product Range	Specialist Flex

PRODUCT SPECIFICATION

Dimensions	H2.05/W10.00mm
Cutting Interval	100mm
LED Pitch	16.7mm
Bend Direction	TV
Minimum Bend Radius	10mm
Colour Temperature	RGBW 2700K
Bin/step	3SDCM
CRI Rating	80.00
Lifetime	> 50,000 h
Operating Temp	Min = -25Â°C, Max = 40Â°C
IP Rating	IP20
Mounting	VHB
Connection	Hardwire tails or male/female connectors

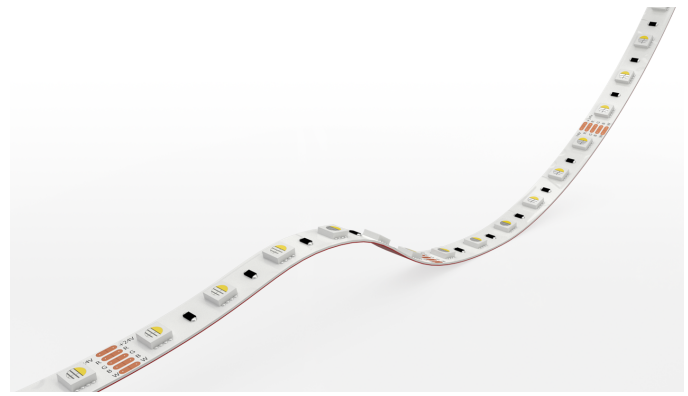


PERFORMANCE DATA (for 1000mm)

Power Consumption	14.40 W
Supply Voltage	24.00V DC
Supply Current	0.60 A
Luminous Flux	599.00lm/m
Lumen Efficiency	41.60lm/w
Max Power Length	5000mm
Beam Angle	120Â°



TECHNICAL DRAWING

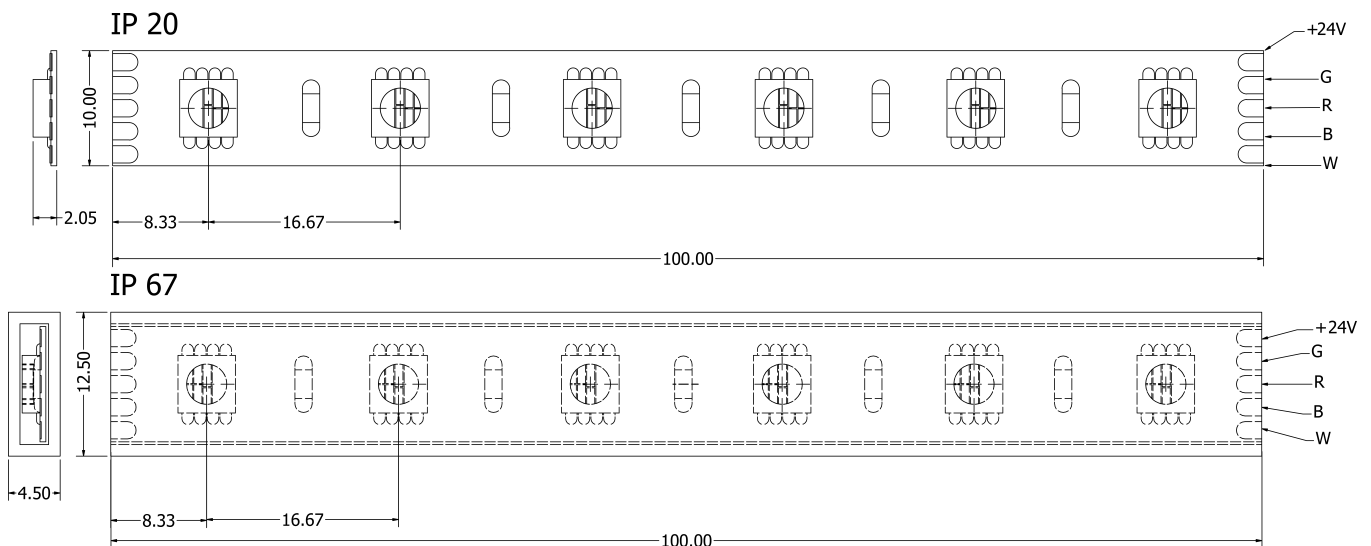


PRODUCT INFORMATION

Description	ULTRA BRIGHT 60 RGBW-4000K 10mm IP20 24V 80CRI 14.4W 616LM 100mm Cut VHB 1000mm
Product Code	010-2403
Product Range	Specialist Flex

PRODUCT SPECIFICATION

Dimensions	H2.05/W10.00mm
Cutting Interval	100mm
LED Pitch	16.7mm
Bend Direction	TV
Minimum Bend Radius	10mm
Colour Temperature	RGBW 4000K
Bin/step	3SDCM
CRI Rating	80.00
Lifetime	> 50,000 h
Operating Temp	Min = -25Â°C, Max = 40Â°C
IP Rating	IP20
Mounting	VHB
Connection	Hardwire tails or male/female connectors

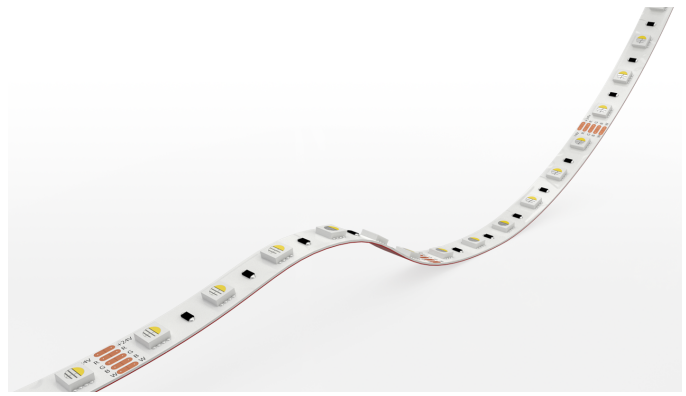


PERFORMANCE DATA (for 1000mm)

Power Consumption	14.40 W
Supply Voltage	24.00V DC
Supply Current	0.60 A
Luminous Flux	616.00lm/m
Lumen Efficiency	42.78lm/w
Max Power Length	5000mm
Beam Angle	120Â°



TECHNICAL DRAWING

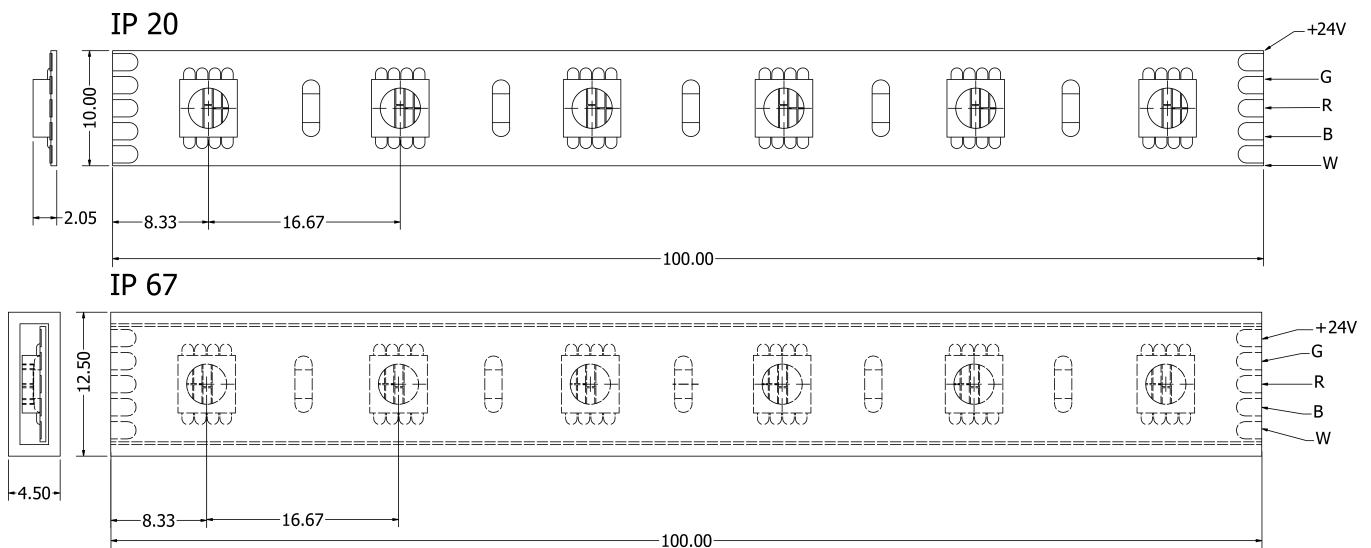

PRODUCT INFORMATION


Description	ULTRA BRIGHT 60 RGBW-3000K 10mm IP20 24V 80CRI 14.4W 609LM 100mm Cut VHB 1000mm
Product Code	010-2407
Product Range	Specialist Flex

PRODUCT SPECIFICATION

Dimensions	H2.05/W10.00mm
Cutting Interval	100mm
LED Pitch	16.7mm
Bend Direction	TV
Minimum Bend Radius	10mm
Colour Temperature	RGBW 3000K
Bin/step	3SDCM
CRI Rating	80.00
Lifetime	> 50,000 h
Operating Temp	Min = -25Â°C, Max = 40Â°C
IP Rating	IP20
Mounting	VHB
Connection	Hardwire tails or male/female connectors

PERFORMANCE DATA (for 1000mm)

Power Consumption	14.40 W
Supply Voltage	24.00V DC
Supply Current	0.60 A
Luminous Flux	609.00lm/m
Lumen Efficiency	42.29lm/w
Max Power Length	5000mm
Beam Angle	120Â°

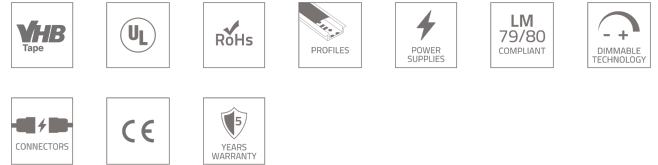


TECHNICAL DRAWING

PRODUCT INFORMATION

Description	ULTRA BRIGHT 96 RGBW-2700K 12mm IP20 24V 80CRI 23W 939LM 62.5mm Cut VHB 1000mm
Product Code	011-1101
Product Range	Specialist Flex

PRODUCT SPECIFICATION

Dimensions	H2.05/W12.00mm
Cutting Interval	62.5mm
LED Pitch	10.4mm
Bend Direction	TV
Minimum Bend Radius	10mm
Colour Temperature	RGBW-2700K
Bin/step	3SDCM
CRI Rating	80.00
Lifetime	> 50,000 h
Operating Temp	Min = -25Â°C, Max = 40Â°C
IP Rating	IP20
Mounting	VHB
Connection	Hardwire tails or male/female connectors

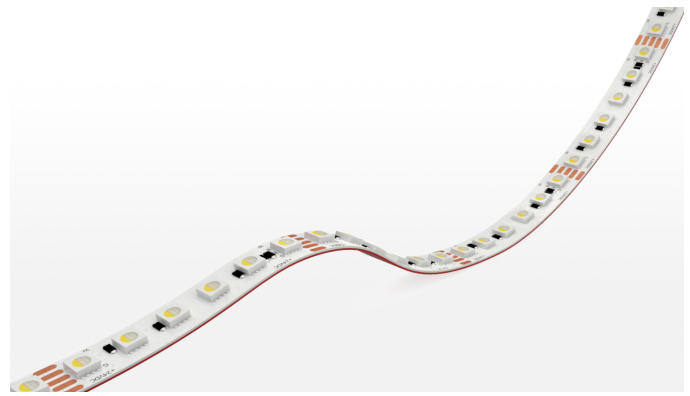


PERFORMANCE DATA (for 1000mm)

Power Consumption	23.00 W
Supply Voltage	24.00V DC
Supply Current	0.96 A
Luminous Flux	939.00lm/m
Lumen Efficiency	26.00lm/w
Max Power Length	5000mm
Beam Angle	120Â°



TECHNICAL DRAWING

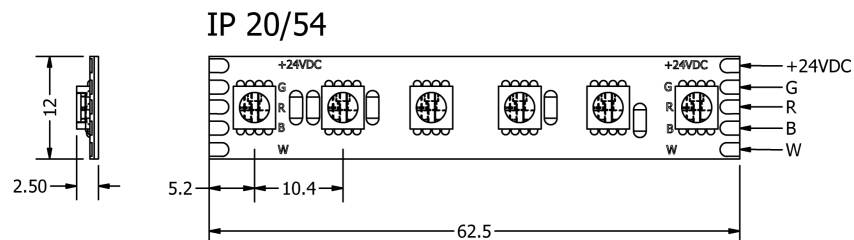


PRODUCT INFORMATION

Description	ULTRA BRIGHT 96 RGBW-2700K 12mm IP54 24V 80CRI 23W 939LM 62.5mm Cut VHB 1000mm
Product Code	011-1102
Product Range	Specialist Flex


PRODUCT SPECIFICATION

Dimensions	H2.05/W12.00mm
Cutting Interval	62.5mm
LED Pitch	10.4mm
Bend Direction	TV
Minimum Bend Radius	10mm
Colour Temperature	RGBW-2700K
Bin/step	3SDCM
CRI Rating	80.00
Lifetime	> 50,000 h
Operating Temp	Min = -25Â°C, Max = 40Â°C
IP Rating	IP54
Mounting	VHB
Connection	Hardwire tails or male/female connectors

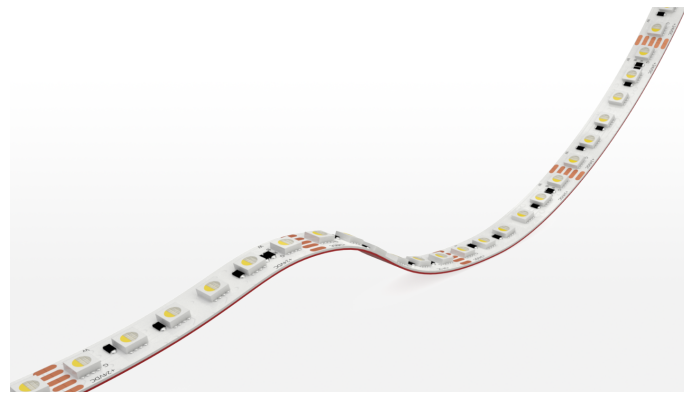


PERFORMANCE DATA (for 1000mm)

Power Consumption	23.00 W
Supply Voltage	24.00V DC
Supply Current	0.96 A
Luminous Flux	939.00lm/m
Lumen Efficiency	26.00lm/w
Max Power Length	5000mm
Beam Angle	120Â°

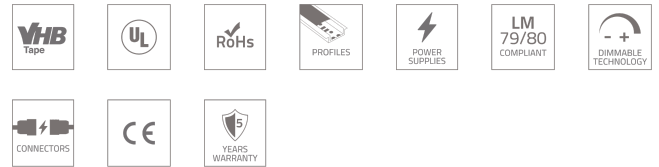

TECHNICAL DRAWING

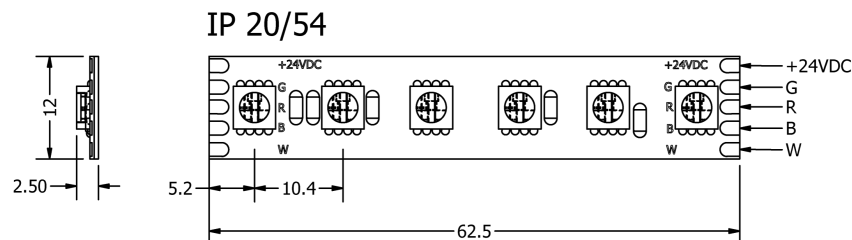


PRODUCT INFORMATION

Description	ULTRA BRIGHT 96 RGBW-3000K 12mm IP20 24V 80CRI 23W 966LM 62.5mm Cut VHB 1000mm
Product Code	011-1104
Product Range	Specialist Flex

PRODUCT SPECIFICATION

Dimensions	H2.05/W12.00mm
Cutting Interval	62.5mm
LED Pitch	10.4mm
Bend Direction	TV
Minimum Bend Radius	10mm
Colour Temperature	RGBW-3000K
Bin/step	3SDCM
CRI Rating	80.00
Lifetime	> 50,000 h
Operating Temp	Min = -25Â°C, Max = 40Â°C
IP Rating	IP20
Mounting	VHB
Connection	Hardwire tails or male/female connectors

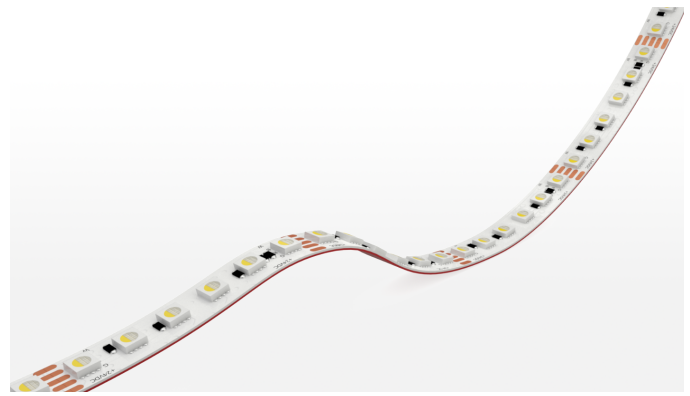

PERFORMANCE DATA (for 1000mm)

Power Consumption	23.00 W
Supply Voltage	24.00V DC
Supply Current	0.96 A
Luminous Flux	966.00lm/m
Lumen Efficiency	26.00lm/w
Max Power Length	5000mm
Beam Angle	120Â°



TECHNICAL DRAWING

