


TubeLED Mini Ambiance WarmDim



60mm (2.36") overall diameter. LED spotlight with remote driver. Available with monopoint mounting. Family of matching products also available.

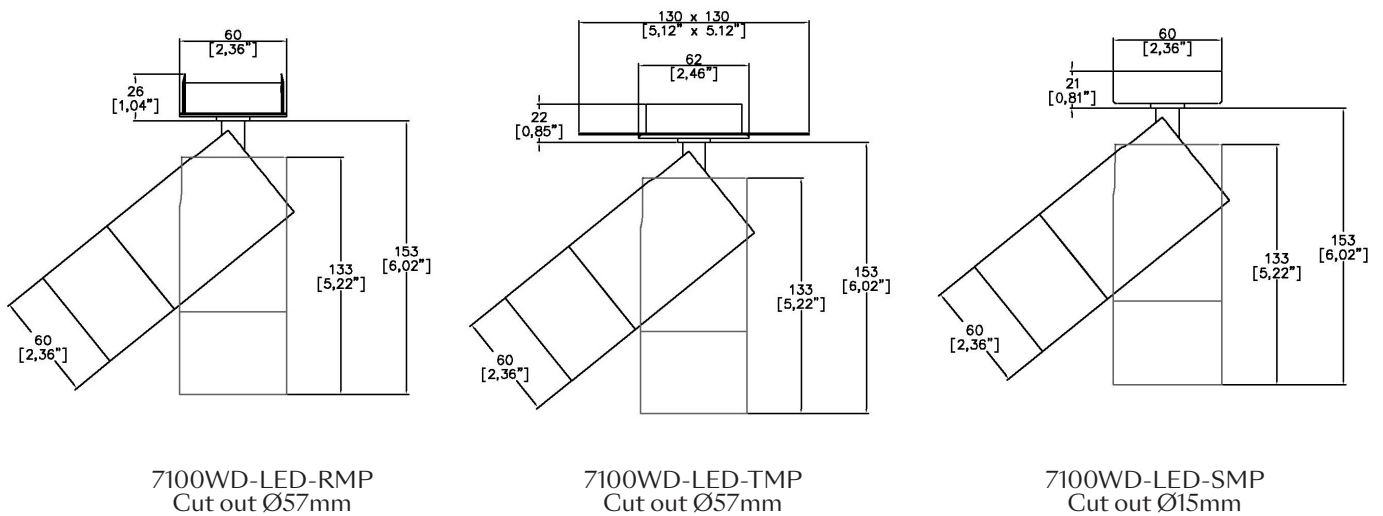

LED Source	LEDWD	LEDWD
CCT range 3000K-2000K	3000K	3000K
Drive Current (max per channel)	500mA	500mA
Power inc Driver Max	17.1W	17.1W
Beam Angle	28°	39°
Delivered Lumens	678	767
Delivered Intensity cd	2984	1998
Efficacy lm/w	40	45
Forward Volt (max per channel)	29.1V	29.1V
CRI	≥95 CRI	≥95 CRI

Project Ref: _____

Location Ref: _____

Fixture Order Code: **7100WD-LED** - [] - [] - [] - [] - [] - []

Fixture
7100WD-LED TubeLED Mini Ambiance WarmDim

CCT
2720 2700K - 2000K
3020 3000K - 2000K

Beam
28 28°
39 39°

Protocol

P Phase
A Analogue
D DALI
B Bluetooth***

Colour Insert

SN Satin Nickel
SG Satin Gold
CP Copper
BZ Bronze
(Blank) Not required standard black to be supplied

Finish

WH White
BK Black
RAL Custom RAL Finish*

Fixing

RMP Recessed Monopoint
TMP Trimless Monopoint
SMP Surface Monopoint

TubeLED Monopoint luminaires utilise remote drivers.

Technical Details

*Custom RAL code must be specified. Custom RAL colours can increase prices and lead times

Dimming. Whilst Lucent can offer the majority of its luminaires with various dimming options, it remains the responsibility of the specifier/installer to check and ensure compatibility of any control equipment used. Additional cabling may be required depending on the dimming protocol specified.

***Bluetooth (wireless) is the communication method. The exact dimming protocol must be confirmed to allow the selection of suitable drivers or bluetooth devices.

First Fix Requirement. Luminaire comprised of fixture body with ceiling trim and installation kit, which is to be fitted into the ceiling once finished. Ensure correct alignment of the installation kit before final assembly (see luminaire installation instructions for details)

IP Rating. Tested from underside of the ceiling

It is the policy of Lucent Lighting to continually review and improve its products and therefore reserve the right to change any details of product or withdraw specifications without prior notice.

Luminaires designed to comply with EN60598 and all other standards.

This specification sheet superseded all previous versions.

All intellectual property rights pertaining to the product described above and to this document are owned by or licensed to Lucent Lighting Ltd.

We reserve the right to take whatever action is necessary to protect those intellectual property rights.

Please notify Lucent Lighting Ltd of any inaccuracies immediately. E&OE