

PRODUCT INFORMATION

Description	DOMED NEON 2200K 12 x 29 SV 24V 81CRI 12W 415LM 83.34mm Cut 1000mm
Product Code	012-0540
Product Range	Specialist Neon

PRODUCT SPECIFICATION

Dimensions	H29.00/W12.00mm
Cutting Interval	83.34mm
LED Pitch	13.89mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	2200K
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -20°C, Max = 45°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds




PERFORMANCE DATA (for 1000mm)

Power Consumption	12.00 W
Supply Voltage	24.00V DC
Supply Current	0.50 A
Luminous Flux	415.00lm/m
Lumen Efficiency	35.00lm/w
Max Power Length	10000mm
Beam Angle	160°



TECHNICAL DRAWING

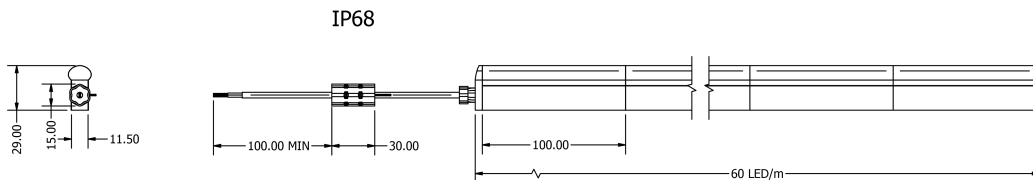

PRODUCT INFORMATION

Description	DOMED NEON 2700K 12 x 29 SV 24V 82CRI 12W 477LM 83.34mm Cut 1000mm
Product Code	012-0542
Product Range	Specialist Neon



PRODUCT SPECIFICATION


Dimensions	H29.00/W12.00mm
Cutting Interval	83.34mm
LED Pitch	13.89mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	2700K
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -20°C, Max = 45°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds

PERFORMANCE DATA (for 1000mm)

Power Consumption	12.00 W
Supply Voltage	24.00V DC
Supply Current	0.50 A
Luminous Flux	477.00lm/m
Lumen Efficiency	40.00lm/w
Max Power Length	10000mm
Beam Angle	160°



TECHNICAL DRAWING

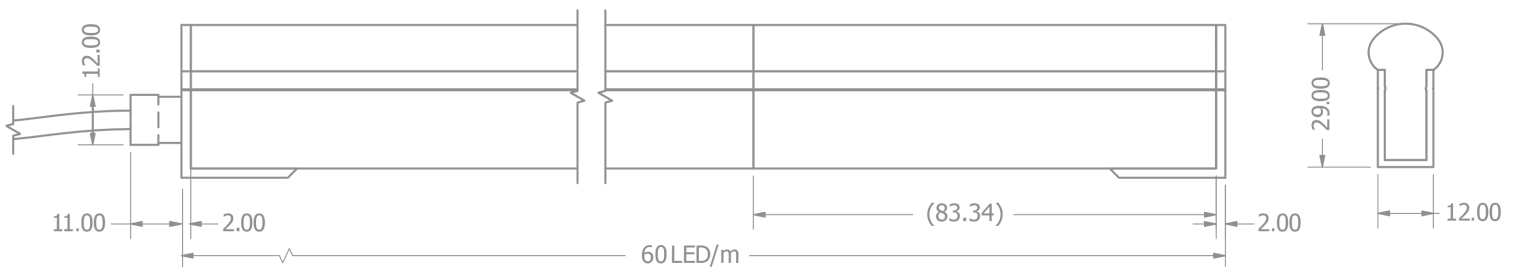

PRODUCT INFORMATION

Description	DOMED NEON 3000K 12 x 29 SV 24V 65CRI 12W 425LM 83.34mm Cut 1000mm
Product Code	012-0543
Product Range	Specialist Neon



PRODUCT SPECIFICATION


Dimensions	H29.00/W12.00mm
Cutting Interval	83.34mm
LED Pitch	13.89mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	3000K
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -20°C, Max = 45°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds

PERFORMANCE DATA (for 1000mm)

Power Consumption	12.00 W
Supply Voltage	24.00V DC
Supply Current	0.50 A
Luminous Flux	425.00lm/m
Lumen Efficiency	36.00lm/w
Max Power Length	10000mm
Beam Angle	160°



TECHNICAL DRAWING

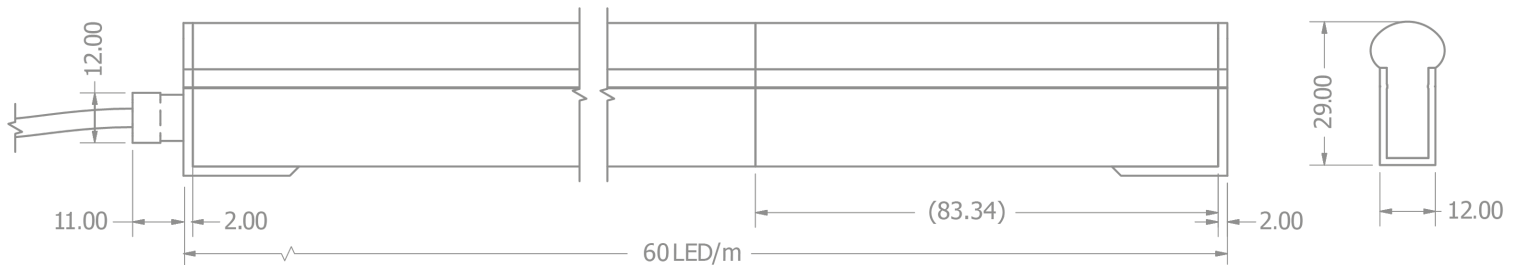

PRODUCT INFORMATION

Description	DOMED NEON 4000K 12 x 29 SV 24V 82CRI 12W 521LM 83.34mm Cut 1000mm
Product Code	012-0545
Product Range	Specialist Neon



PRODUCT SPECIFICATION


Dimensions	H29.00/W12.00mm
Cutting Interval	83.34mm
LED Pitch	13.89mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	4000K
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -20°C, Max = 45°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds

PERFORMANCE DATA (for 1000mm)

Power Consumption	12.00 W
Supply Voltage	24.00V DC
Supply Current	0.50 A
Luminous Flux	521.00lm/m
Lumen Efficiency	44.00lm/w
Max Power Length	10000mm
Beam Angle	160°



TECHNICAL DRAWING

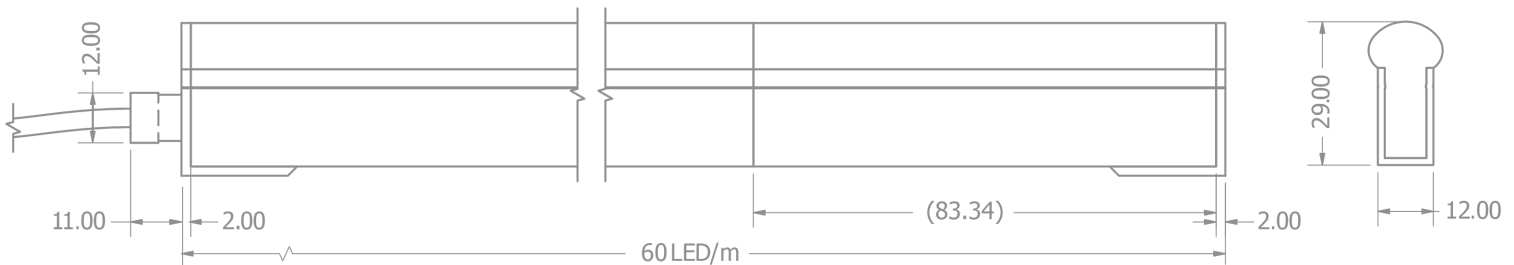

PRODUCT INFORMATION

Description	DOMED NEON 5700K 12 x 29 SV 24V 81CRI 12W 503LM 83.34mm Cut 1000mm
Product Code	012-0548
Product Range	Specialist Neon



PRODUCT SPECIFICATION

Dimensions	H29.00/W12.00mm
Cutting Interval	83.34mm
LED Pitch	13.89mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	5700K
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -20°C, Max = 45°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds

PERFORMANCE DATA (for 1000mm)

Power Consumption	12.00 W
Supply Voltage	24.00V DC
Supply Current	0.50 A
Luminous Flux	503.00lm/m
Lumen Efficiency	42.00lm/w
Max Power Length	10000mm
Beam Angle	160°



TECHNICAL DRAWING

