

PRODUCT INFORMATION

Description	DOMED NEON PIXEL RGBW+2700K 12 x 29 SV 24V 80CRI 15W 408LM 125mm Cut UCS2904 - 8PX/M, 16M PER DMX UNIVERSE 1000mm
Product Code	012-0712
Product Range	Specialist Neon

PRODUCT SPECIFICATION

Dimensions	H29.00/W12.00mm
Cutting Interval	125mm
LED Pitch	17.8mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	RGBW 2700K
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -20Â°C, Max = 45Â°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds
Control Protocol	UCS2904 - 8PX/M, 16M PER DMX UNIVERSE




PERFORMANCE DATA (for 1000mm)

Power Consumption	15.00 W
Supply Voltage	24.00V DC
Supply Current	0.62 A
Luminous Flux	408.00lm/m
Lumen Efficiency	28.00lm/w
Max Power Length	5000mm
Beam Angle	160Â°



TECHNICAL DRAWING

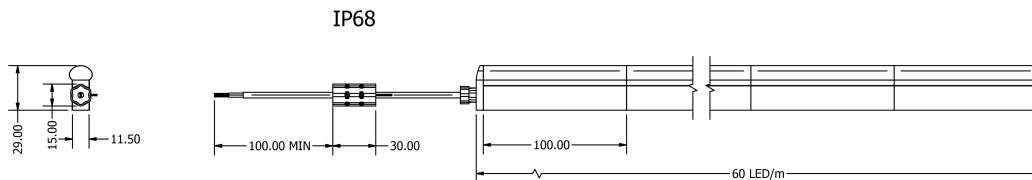

PRODUCT INFORMATION

Description	DOMED NEON PIXEL RGBW+3000K 12 x 29 SV 24V 80CRI 15W 409LM 125mm Cut UCS2904 - 8PX/M, 16M PER DMX UNIVERSE 1000mm
Product Code	012-0723
Product Range	Specialist Neon

PRODUCT SPECIFICATION

Dimensions	H29.00/W12.00mm
Cutting Interval	125mm
LED Pitch	17.8mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	RGBW 3000K
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -20Â°C, Max = 45Â°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds
Control Protocol	UCS2904 - 8PX/M, 16M PER DMX UNIVERSE




PERFORMANCE DATA (for 1000mm)

Power Consumption	15.00 W
Supply Voltage	24.00V DC
Supply Current	0.62 A
Luminous Flux	409.00lm/m
Lumen Efficiency	28.00lm/w
Max Power Length	5000mm
Beam Angle	160Â°



TECHNICAL DRAWING

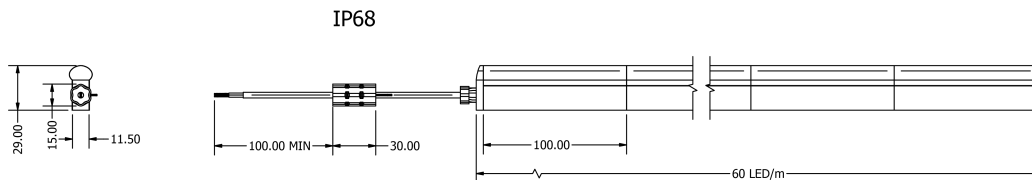

PRODUCT INFORMATION

Description	DOMED NEON PIXEL RGBW+4000K 12 x 29 SV 24V 80CRI 15W 450LM 125mm Cut UCS2904 - 8PX/M, 16M PER DMX UNIVERSE 1000mm
Product Code	012-0711
Product Range	Specialist Neon

PRODUCT SPECIFICATION

Dimensions	H29.00/W12.00mm
Cutting Interval	125mm
LED Pitch	17.8mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	RGBW 4000K
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -20°C, Max = 45°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds
Control Protocol	UCS2904 - 8PX/M, 16M PER DMX UNIVERSE



PERFORMANCE DATA (for 1000mm)

Power Consumption	15.00 W
Supply Voltage	24V DC
Supply Current	0.62 A
Luminous Flux	450.00lm/m
Lumen Efficiency	30.00lm/w
Max Power Length	5000mm
Beam Angle	160°



TECHNICAL DRAWING

