

PRODUCT INFORMATION

Description	DOMED NEON PIXEL RGB 12 x 29 SV 24V 12W 266LM 125mm Cut UCS2903 - 8PX/M, 21.25M PER DMX UNIVERSE 1000mm
Product Code	012-0710
Product Range	Specialist Neon

PRODUCT SPECIFICATION

Dimensions	H29.00/W12.00mm
Cutting Interval	125mm
LED Pitch	17.8mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	RGB
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -20Â°C, Max = 45Â°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds
Control Protocol	UCS2903 - 8PX/M, 21.25M PER DMX UNIVERSE




PERFORMANCE DATA (for 1000mm)

Power Consumption	12.00 W
Supply Voltage	24.00V DC
Supply Current	0.50 A
Luminous Flux	266.00lm/m
Lumen Efficiency	23.00lm/w
Max Power Length	10000mm
Beam Angle	160Â°



TECHNICAL DRAWING

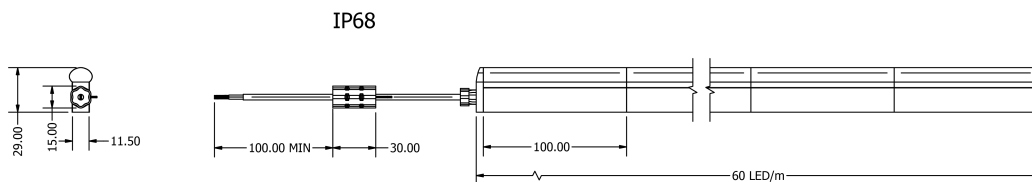

PRODUCT INFORMATION

Description	DOMED NEON PIXEL 2200-5700K 12 x 29 SV 24V 12W 260LM 100mm Cut UCS2903 - 10PX/M, 17M PER DMX UNIVERSE 1000mm
Product Code	012-0722
Product Range	Specialist Neon



PRODUCT SPECIFICATION


Dimensions	H29.00/W12.00mm
Cutting Interval	100mm
LED Pitch	16.7mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	2200-5700K
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -20°C, Max = 45°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds
Control Protocol	UCS2903 - 10PX/M, 17M PER DMX UNIVERSE

PERFORMANCE DATA (for 1000mm)

Power Consumption	12.00 W
Supply Voltage	24.00V DC
Supply Current	0.50 A
Luminous Flux	260.00lm/m
Lumen Efficiency	22.00lm/w
Max Power Length	10000mm
Beam Angle	160°



TECHNICAL DRAWING

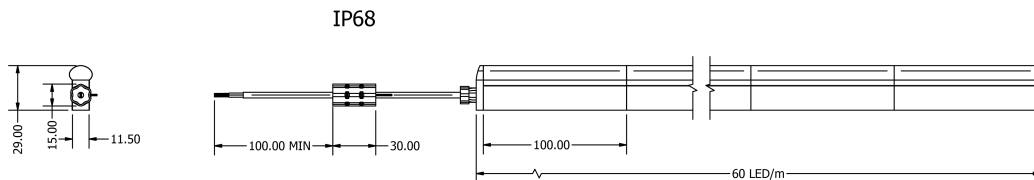

PRODUCT INFORMATION

Description	DOMED NEON PIXEL BLUE 12 x 29 SV 24V 12W 40LM 125mm Cut UCS2903 - 8PX/M, 21.25M PER DMX UNIVERSE 1000mm
Product Code	012-0715
Product Range	Specialist Neon



PRODUCT SPECIFICATION


Dimensions	H29.00/W12.00mm
Cutting Interval	125mm
LED Pitch	17.8mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	BLUE
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -20°C, Max = 45°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds
Control Protocol	UCS2903 - 8PX/M, 21.25M PER DMX UNIVERSE

PERFORMANCE DATA (for 1000mm)

Power Consumption	12.00 W
Supply Voltage	24.00V DC
Supply Current	0.50 A
Luminous Flux	40.00lm/m
Lumen Efficiency	4.00lm/w
Max Power Length	10000mm
Beam Angle	160°



TECHNICAL DRAWING

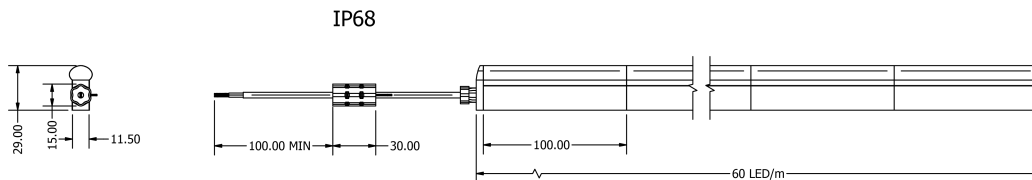

PRODUCT INFORMATION

Description	DOMED NEON PIXEL 3000K 12 x 29 SV 24V 80CRI 12W 350LM 125mm Cut UCS2903 - 8PX/M, 21.25M PER DMX UNIVERSE 1000mm
Product Code	012-0717
Product Range	Specialist Neon

PRODUCT SPECIFICATION

Dimensions	H29.00/W12.00mm
Cutting Interval	125mm
LED Pitch	17.8mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	3000K
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -20Â°C, Max = 45Â°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds
Control Protocol	UCS2903 - 8PX/M, 21.25M PER DMX UNIVERSE




PERFORMANCE DATA (for 1000mm)

Power Consumption	12.00 W
Supply Voltage	24.00V DC
Supply Current	0.50 A
Luminous Flux	350.00lm/m
Lumen Efficiency	30.00lm/w
Max Power Length	10000mm
Beam Angle	160Â°



TECHNICAL DRAWING

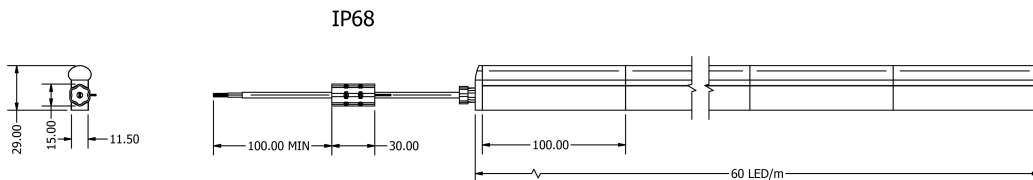

PRODUCT INFORMATION

Description	DOMED NEON PIXEL 5700K 12 x 29 SV 24V 80CRI 12W 350LM 125mm Cut UCS2903 - 8PX/M, 21.25M PER DMX UNIVERSE 1000mm
Product Code	012-0718
Product Range	Specialist Neon

PRODUCT SPECIFICATION

Dimensions	H29.00/W12.00mm
Cutting Interval	125mm
LED Pitch	17.8mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	5700K
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -20Â°C, Max = 45Â°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds
Control Protocol	UCS2903 - 8PX/M, 21.25M PER DMX UNIVERSE



PERFORMANCE DATA (for 1000mm)

Power Consumption	12.00 W
Supply Voltage	24.00V DC
Supply Current	0.50 A
Luminous Flux	350.00lm/m
Lumen Efficiency	30.00lm/w
Max Power Length	10000mm
Beam Angle	160Â°



TECHNICAL DRAWING

