

## PRODUCT INFORMATION

Description	DOMED NEON SILICONE PIXEL RGB   12 x 29   SV   24V   12W   240LM   125mm Cut   UCS2903 - 8PX/M, 21.25M PER DMX UNIVERSE   1000mm
Product Code	012-0710-SL
Product Range	Specialist Neon



## PRODUCT SPECIFICATION


Dimensions	H29.00/W12.00mm
Cutting Interval	125mm
LED Pitch	17.8mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	RGB
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -40°C, Max = 55°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds
Control Protocol	UCS2903 - 8PX/M, 21.25M PER DMX UNIVERSE

## PERFORMANCE DATA (for 1000mm)

Power Consumption	12.00 W
Supply Voltage	24.00V DC
Supply Current	0.50 A
Luminous Flux	240.00lm/m
Lumen Efficiency	20.00lm/w
Max Power Length	15000mm
Beam Angle	160°



## TECHNICAL DRAWING

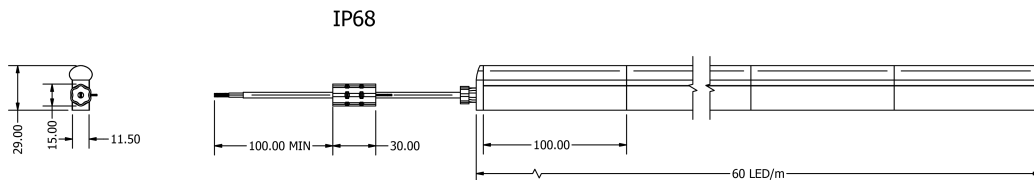

## PRODUCT INFORMATION

Description	DOMED NEON SILICONE PIXEL BLUE   12 x 29   SV   24V   12W   80LM   125mm Cut   UCS2903 - 8PX/M, 21.25M PER DMX UNIVERSE   1000mm
Product Code	012-0715-SL
Product Range	Specialist Neon



## PRODUCT SPECIFICATION


Dimensions	H29.00/W12.00mm
Cutting Interval	125mm
LED Pitch	17.8mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	BLUE
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -40°C, Max = 55°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds
Control Protocol	UCS2903 - 8PX/M, 21.25M PER DMX UNIVERSE

## PERFORMANCE DATA (for 1000mm)

Power Consumption	12.00 W
Supply Voltage	24.00V DC
Supply Current	0.50 A
Luminous Flux	80.00lm/m
Lumen Efficiency	7.00lm/w
Max Power Length	15000mm
Beam Angle	160°



## TECHNICAL DRAWING

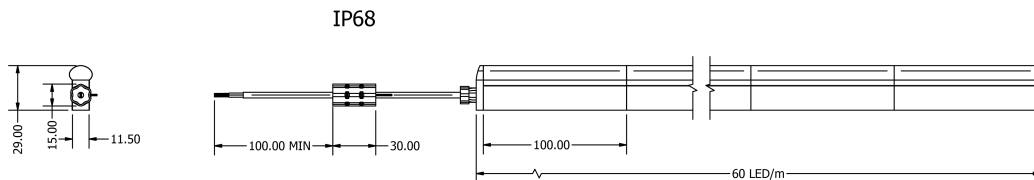

## PRODUCT INFORMATION

Description	DOMED NEON SILICONE PIXEL 3000K   12 x 29   SV   24V   80CRI   12W   400LM   125mm Cut   UCS2903 - 8PX/M, 21.25M PER DMX UNIVERSE   1000mm
Product Code	012-0717-SL
Product Range	Specialist Neon



## PRODUCT SPECIFICATION


Dimensions	H29.00/W12.00mm
Cutting Interval	125mm
LED Pitch	17.8mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	3000K
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -40°C, Max = 55°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds
Control Protocol	UCS2903 - 8PX/M, 21.25M PER DMX UNIVERSE

## PERFORMANCE DATA (for 1000mm)

Power Consumption	12.00 W
Supply Voltage	24.00V DC
Supply Current	0.50 A
Luminous Flux	400.00lm/m
Lumen Efficiency	34.00lm/w
Max Power Length	15000mm
Beam Angle	160°



## TECHNICAL DRAWING

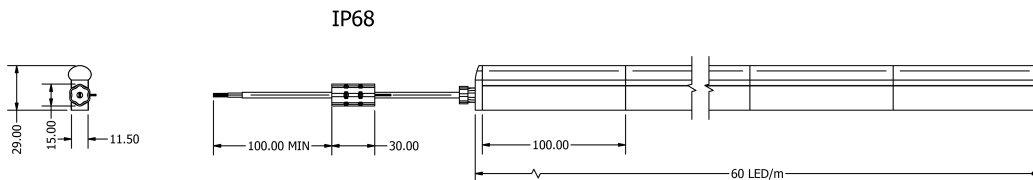

## PRODUCT INFORMATION

Description	DOMED NEON SILICONE PIXEL 5700K   12 x 29   SV   24V   80CRI   12W   400LM   125mm Cut   UCS2903 - 8PX/M, 21.25M PER DMX UNIVERSE   1000mm
Product Code	012-0718-SL
Product Range	Specialist Neon



## PRODUCT SPECIFICATION


Dimensions	H29.00/W12.00mm
Cutting Interval	125mm
LED Pitch	17.8mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	5700K
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -40°C, Max = 55°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds
Control Protocol	UCS2903 - 8PX/M, 21.25M PER DMX UNIVERSE

## PERFORMANCE DATA (for 1000mm)

Power Consumption	12.00 W
Supply Voltage	24.00V DC
Supply Current	0.50 A
Luminous Flux	400.00lm/m
Lumen Efficiency	34.00lm/w
Max Power Length	15000mm
Beam Angle	160°



## TECHNICAL DRAWING

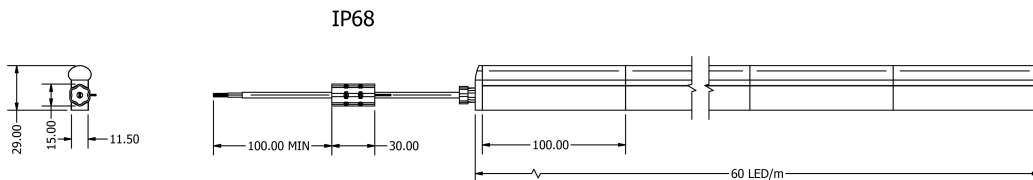

## PRODUCT INFORMATION

Description	DOMED NEON SILICONE PIXEL 2500-5000K   12 x 29   SV   24V   80CRI   12W   380LM   100mm Cut   UCS2903 - 10PX/M, 17M PER DMX UNIVERSE   1000mm
Product Code	012-0719-SL
Product Range	Specialist Neon

## PRODUCT SPECIFICATION

Dimensions	H29.00/W12.00mm
Cutting Interval	100mm
LED Pitch	16.7mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	2500-5000K
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -40°C, Max = 55°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds
Control Protocol	UCS2903 - 10PX/M, 17M PER DMX UNIVERSE



## PERFORMANCE DATA (for 1000mm)

Power Consumption	12.00 W
Supply Voltage	24.00V DC
Supply Current	0.50 A
Luminous Flux	380.00lm/m
Lumen Efficiency	32.00lm/w
Max Power Length	15000mm
Beam Angle	160°



## TECHNICAL DRAWING

