

PRODUCT INFORMATION

Description	DOMED NEON SILICONE RED 12 x 29 SV 24V 7.2W 166LM 125mm Cut 1000mm
Product Code	012-0550-SL
Product Range	Specialist Neon

PRODUCT SPECIFICATION

Dimensions	H29.00/W12.00mm
Cutting Interval	125mm
LED Pitch	13.89mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	RED
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -40°C, Max = 55°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds




PERFORMANCE DATA (for 1000mm)

Power Consumption	7.20 W
Supply Voltage	24.00V DC
Supply Current	0.30 A
Luminous Flux	166.00lm/m
Lumen Efficiency	24.00lm/w
Max Power Length	15000mm
Beam Angle	160°



TECHNICAL DRAWING

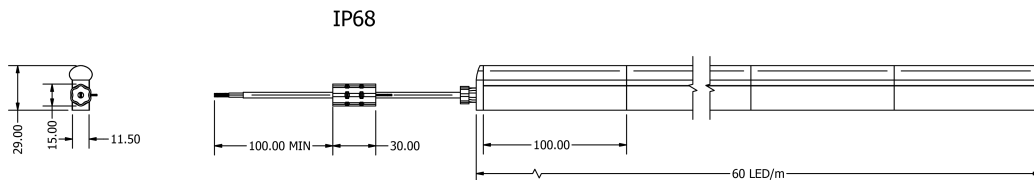

PRODUCT INFORMATION

Description	DOMED NEON SILICONE GREEN 12 x 29 SV 24V 12W 430LM 83.34mm Cut 1000mm
Product Code	012-0551-SL
Product Range	Specialist Neon

PRODUCT SPECIFICATION

Dimensions	H29.00/W12.00mm
Cutting Interval	83.34mm
LED Pitch	13.89mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	GREEN
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -40°C, Max = 55°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds




PERFORMANCE DATA (for 1000mm)

Power Consumption	12.00 W
Supply Voltage	24.00V DC
Supply Current	0.50 A
Luminous Flux	430.00lm/m
Lumen Efficiency	36.00lm/w
Max Power Length	15000mm
Beam Angle	160°



TECHNICAL DRAWING

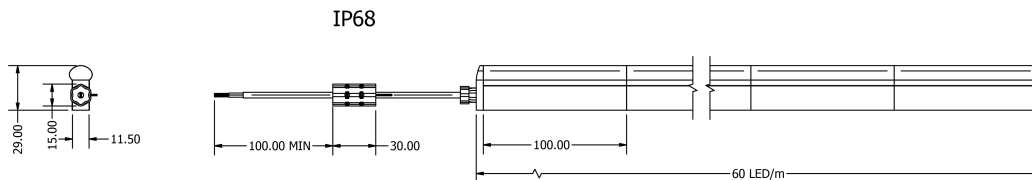

PRODUCT INFORMATION

Description	DOMED NEON SILICONE BLUE 12 x 29 SV 24V 12W 91LM 83.34mm Cut 1000mm
Product Code	012-0552-SL
Product Range	Specialist Neon

PRODUCT SPECIFICATION

Dimensions	H29.00/W12.00mm
Cutting Interval	83.34mm
LED Pitch	13.89mm
Bend Direction	SV
Minimum Bend Radius	120mm
Colour Temperature	BLUE
Bin/step	3SDCM
Lifetime	> 50000 h
Operating Temp	Min = -40°C, Max = 55°C
IP Rating	IP68
Mounting	Aluminium profile
Connection	Hardwire tails Injection Moulds



PERFORMANCE DATA (for 1000mm)

Power Consumption	12.00 W
Supply Voltage	24.00V DC
Supply Current	0.50 A
Luminous Flux	91.00lm/m
Lumen Efficiency	8.00lm/w
Max Power Length	15000mm
Beam Angle	160°



TECHNICAL DRAWING

