


## PRODUCT INFORMATION

Description FLEXI GRAZER DOMED SET ASYMMETRIC  
110 x 70° | 2500K | 30mm | IP67 | 30  
LED/M | 24V | 80CRI | 20W | 1150LM |  
1050mm

Product Code 085-0411

Product Range Flexi Grazer Set

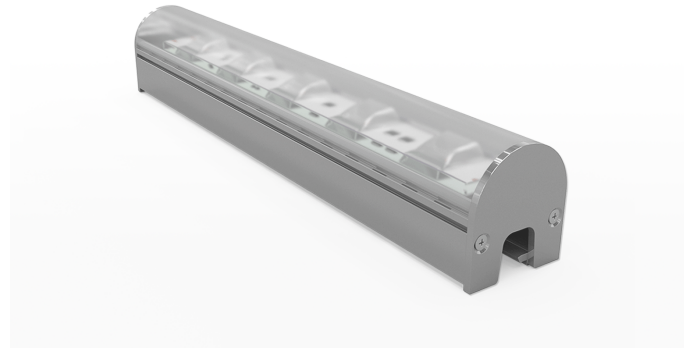

## PRODUCT SPECIFICATION

Dimensions H37.00/W30.00mm

LED Pitch 33.33mm

Bend Direction TV

Colour Temperature 2500K

Bin/step 3SDCM

CRI Rating 80.00

Lifetime > 30,000 h

Operating Temp MIN = -25°C, MAX = 45°C

IP Rating IP67

Mounting MOUNTING CLIPS

Connection HARDWIRE TALES OR  
MALE/FEMALE CONNECTORS

## PERFORMANCE DATA

Power Consumption 20.00 W

Supply Voltage 24.00V DC

Supply Current 0.83 A

Luminous Flux 1150.00lm

Lumen Efficiency 58.00lm/w


Max Power Length 5000mm

Beam Angle 110 x 70°



## TECHNICAL DRAWING

IP67

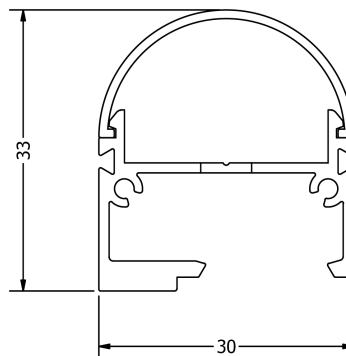


## PRODUCT INFORMATION

Description FLEXI GRAZER DOMED SET ASYMMETRIC  
110 x 70° | 2700K | 30mm | IP67 | 30  
LED/M | 24V | 80CRI | 20W | 1414LM |  
1050mm

Product Code 085-0412

Product Range Flexi Grazer Set

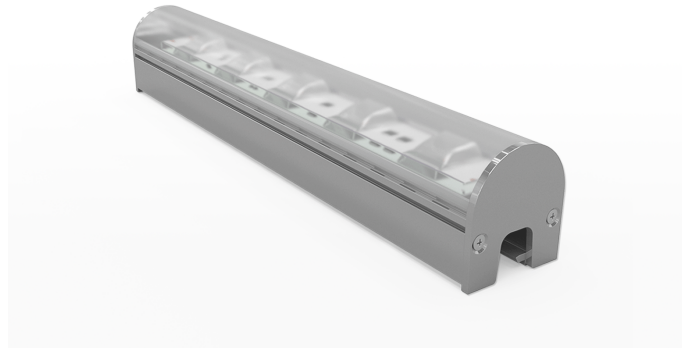

## PRODUCT SPECIFICATION

Dimensions H37.00/W30.00mm

LED Pitch 33.33mm

Bend Direction TV

Colour Temperature 2700K

Bin/step 3SDCM

CRI Rating 80.00

Lifetime > 30,000 h

Operating Temp MIN = -25°C, MAX = 45°C

IP Rating IP67

Mounting MOUNTING CLIPS

Connection HARDWIRE TAILS OR  
MALE/FEMALE CONNECTORS

## PERFORMANCE DATA

Power Consumption 20.00 W

Supply Voltage 24.00V DC

Supply Current 0.83 A

Luminous Flux 1414.00lm

Lumen Efficiency 71.00lm/w


Max Power Length 5000mm

Beam Angle 110 x 70°



## TECHNICAL DRAWING

IP67

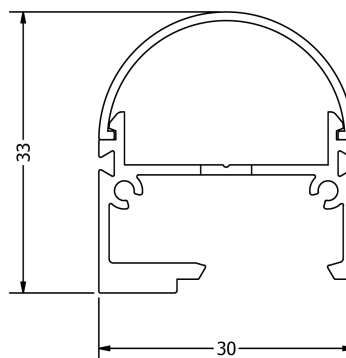

## PRODUCT INFORMATION

Description FLEXI GRAZER DOMED SET ASYMMETRIC  
110 x 70° | 3000K | 30mm | IP67 | 30  
LED/M | 24V | 80CRI | 20W | 1476LM |  
1050mm

Product Code 085-0413

Product Range Flexi Grazer Set



## PRODUCT SPECIFICATION

Dimensions H37.00/W30.00mm

LED Pitch 33.33mm

Bend Direction TV

Colour Temperature 3000K

Bin/step 3SDCM

CRI Rating 80.00

Lifetime > 30,000 h

Operating Temp MIN = -25°C, MAX = 45°C

IP Rating IP67

Mounting MOUNTING CLIPS

Connection HARDWIRE TAILS OR  
MALE/FEMALE CONNECTORS

## PERFORMANCE DATA

Power Consumption 20.00 W

Supply Voltage 24.00V DC

Supply Current 0.83 A

Luminous Flux 1476.00lm

Lumen Efficiency 74.00lm/w


Max Power Length 5000mm

Beam Angle 110 x 70°



## TECHNICAL DRAWING

IP67

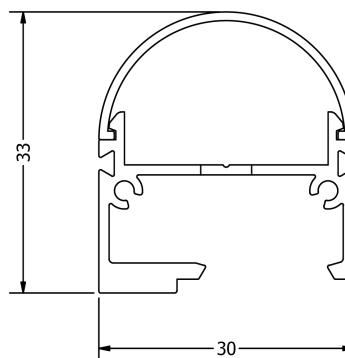

## PRODUCT INFORMATION

Description FLEXI GRAZER DOMED SET ASYMMETRIC  
110 x 70° | 4000K | 30mm | IP67 | 30  
LED/M | 24V | 80CRI | 20W | 1592LM |  
1050mm

Product Code 085-0414

Product Range Flexi Grazer Set



## PRODUCT SPECIFICATION

Dimensions H37.00/W30.00mm

LED Pitch 33.33mm

Bend Direction TV

Colour Temperature 4000K

Bin/step 3SDCM

CRI Rating 80.00

Lifetime > 30,000 h

Operating Temp MIN = -25°C, MAX = 45°C

IP Rating IP67

Mounting MOUNTING CLIPS

Connection HARDWIRE TAILS OR  
MALE/FEMALE CONNECTORS

## PERFORMANCE DATA

Power Consumption 20.00 W

Supply Voltage 24.00V DC

Supply Current 0.83 A

Luminous Flux 1592.00lm

Lumen Efficiency 80.00lm/w

Max Power Length 5000mm

Beam Angle 110 x 70°



## TECHNICAL DRAWING

IP67

