


PRODUCT INFORMATION

Description FLEXI GRAZER DOMED SET ASYMMETRIC
110 x 70° | 2500K | 30mm | IP67 | 30
LED/M | 24V | 80CRI | 40W | 2300LM |
2050mm

Product Code 085-0421

Product Range Flexi Grazer Set

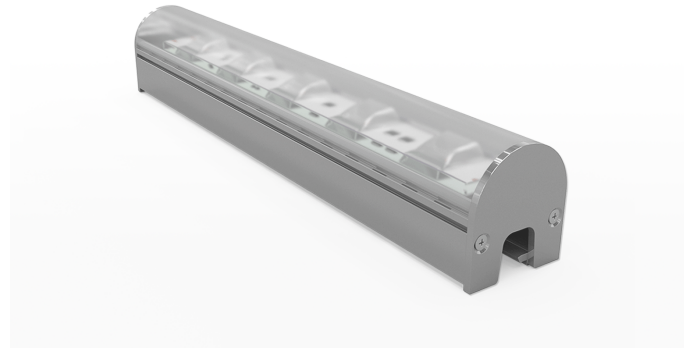

PRODUCT SPECIFICATION

Dimensions H37.00/W30.00mm

LED Pitch 33.33mm

Bend Direction TV

Colour Temperature 2500K

Bin/step 3SDCM

CRI Rating 80.00

Lifetime > 30,000 h

Operating Temp MIN = -25°C, MAX = 45°C

IP Rating IP67

Mounting MOUNTING CLIPS

Connection HARDWIRE TAILS OR
MALE/FEMALE CONNECTORS

PERFORMANCE DATA

Power Consumption 40.00 W

Supply Voltage 24.00V DC

Supply Current 1.67 A

Luminous Flux 2300.00lm

Lumen Efficiency 58.00lm/w


Max Power Length 5000mm

Beam Angle 110 x 70°



TECHNICAL DRAWING

IP67

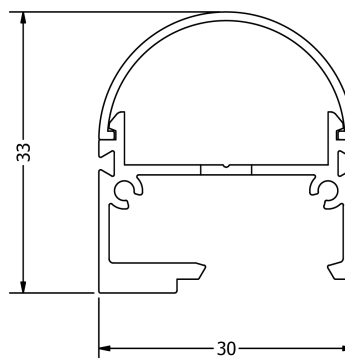

PRODUCT INFORMATION

Description	FLEXI GRAZER DOMED SET ASYMMETRIC 110 x 70° 2700K 30mm IP67 30 LED/M 24V 80CRI 40W 2828LM 2050mm
Product Code	085-0422
Product Range	Flexi Grazer Set



PRODUCT SPECIFICATION

Dimensions	H37.00/W30.00mm
LED Pitch	33.33mm
Bend Direction	TV
Colour Temperature	2700K
Bin/step	3SDCM
CRI Rating	80.00
Lifetime	> 30,000 h
Operating Temp	MIN = -25°C, MAX = 45°C
IP Rating	IP67
Mounting	MOUNTING CLIPS
Connection	HARDWIRE TAILS OR MALE/FEMALE CONNECTORS


PERFORMANCE DATA

Power Consumption	40.00 W
Supply Voltage	24.00V DC
Supply Current	1.67 A
Luminous Flux	2828.00lm
Lumen Efficiency	71.00lm/w
Max Power Length	5000mm
Beam Angle	110 x 70°



TECHNICAL DRAWING

IP67

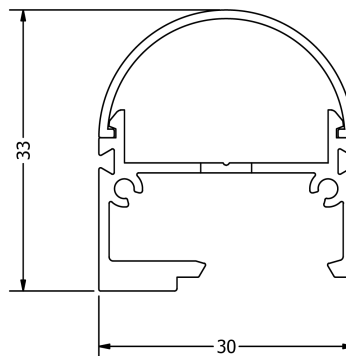

PRODUCT INFORMATION

Description FLEXI GRAZER DOMED SET ASYMMETRIC
110 x 70° | 3000K | 30mm | IP67 | 30
LED/M | 24V | 80CRI | 40W | 2952LM |
2050mm

Product Code 085-0423

Product Range Flexi Grazer Set



PRODUCT SPECIFICATION

Dimensions H37.00/W30.00mm

LED Pitch 33.33mm

Bend Direction TV

Colour Temperature 3000K

Bin/step 3SDCM

CRI Rating 80.00

Lifetime > 30,000 h

Operating Temp MIN = -25°C, MAX = 45°C

IP Rating IP67

Mounting MOUNTING CLIPS

Connection HARDWIRE TAILS OR
MALE/FEMALE CONNECTORS

PERFORMANCE DATA

Power Consumption 40.00 W

Supply Voltage 24.00V DC

Supply Current 1.67 A

Luminous Flux 2952.00lm

Lumen Efficiency 74.00lm/w


Max Power Length 5000mm

Beam Angle 110 x 70°



TECHNICAL DRAWING

IP67

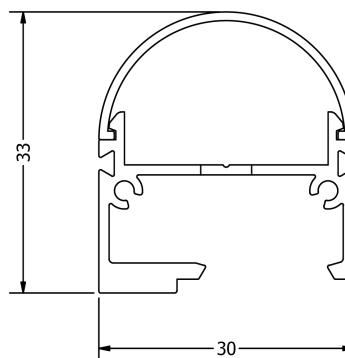

PRODUCT INFORMATION

Description FLEXI GRAZER DOMED SET ASYMMETRIC
110 x 70° | 4000K | 30mm | IP67 | 30
LED/M | 24V | 80CRI | 40W | 3184LM |
2050mm

Product Code 085-0424

Product Range Flexi Grazer Set



PRODUCT SPECIFICATION

Dimensions H37.00/W30.00mm

LED Pitch 33.33mm

Bend Direction TV

Colour Temperature 4000K

Bin/step 3SDCM

CRI Rating 80.00

Lifetime > 30,000 h

Operating Temp MIN = -25°C, MAX = 45°C

IP Rating IP67

Mounting MOUNTING CLIPS

Connection HARDWIRE TALES OR
MALE/FEMALE CONNECTORS

PERFORMANCE DATA

Power Consumption 40.00 W

Supply Voltage 24.00V DC

Supply Current 1.67 A

Luminous Flux 3184.00lm

Lumen Efficiency 80.00lm/w

Max Power Length 5000mm

Beam Angle 110 x 70°



TECHNICAL DRAWING

IP67

