


PRODUCT INFORMATION

Description	FLEXI GRAZER DOMED SET NARROW 20° 2500K 30mm IP67 42 LED/M 24V 80CRI 10W 1007LM 500mm
Product Code	085-0110
Product Range	Flexi Grazer Set

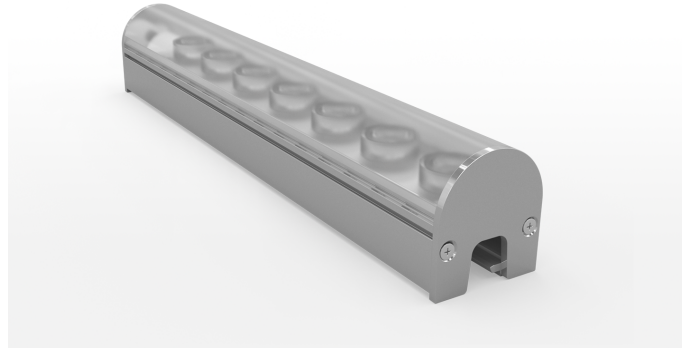

PRODUCT SPECIFICATION

Dimensions	H37.00/W30.00mm
LED Pitch	23.81mm
Bend Direction	TV
Colour Temperature	2500K
Bin/step	3SDCM
CRI Rating	80.00
Lifetime	> 30,000 h
Operating Temp	MIN = -25°C, MAX = 45°C
IP Rating	IP67
Mounting	MOUNTING CLIPS
Connection	HARDWIRE TAILS OR MALE/FEMALE CONNECTORS


PERFORMANCE DATA

Power Consumption	10.00 W
Supply Voltage	24.00V DC
Supply Current	0.42 A
Luminous Flux	1007.00lm
Lumen Efficiency	101.00lm/w
Max Power Length	5000mm
Beam Angle	20°




TECHNICAL DRAWING

IP67

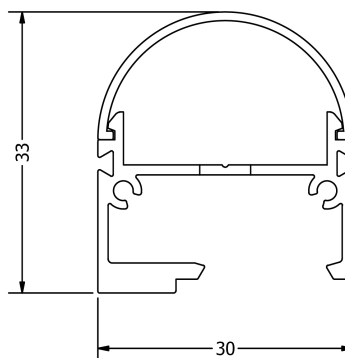

PRODUCT INFORMATION

Description	FLEXI GRAZER DOMED SET NARROW 20° 3000K 30mm IP67 42 LED/M 24V 80CRI 10W 1101LM 500mm
Product Code	085-0112
Product Range	Flexi Grazer Set

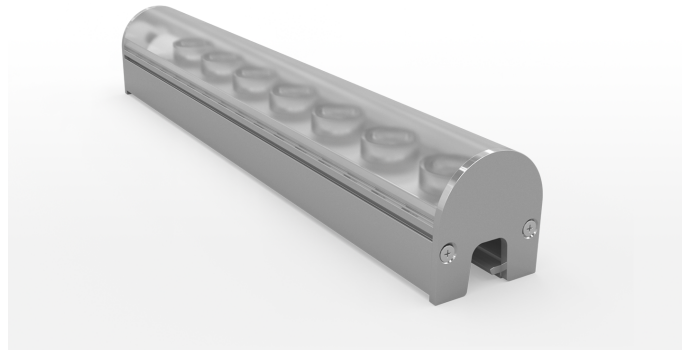

PRODUCT SPECIFICATION

Dimensions	H37.00/W30.00mm
LED Pitch	23.81mm
Bend Direction	TV
Colour Temperature	3000K
Bin/step	3SDCM
CRI Rating	80.00
Lifetime	> 30,000 h
Operating Temp	MIN = -25°C, MAX = 45°C
IP Rating	IP67
Mounting	MOUNTING CLIPS
Connection	HARDWIRE TAILS OR MALE/FEMALE CONNECTORS


PERFORMANCE DATA

Power Consumption	10.00 W
Supply Voltage	24.00V DC
Supply Current	0.42 A
Luminous Flux	1101.00lm
Lumen Efficiency	110.00lm/w
Max Power Length	5000mm
Beam Angle	20°




TECHNICAL DRAWING

IP67

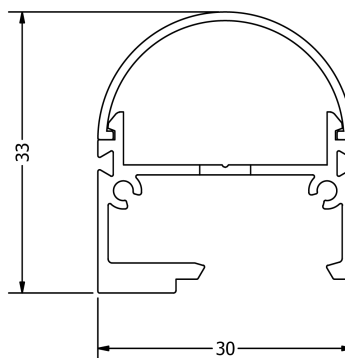

PRODUCT INFORMATION

Description	FLEXI GRAZER DOMED SET NARROW 20° 4000K 30mm IP67 42 LED/M 24V 80CRI 10W 1216LM 500mm
Product Code	085-0113
Product Range	Flexi Grazer Set

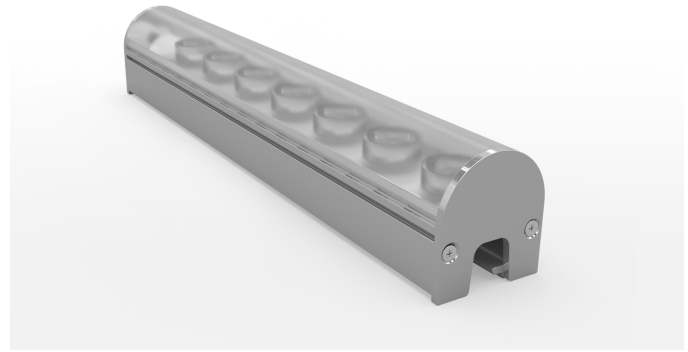

PRODUCT SPECIFICATION

Dimensions	H37.00/W30.00mm
LED Pitch	23.81mm
Bend Direction	TV
Colour Temperature	4000K
Bin/step	3SDCM
CRI Rating	80.00
Lifetime	> 30,000 h
Operating Temp	MIN = -25°C, MAX = 45°C
IP Rating	IP67
Mounting	MOUNTING CLIPS
Connection	HARDWIRE TAILS OR MALE/FEMALE CONNECTORS

PERFORMANCE DATA

Power Consumption	10.00 W
Supply Voltage	24.00V DC
Supply Current	0.42 A
Luminous Flux	1216.00lm
Lumen Efficiency	122.00lm/w
Max Power Length	5000mm
Beam Angle	20°



TECHNICAL DRAWING

IP67

