

PRODUCT INFORMATION

Description THERMO LINE 80 | 2100K | 12.50mm | IP67 | 24V | 83CRI | 4.8W | 495LM | 100mm Cut | Saddle Clips Included | 1000mm

Product Code 011-8806

Product Range Specialist Flex

PRODUCT SPECIFICATION

Dimensions H4.00/W12.50mm

Cutting Interval 100mm

LED Pitch 12.5mm

Bend Direction TV

Minimum Bend Radius 20mm

Colour Temperature 2100K

Bin/step 3SDCM

CRI Rating 83.00


Lifetime > 50,000 h

Operating Temp -40°C - 105°C

IP Rating IP67

Mounting Saddle Clips Included

Connection Hardwire tails

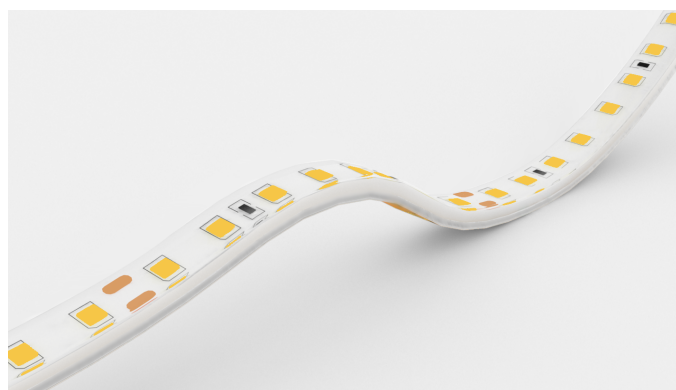

PERFORMANCE DATA (for 1000mm)

Power Consumption 4.80 W

Supply Voltage 24V DC


Supply Current 0.20 A

Luminous Flux 495.00lm/m


Lumen Efficiency 103.12lm/w

Max Power Length 5000mm

Beam Angle 120°

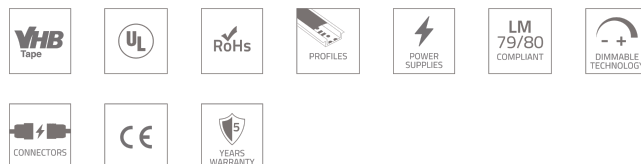

TECHNICAL DRAWING

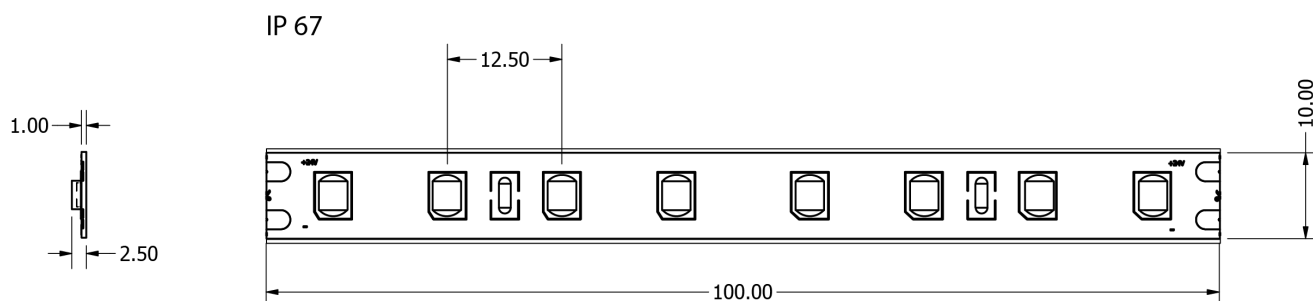

PRODUCT INFORMATION


Description	THERMO LINE 80 2400K 12.50mm IP67 24V 87CRI 4.8W 572LM 100mm Cut Saddle Clips Included 1000mm
-------------	---

Product Code 011-8807

Product Range Specialist Flex


PRODUCT SPECIFICATION

Dimensions	H4.00/W12.50mm
Cutting Interval	100mm
LED Pitch	12.5mm
Bend Direction	TV
Minimum Bend Radius	20mm
Colour Temperature	2400K
Bin/step	3SDCM
CRI Rating	87.00
Lifetime	> 50,000 h
Operating Temp	-40°C - 105°C
IP Rating	IP67
Mounting	Saddle Clips Included
Connection	Hardwire tails

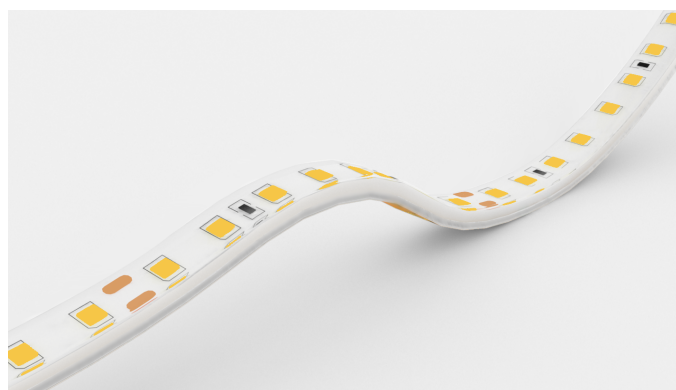


PERFORMANCE DATA (for 1000mm)

Power Consumption	4.80 W
Supply Voltage	24V DC
Supply Current	0.20 A
Luminous Flux	572.00lm/m
Lumen Efficiency	119.17lm/w
Max Power Length	5000mm
Beam Angle	120°

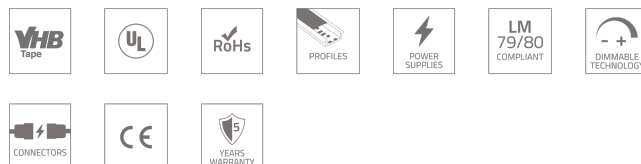

TECHNICAL DRAWING

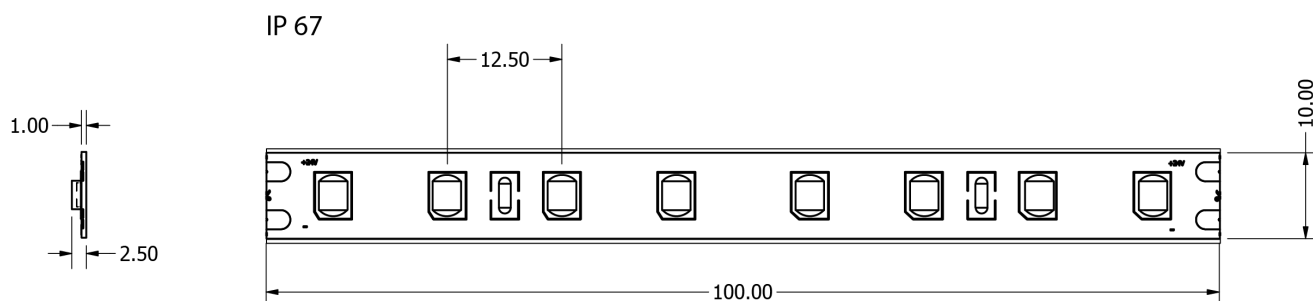


PRODUCT INFORMATION

Description THERMO LINE 80 | 2700K | 12.50mm | IP67 | 24V | 86CRI | 4.8W | 611LM | 100mm Cut | Saddle Clips Included | 1000mm

Product Code 011-8801

Product Range Specialist Flex

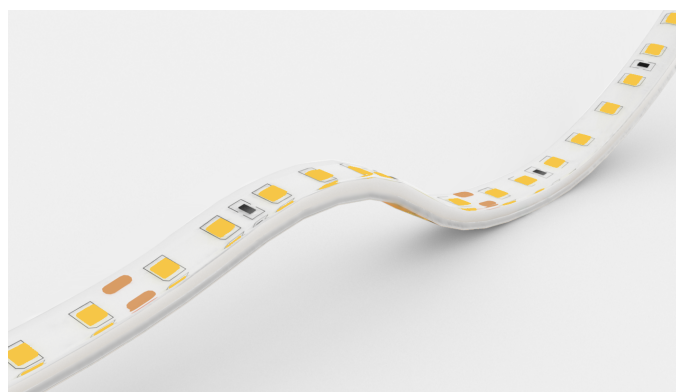

PRODUCT SPECIFICATION

Dimensions H4.00/W12.50mm

Cutting Interval 100mm

LED Pitch 12.5mm

Bend Direction TV

Minimum Bend Radius 20mm

Colour Temperature 2700K

Bin/step 3SDCM

CRI Rating 86.00

Lifetime > 50,000 h

Operating Temp -40°C - 105°C

IP Rating IP67

Mounting Saddle Clips Included

Connection Hardwire tails

PERFORMANCE DATA (for 1000mm)

Power Consumption 4.80 W

Supply Voltage 24V DC


Supply Current 0.20 A

Luminous Flux 611.00lm/m


Lumen Efficiency 127.29lm/w

Max Power Length 5000mm

Beam Angle 120°

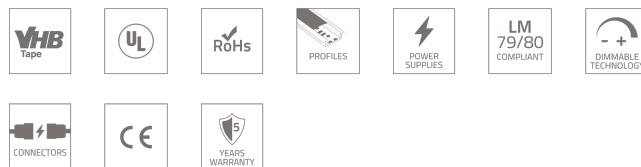

TECHNICAL DRAWING

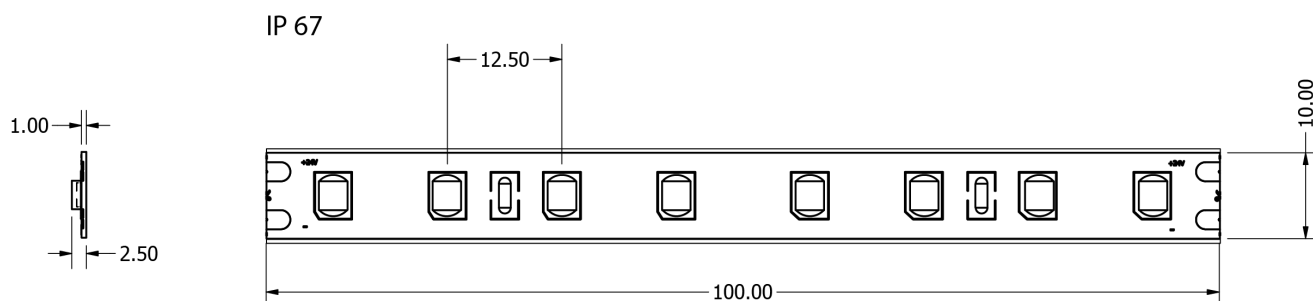


PRODUCT INFORMATION

Description	THERMO LINE 80 3000K 12.50mm IP67 24V 80CRI 4.8W 636LM 100mm Cut Saddle Clips Included 1000mm
Product Code	011-8802
Product Range	Specialist Flex


PRODUCT SPECIFICATION

Dimensions	H4.00/W12.50mm
Cutting Interval	100mm
LED Pitch	12.5mm
Bend Direction	TV
Minimum Bend Radius	20mm
Colour Temperature	3000K
Bin/step	3SDCM
CRI Rating	80.00
Lifetime	> 50,000 h
Operating Temp	-40°C - 105°C
IP Rating	IP67
Mounting	Saddle Clips Included
Connection	Hardwire tails

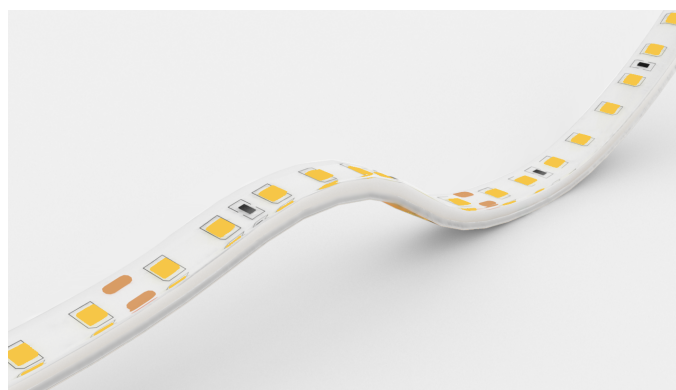


PERFORMANCE DATA (for 1000mm)

Power Consumption	4.80 W
Supply Voltage	24V DC
Supply Current	0.20 A
Luminous Flux	636.00lm/m
Lumen Efficiency	132.50lm/w
Max Power Length	5000mm
Beam Angle	120°

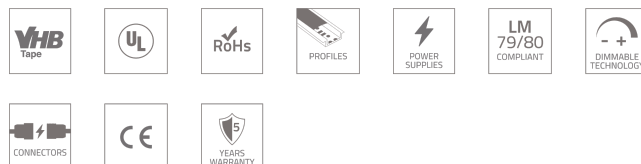

TECHNICAL DRAWING

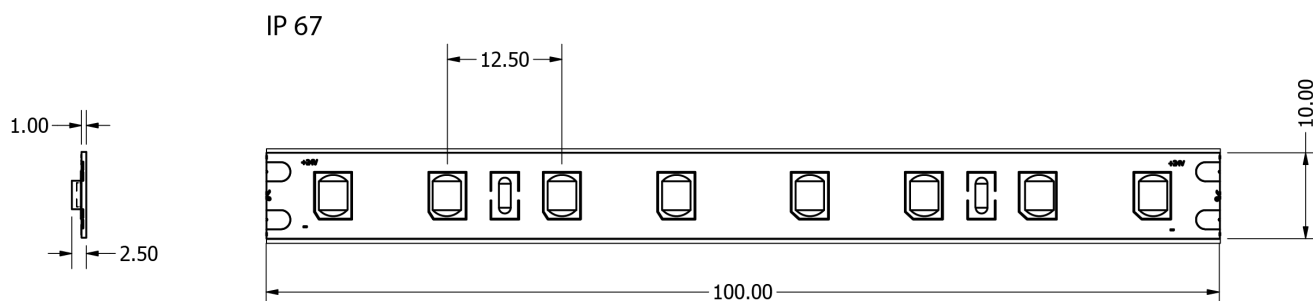

PRODUCT INFORMATION


Description	THERMO LINE 80 4000K 12.50mm IP67 24V 80CRI 4.8W 670LM 100mm Cut Saddle Clips Included 1000mm
-------------	---

Product Code 011-8803

Product Range Specialist Flex


PRODUCT SPECIFICATION

Dimensions	H4.00/W12.50mm
Cutting Interval	100mm
LED Pitch	12.5mm
Bend Direction	TV
Minimum Bend Radius	20mm
Colour Temperature	4000K
Bin/step	3SDCM
CRI Rating	80.00
Lifetime	> 50,000 h
Operating Temp	-40°C - 105°C
IP Rating	IP67
Mounting	Saddle Clips Included
Connection	Hardwire tails

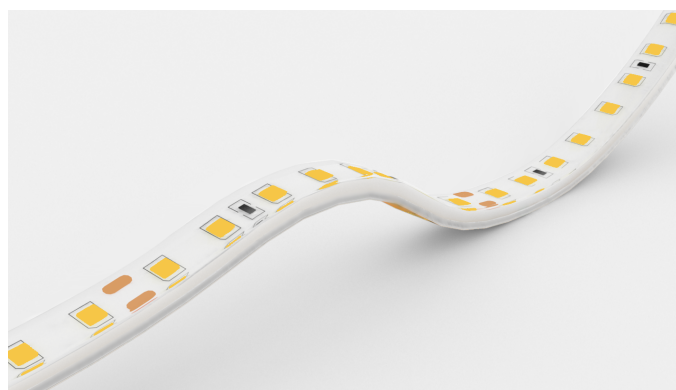


PERFORMANCE DATA (for 1000mm)

Power Consumption	4.80 W
Supply Voltage	24V DC
Supply Current	0.20 A
Luminous Flux	670.00lm/m
Lumen Efficiency	139.58lm/w
Max Power Length	5000mm
Beam Angle	120°

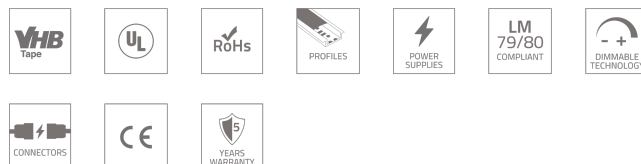

TECHNICAL DRAWING

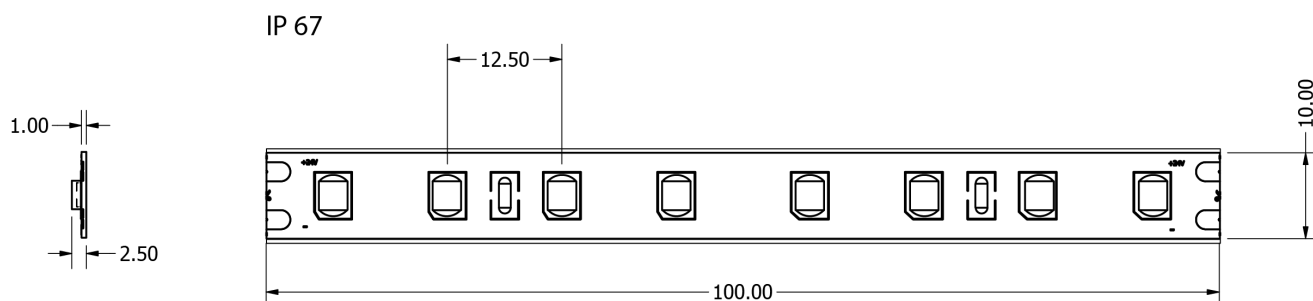

PRODUCT INFORMATION

Description THERMO LINE 80 | 5000K | 12.50mm | IP67 | 24V | 80CRI | 4.8W | 670LM | 100mm Cut | Saddle Clips Included | 1000mm

Product Code 011-8804

Product Range Specialist Flex

PRODUCT SPECIFICATION

Dimensions H4.00/W12.50mm

Cutting Interval 100mm

LED Pitch 12.5mm

Bend Direction TV

Minimum Bend Radius 20mm

Colour Temperature 5000K

Bin/step 3SDCM

CRI Rating 80.00


Lifetime > 50,000 h

Operating Temp -40°C - 105°C

IP Rating IP67

Mounting Saddle Clips Included

Connection Hardwire tails

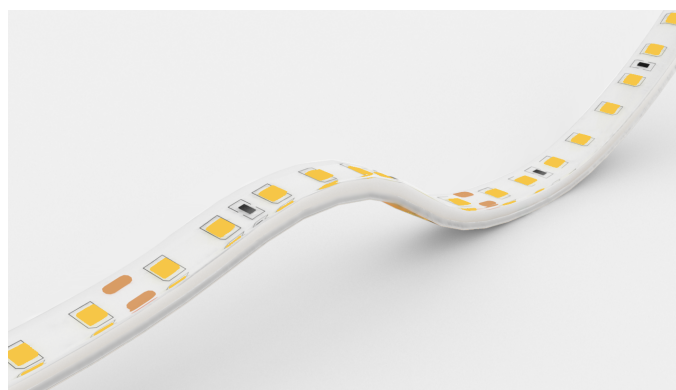

PERFORMANCE DATA (for 1000mm)

Power Consumption 4.80 W

Supply Voltage 24V DC

Supply Current 0.20 A

Luminous Flux 670.00lm/m

Lumen Efficiency 139.58lm/w

Max Power Length 5000mm

Beam Angle 120°



TECHNICAL DRAWING

