


Indoor | 48V fixtures | Yori Linear 48V / Opal

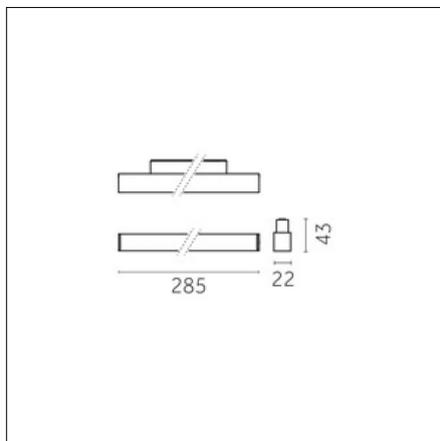

Wide 102°

21

IP20



Risk 1

850°



Code 0.BN420.HN21

Light source features

Number of light sources: 1

Source type: LED HN

Watt: 5.4W

Lm: 810lm

Lm/W: 150lm/W

Kelvin/CRI: 4000K / >90

SDCM/L90 B10: < 3 / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off

Isolation class: Class III

Optical features

Beam angle: 102°

Optical type, adjustability: Fixed

Interchangeable optic (IOS): NO

Physical features

Material: Aluminium

Diffusing screen: Opal

Fixing: Ceiling

Finishing: Black (Standard)



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net



Tracks/channels



Code 0.02465.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)
 Length: 1000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 50 mm



For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02466.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)
 Length: 2000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02467.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)
 Length: 3000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02401.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)
 Length: 1000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02401.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)
 Length: 1000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm

For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02402.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)
 Length: 2000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm

For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).


Tracks/channels



Code 0.02402.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)
 Length: 2000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02403.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)
 Length: 3000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02403.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)
 Length: 3000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02445.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)
 Length: 1000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 56,5 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02446.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)
 Length: 2000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 56,5 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02447.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)
 Length: 3000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 56,5 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Tracks/channels




Code 0.02450.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02450.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02451.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02451.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02452.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02452.0031 - Track 48V Surface slim


Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Tracks/channels




Code 0.02455.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02455.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02456.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02456.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02457.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02457.0031 - Track 48V Surface-Pendant



Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately



For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Tracks/channels





Code 0.02460.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)
 Length: 1000mm
 Description: Accessories: drivers to be ordered separately
 For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





Code 0.02460.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)
 Length: 1000mm
 Description: Accessories: drivers to be ordered separately
 For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





Code 0.02461.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)
 Length: 2000mm
 Description: Accessories: drivers to be ordered separately
 For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





Code 0.02461.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)
 Length: 2000mm
 Description: Accessories: drivers to be ordered separately
 For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02462.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)
 Length: 3000mm
 Description: Accessories: drivers to be ordered separately
 For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02462.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)
 Length: 3000mm
 Description: Accessories: drivers to be ordered separately
 For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Indoor | 48V fixtures | Yori Linear 48V / Opal

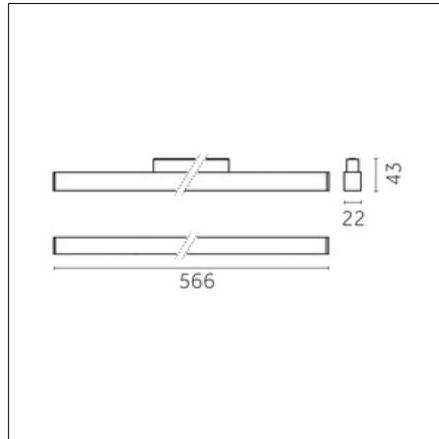

Wide 102°

21

IP20



Risk 1

850°



Code 0.BN430.HN21

Light source features

Number of light sources: 1

Source type: LED HN

Watt: 10.8W

Lm: 1620lm

Lm/W: 150lm/W

Kelvin/CRI: 4000K / >90

SDCM/L90 B10: < 3 / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off

Isolation class: Class III

Optical features

Beam angle: 102°

Optical type, adjustability: Fixed

Interchangeable optic (IOS): NO

Physical features

Material: Aluminium

Diffusing screen: Opal

Fixing: Ceiling

Finishing: Black (Standard)


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net


Tracks/channels



Code 0.02465.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)
 Length: 1000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02466.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)
 Length: 2000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02467.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)
 Length: 3000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02401.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)
 Length: 1000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02401.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)
 Length: 1000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02402.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)
 Length: 2000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).


Tracks/channels



Code 0.02402.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)
 Length: 2000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02403.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)
 Length: 3000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02403.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)
 Length: 3000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02445.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)
 Length: 1000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 56,5 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02446.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)
 Length: 2000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 56,5 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02447.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)
 Length: 3000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 56,5 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Tracks/channels




Code 0.02450.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02450.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02451.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02451.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02452.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02452.0031 - Track 48V Surface slim


Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Tracks/channels




Code 0.02455.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02455.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02456.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02456.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02457.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02457.0031 - Track 48V Surface-Pendant



Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Tracks/channels





Code 0.02460.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





Code 0.02460.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





Code 0.02461.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





Code 0.02461.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





Code 0.02462.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02462.0031 - Track 48V High Surface/Pendant


Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Indoor | 48V fixtures | Yori Linear 48V / Opal

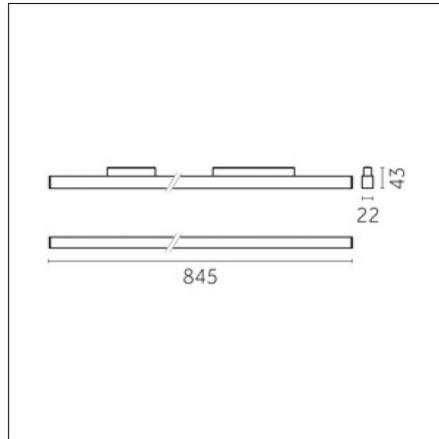

Wide 102°

21

IP20



Risk 1

850°



Code 0.BN450.HN21

Light source features

Number of light sources: 1

Source type: LED HN

Watt: 16.2W

Lm: 2193lm

Lm/W: 150lm/W

Kelvin/CRI: 4000K / >90

SDCM/L90 B10: < 3 / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off

Isolation class: Class III

Optical features

Beam angle: 102°

Optical type, adjustability: Fixed

Interchangeable optic (IOS): NO

Physical features

Material: Aluminium

Diffusing screen: Opal

Fixing: Ceiling

Finishing: Black (Standard)



Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net



Tracks/channels



Code 0.02465.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)
 Length: 1000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02466.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)
 Length: 2000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02467.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)
 Length: 3000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02401.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)
 Length: 1000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02401.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)
 Length: 1000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm

For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02402.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)
 Length: 2000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm

For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).


Tracks/channels



Code 0.02402.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)
 Length: 2000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02403.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)
 Length: 3000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02403.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)
 Length: 3000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02445.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)
 Length: 1000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 56,5 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02446.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)
 Length: 2000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 56,5 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02447.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)
 Length: 3000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 56,5 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Tracks/channels




Code 0.02450.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02450.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02451.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02451.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02452.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02452.0031 - Track 48V Surface slim


Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Tracks/channels




Code 0.02455.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02455.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02456.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02456.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02457.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02457.0031 - Track 48V Surface-Pendant



Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Tracks/channels





Code 0.02460.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





Code 0.02460.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





Code 0.02461.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





Code 0.02461.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





Code 0.02462.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02462.0031 - Track 48V High Surface/Pendant


Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Indoor | 48V fixtures | Yori Linear 48V / Opal

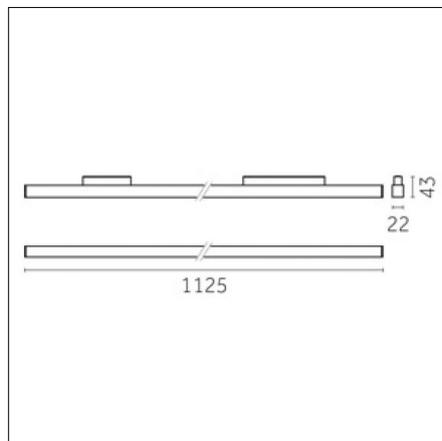

Wide 102°

21

IP20



Risk 1

850°



Code 0.BN460.HN21

Light source features

Number of light sources: 1

Source type: LED HN

Watt: 21.6W

Lm: 3240lm

Lm/W: 150lm/W

Kelvin/CRI: 4000K / >90

SDCM/L90 B10: < 3 / 50000

Electrical features

Driver included: YES

Driver position: integrated

Driver type: On-Off

Isolation class: Class III

Optical features

Beam angle: 102°

Optical type, adjustability: Fixed

Interchangeable optic (IOS): NO

Physical features

Material: Aluminium

Diffusing screen: Opal

Fixing: Ceiling

Finishing: Black (Standard)


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999

www.reggiani.net
contact@reggiani.net


Tracks/channels



Code 0.02465.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)
 Length: 1000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02466.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)
 Length: 2000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02467.0021 - Track 48V Recessed Trimless

Finishing: Black (Standard)
 Length: 3000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 50 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02401.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)
 Length: 1000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02401.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)
 Length: 1000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm

For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02402.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)
 Length: 2000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm

For installations with Yori Evo 48V and Yori Pendant 48V [with dimmer on board](#), use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).


Tracks/channels



Code 0.02402.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)
 Length: 2000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02403.0012 - Track 48V Recessed Trim

Finishing: Embossed matt white (Standard)
 Length: 3000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02403.0031 - Track 48V Recessed Trim

Finishing: Embossed matt black (Standard)
 Length: 3000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 28 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02445.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)
 Length: 1000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 56,5 mm


For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02446.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)
 Length: 2000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 56,5 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02447.0021 - Track 48V High Recessed Trimless

Finishing: Black (Standard)
 Length: 3000mm
 Description: Accessories: drivers to be ordered separately
 Cut-out: 56,5 mm

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Tracks/channels




Code 0.02450.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02450.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02451.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02451.0031 - Track 48V Surface slim

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02452.0012 - Track 48V Surface slim

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02452.0031 - Track 48V Surface slim


Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Tracks/channels




Code 0.02455.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02455.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02456.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02456.0031 - Track 48V Surface-Pendant

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.




Code 0.02457.0012 - Track 48V Surface-Pendant

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02457.0031 - Track 48V Surface-Pendant



Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.

Tracks/channels





Code 0.02460.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





Code 0.02460.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)

Length: 1000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





Code 0.02461.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





Code 0.02461.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)

Length: 2000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.





Code 0.02462.0012 - Track 48V High Surface/Pendant

Finishing: Embossed matt white (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.



Code 0.02462.0031 - Track 48V High Surface/Pendant

Finishing: Embossed matt black (Standard)

Length: 3000mm

Description: Accessories: drivers to be ordered separately

For installations with Yori Evo 48V and Yori Pendant 48V with dimmer on board, use P.31656.0000 DRIVER 48Vdc or P.31650.0000 DRIVER 48Vdc 150W.