



## QCP Track Mounted LED Spotlight 70mm


- Laser cut steel construction
- Passive aluminium heatsink
- XTM Xicato remote phosphor LED technology
- Ra81 Standard/Ra81 Vibrant colour rendering up to 3000 lumens
- Ra98 Artist/Ra95 Vibrant colour rendering up to 2000 lumens
- LED module life rating at 50,000hrs L70/C3
- 1x2 step MacAdams over life
- 5 year warranty on LED system
- Colour consistent over life
- Interchangeable reflectors
- Dimming available
- System efficacy up to 129 lm/w
- Accessories available (see accessories page)
- UK design and manufacture

## Product Code

Product	QCP	Track Mounted Spotlight
Reflector Size	17T	70mm Diameter
	S	Standard Driver
	D	Dali Driver
Drivers	B	DSI Driver
	P	1-10V Driver c/w potentiometer*
	T	Triac Driver
	07	700 Lumens
	10	1000 Lumens
	13	1300 Lumens
	15	1500 Lumens
	20	2000 Lumens
	30	3000 Lumen
	27	2700 Kelvin
	30	3000 Kelvin
	35	3500 Kelvin
	40	4000 Kelvin
	K	Ra81 Standard
	A	Ra98 Artist Series
	V	Ra81 Vibrant
	R	Ra95 Vibrant
Beam Angle (9mm LES)	10	10° Twist-lock Reflector**
	2T	24° Twist-lock Reflector
Beam Angle (19mm LES)	4T	40° Twist-lock Reflector
	6T	60° Twist-lock Reflector
	W	White
	B	Black
	G	Grey
	0	3-Circuit Track Adapter
	2	Surface Mounted
	3	Single Circuit Track Adapter
	4	Dali Track Adapter

## Colour Rendering Table

	Ra	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15	
Standard Series	K	81	80	85	89	81	78	80	86	66	16	64	79	58	81	93	75
Artist Series	A	98	98	99	98	98	98	97	98	98	98	98	98	88	98	98	98
Vibrant Series V80	V	81	81	86	81	81	80	80	85	85	16	66	80	62	82	93	77
Vibrant Series V95	R	95	99	98	96	96	98	96	95	95	90	67	95	97	98	98	98

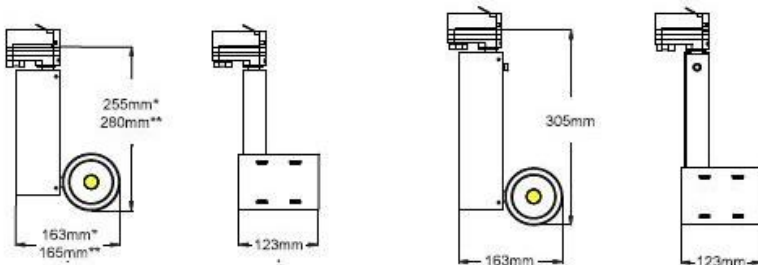

Inc C/W

\*\* max 2000lm 9mm LES

**XICATO** CE

