

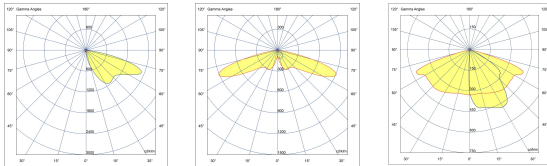
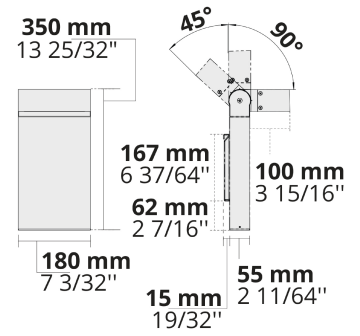


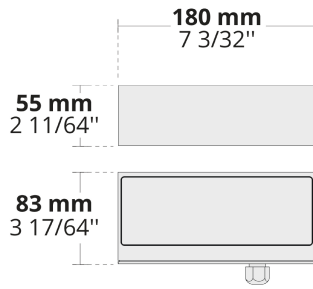


Minimalistic design, small form factor, and jaw-dropping optics make the DOGO family stand out for the illumination tasks of contemporary architectural projects.

- 1 to 6 light distribution ratio (DYN)
- Equipped with HEPER's Dyno (DYN) module or high efficiency LED chips with flexible lens optics
- Minimized glare with hidden light source
- Indirect lighting with reflector technology
- Optimized linear forward or side throw options with full cut-off and minimized stray light
- Motion sensor & emergency kit options

Product code	Product name	Light distribution	Delivered lumens flux	Rated input power	Colour temperature	Control	Weight
LW6048.575-EN	DOGO Forward	[SLFW] 111x53°	805 - 2256 lm	10 - 20 W	2200 K CRI 80, 2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off	1.1 kg
LW6048.585-EN	DOGO Side	[SLSW] 154x55°	402 - 1170 lm	5 - 10 W	2200 K CRI 80, 2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off	1.1 kg
LW6048.910-EN	DOGO 8 LED	[T3] 144x57°	709 - 808 lm	9.5 W	2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off	1.1 kg
LW7035.575-EN	DOGO Ex Forward	[SLFW] 111x53°	805 - 2256 lm	10 - 20 W	2200 K CRI 80, 2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off	5.1 kg
LW7035.585-EN	DOGO Ex Side	[SLSW] 154x55°	496 - 1170 lm	5 - 10 W	2200 K CRI 80, 2700 K CRI 80, 3000 K CRI 80, 4000 K CRI 70, 4000 K CRI 80	On/Off	5.1 kg

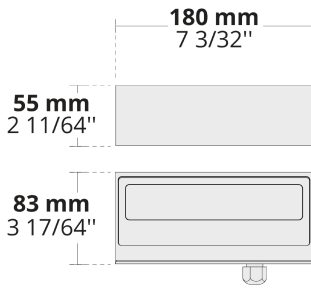

**[SLFW]**  
Special linear,  
Forward throw




**[SLSW]**  
Special linear,  
Side throw



**[T3]**  
Type III,  
Asymmetric,  
Side throw

Extras

Mounting options



**ESMA**  
Extra surface  
mounting adaptor for  
a flat wall

Consult the factory




**UNI**  
120-277V 50/60Hz

Luminaire body options



**DPC**  
Double powder  
coating

Consult the factory




**EK**  
Emergency kit


Consult the factory




**MS**  
Motion sensor




**[HM1]**  
Black




**[HM2]**  
Dark grey




**[HM3]**  
Anthracite  
grey



**[HM4]**  
Light grey



**[HM5]**  
White



**[HM6]**  
Bronze



**[CC]**  
Custom  
colour  
(Please  
specify RAL  
code)