


MOTO-VENUS 125 ROUND TRIM

ORDERING CODE: M556MC22-903020DC10

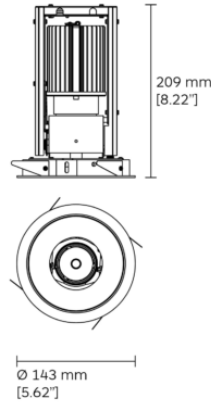

DESCRIPTION

Motorized round recessed luminaire with mounting trim and light body made of cast aluminium.
 Body aesthetic available in Flat or Concave design.
 The luminaire includes brackets for trim installation on ceiling thickness max. 32mm, or trimless installation (only Venus 125) on ceiling thickness max. 25mm.
 Two remote controlled DC motors drive the movements of the fixture.
 Moto-Venus 70 is tiltable vertically 0-30° in two directions, Moto-Venus 125 is tiltable vertically 0-45° in two directions.
 All the fixtures are rotatable horizontally 350°.
 The movements of the fixture, as well as the intensity and the colour tuning of the light, are controlled via CASAMBI™ application.

MOUNTING

Recessed

OPTIC

Reflector + diffuser.
 Beam Angle: Narrow / Medium / Wide.

DIMMING OPTIONS

DC - CASAMBI



LIGHT SOURCE AND PERFORMANCE

LIGHT SOURCE:	LED Module - COB LED - COB
SDCM:	3-step MacAdam
COLOR TEMPERATURE:	30 - 3000K
CRI:	90
IP:	20
LED POWER:	22
NOMINAL LUMEN:	2418
SYSTEM POWER:	24
DELIVERED LUMEN:	1253
BEAM ANGLE (BA°):	20

PRODUCT CODE	LIGHT SOURCE CODE	-	CRI	CCT	BEAM ANGLE (BA°)	DIMMING OPTIONS	FINISH
M556	MC22	-	90	30	20	DC	10 - Black

NOTES:

For other CCT options, Tuneable White (TW) version please contact us.

We reserve the right to change specifications without prior notification.