

## Technical Description

Evo Zoom is a single source LED spotlight that comes as standard in white, black and brushed aluminium finishes. It has a lockable dual lens zoom for flexible beam distribution. The narrow spot beam in our 9W 700lm module has a peak intensity of 11313cd. The Evo has a 360 degree bearing aided rotation and 180 degree constant torque tilt mechanism, both lockable. The Jack Plug system enables the luminaire to be easily disconnected and reconnected to all of Precision Lighting's systems. The onboard 24V driver ensures overcurrent protection and is not polarity sensitive.

## Mechanical

**Category** Interior use only IP20  
**Material** Machined Aluminium  
**Lockable** Pan & Tilt  
**Accessories** Snoots | Louvres | Lenses  
**Systems** Eutrac | Monopoint | LV tracks  
**Weight** 460g




## Finishes

**Finishes** Brushed Aluminium | Black | White | Custom\*

\* Please enquire as to the availability of non-standard Finishes

## Optical & Electrical

System Power 9W	Driver/PSU Code	QTY Lights	Input
<b>Module Output</b> 700lm*	————— 1-10V Dimming —————		
<b>Gear Type</b> Dimmable available	PSCV-20-24-A-TC	1	230V
<b>Colour Temperature</b> 3000K*	PSCV-15-24-A-TC	1	110/127V
<b>CRI</b> 92 TYP	PSCV-120-24-A-OS	1 to 10	230V
<b>TM-30</b> RF: 90 RG: 99	————— DALI Dimming —————		
<b>Beam Angle</b> 09° to 30°	PSCV-16-24-D-TC	1	230V
	PSCV-15-24-D-TC	1	110/127V
	PSCV-100-24-D-EL	1 to 10	120/230V

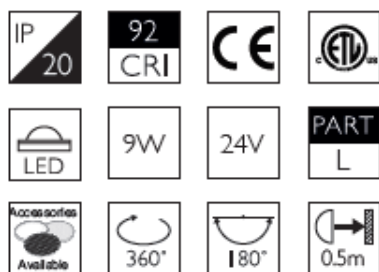

Product Photometry tested in accordance with LM-79 at 3000K, please enquire for 2700K data

Finish	Cable	Base Track	Retrac	Eutrac	Trimless	Flat	Node	Surface
AL		BT-592-AL-XX092Z0	RT-592-AL-XX092Z0	ELT4-592-AL-XX092Z0	MPS-592-AL-XX092Z0	MPX-592-AL-XX092Z0	MPY-592-AL-XX092Z0	MPZ-592-AL-XX092Z0
WH			RT-592-WH-XX092Z0	ELT4-592-WH-XX092Z0	MPS-592-WH-XX092Z0	MPX-592-WH-XX092Z0	MPY-592-WH-XX092Z0	MPZ-592-WH-XX092Z0
BK			RT-592-BK-XX092Z0		MPS-592-BK-XX092Z0	MPX-592-BK-XX092Z0	MPY-592-BK-XX092Z0	MPZ-592-BK-XX092Z0
BR								

For 3000K Substitute XX with 30

For 2700K Substitute XX with 27

\*All Brass and Bronze finishes are made to order and subject to MOQ