



Indoor | Ceiling mounted luminaires | Fade

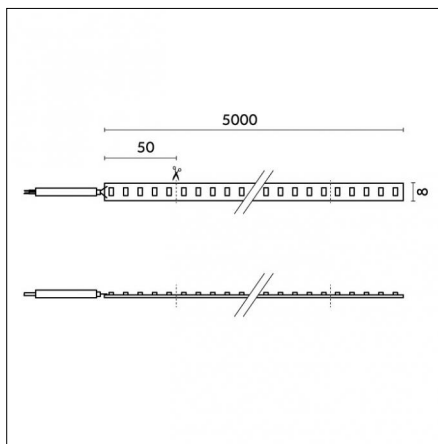

Product no optic
included

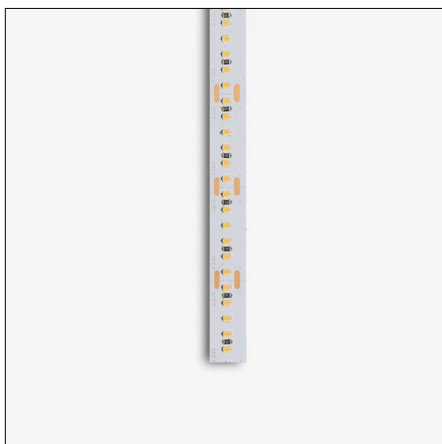

IP20



Code X.S-L05.CH00

Light source features

Number of light sources: 1

Source type: LED CH

Watt: 14.5 W/mW

Lm: 1280lm

Lm/W: 89lm/W

Kelvin/CRI: 3000K / >95

SDCM/L80 B10: < 3 / 50000

Electrical features

Driver included: NO

Driver type: no driver included 24V DC

Isolation class: Class III

Optical features

Beam angle: no optic included

Interchangeable optic (IOS): NO

Physical features

Material: Flexible circuit board

Mounting: Surface mounted

Finishing: Without finish / Stainles Steel / Natural aluminium
(Standard)


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999


www.reggiani.net
contact@reggiani.net

Driver




Code 0.30820.0000 - Driver

Type: On-Off
Watt: 15W - AC Input: 220-240Vac - mA:mA
Description:




Code 0.30821.0000 - Driver

Type: On-Off
Watt: 30W - AC Input: 220-240Vac - mA:mA
Description:




Code 0.30822.0000 - Driver

Type: On-Off
Watt: 60W - AC Input: 120-240V - mA:mA
Description:




Code 0.30823.0000 - Driver

Type: On-Off
Watt: 75W - AC Input: 220-240Vac - mA:mA
Description:



Code 0.30824.0000 - Driver


Type: On-Off
Watt: 100W - AC Input: 120-240V - mA:mA
Description:



Code 0.30825.0000 - Driver

Type: On-Off
Watt: 200W - AC Input: 120-240V - mA:mA
Description:

Driver




Code H.30826.0000 - Dimmer - 1 channel

Type: Bluetooth

Watt: 280W - AC Input: 24-48Vcc - mA:mA

Description:





Code Y.30826.0000 - Dimmer -1 channel

Type: Dimmer 1-10V / DALI / PUSH

Watt: 280W - AC Input: 24-48Vcc - mA:mA

Description:


Accessories



Code 0.26800.0000 - 3030mm Aluminium Profile

Type: Mounting


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26800.0012 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt white (Standard)



Code 0.26800.0031 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt black (Standard)



Code 0.26801.0000 - Opal Diffuser T 55% 3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26802.0000 - Opal Diffuser T 70% 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)





Code 0.26803.0000 - Micro Prismatic Diffuser Low Glare 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).



Accessories



Code 0.26804.0000 - Black Frosted diffuser L3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26815.0000 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26815.0012 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting


Finishing: Embossed matt white (Standard)



Code 0.26815.0031 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting

Finishing: Embossed matt black (Standard)



Code 0.26816.0000 - Adjustable brackets (2x) +/-40° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)




Code 0.26817.0000 - Fixed tilted brackets (4x) 15°/30°/45°/60° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)

Accessories



Code 0.26818.0000 - Fixed brackets (2x) for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)





Code 0.26819.0000 - Double sided tape 3300mm

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)

Indoor | Ceiling mounted luminaires | Fade

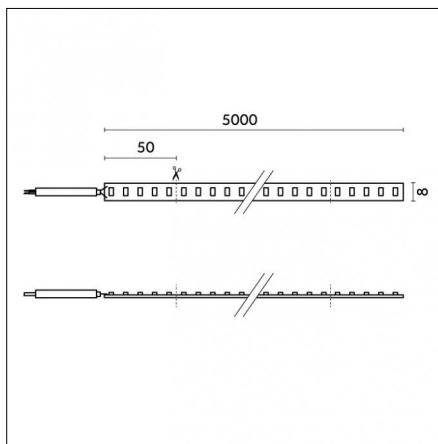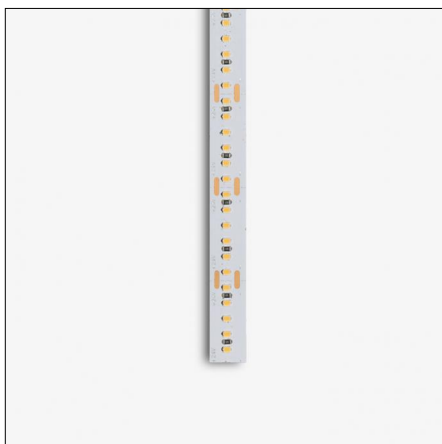

Product no optic
included



IP20



Code X.S-L05.HH00

Light source features

Number of light sources: 1

Source type: LED HH

Watt: 14.5 W/mW

Lm: 1260lm

Lm/W: 88lm/W

Kelvin/CRI: 2700K / >95

SDCM/L80 B10: < 3 / 50000

Electrical features

Driver included: NO

Driver type: no driver included 24V DC

Isolation class: Class III

Optical features

Beam angle: no optic included

Interchangeable optic (IOS): NO

Physical features

Material: Flexible circuit board

Mounting: Surface mounted

Finishing: Without finish / Stainles Steel / Natural aluminium
(Standard)


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999


www.reggiani.net
contact@reggiani.net

Driver




Code 0.30820.0000 - Driver

Type: On-Off
Watt: 15W - AC Input: 220-240Vac - mA:mA
Description:




Code 0.30821.0000 - Driver

Type: On-Off
Watt: 30W - AC Input: 220-240Vac - mA:mA
Description:




Code 0.30822.0000 - Driver

Type: On-Off
Watt: 60W - AC Input: 120-240V - mA:mA
Description:




Code 0.30823.0000 - Driver

Type: On-Off
Watt: 75W - AC Input: 220-240Vac - mA:mA
Description:



Code 0.30824.0000 - Driver


Type: On-Off
Watt: 100W - AC Input: 120-240V - mA:mA
Description:



Code 0.30825.0000 - Driver


Type: On-Off
Watt: 200W - AC Input: 120-240V - mA:mA
Description:

Driver



Code H.30826.0000 - Dimmer - 1 channel



Type: Bluetooth
Watt: 280W - AC Input: 24-48Vcc - mA:mA
Description:



Code Y.30826.0000 - Dimmer -1 channel

Type: Dimmer 1-10V / DALI / PUSH
Watt: 280W - AC Input: 24-48Vcc - mA:mA
Description:


Accessories



Code 0.26800.0000 - 3030mm Aluminium Profile

Type: Mounting


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26800.0012 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt white (Standard)



Code 0.26800.0031 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt black (Standard)



Code 0.26801.0000 - Opal Diffuser T 55% 3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26802.0000 - Opal Diffuser T 70% 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)





Code 0.26803.0000 - Micro Prismatic Diffuser Low Glare 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).



Accessories



Code 0.26804.0000 - Black Frosted diffuser L3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26815.0000 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26815.0012 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting


Finishing: Embossed matt white (Standard)



Code 0.26815.0031 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting

Finishing: Embossed matt black (Standard)



Code 0.26816.0000 - Adjustable brackets (2x) +/-40° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)




Code 0.26817.0000 - Fixed tilted brackets (4x) 15°/30°/45°/60° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)

Accessories



Code 0.26818.0000 - Fixed brackets (2x) for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)





Code 0.26819.0000 - Double sided tape 3300mm

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)

Indoor | Ceiling mounted luminaires | Fade

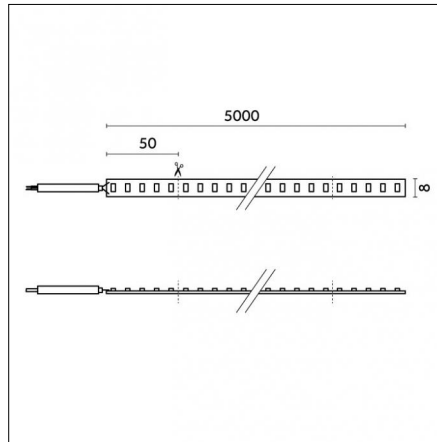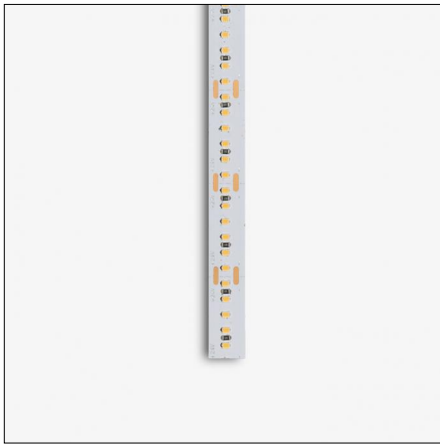

Product no optic
included



IP20



Code X.S-L05.NH00

Light source features

Number of light sources: 1

Source type: LED NH

Watt: 14.5 W/mW

Lm: 1350lm

Lm/W: 94lm/W

Kelvin/CRI: 4000K / >95

SDCM/L80 B10: < 3 / 50000

Electrical features

Driver included: NO

Driver type: no driver included 24V DC

Isolation class: Class III

Optical features

Beam angle: no optic included

Interchangeable optic (IOS): NO

Physical features

Material: Flexible circuit board

Mounting: Surface mounted

Finishing: Without finish / Stainles Steel / Natural aluminium
(Standard)


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999


www.reggiani.net
contact@reggiani.net

Driver




Code 0.30820.0000 - Driver

Type: On-Off
Watt: 15W - AC Input: 220-240Vac - mA:mA
Description:




Code 0.30821.0000 - Driver

Type: On-Off
Watt: 30W - AC Input: 220-240Vac - mA:mA
Description:




Code 0.30822.0000 - Driver

Type: On-Off
Watt: 60W - AC Input: 120-240V - mA:mA
Description:




Code 0.30823.0000 - Driver

Type: On-Off
Watt: 75W - AC Input: 220-240Vac - mA:mA
Description:



Code 0.30824.0000 - Driver


Type: On-Off
Watt: 100W - AC Input: 120-240V - mA:mA
Description:



Code 0.30825.0000 - Driver

Type: On-Off
Watt: 200W - AC Input: 120-240V - mA:mA
Description:

Driver




Code H.30826.0000 - Dimmer - 1 channel

Type: Bluetooth

Watt: 280W - AC Input: 24-48Vcc - mA:mA

Description:





Code Y.30826.0000 - Dimmer -1 channel

Type: Dimmer 1-10V / DALI / PUSH

Watt: 280W - AC Input: 24-48Vcc - mA:mA

Description:


Accessories



Code 0.26800.0000 - 3030mm Aluminium Profile

Type: Mounting


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26800.0012 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt white (Standard)



Code 0.26800.0031 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt black (Standard)



Code 0.26801.0000 - Opal Diffuser T 55% 3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26802.0000 - Opal Diffuser T 70% 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)





Code 0.26803.0000 - Micro Prismatic Diffuser Low Glare 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).



Accessories



Code 0.26804.0000 - Black Frosted diffuser L3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26815.0000 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26815.0012 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting


Finishing: Embossed matt white (Standard)



Code 0.26815.0031 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting

Finishing: Embossed matt black (Standard)



Code 0.26816.0000 - Adjustable brackets (2x) +/-40° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)




Code 0.26817.0000 - Fixed tilted brackets (4x) 15°/30°/45°/60° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)

Accessories




Code 0.26818.0000 - Fixed brackets (2x) for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)





Code 0.26819.0000 - Double sided tape 3300mm

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)

Indoor | Ceiling mounted luminaires | Fade

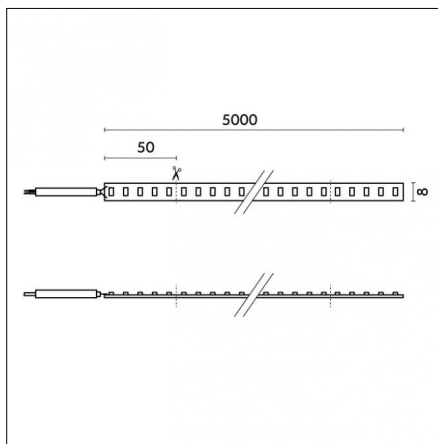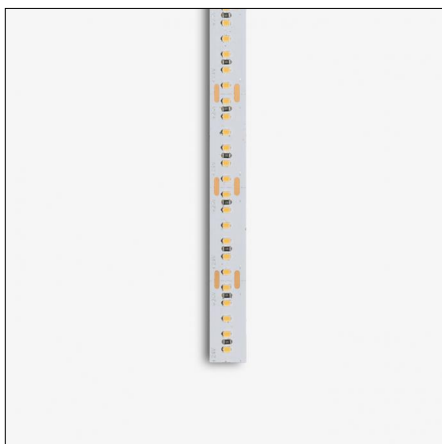

Product no optic
included



IP20



Code X.S-L05.QW00

Light source features

Number of light sources: 1

Source type: LED QW

Watt: 14.5 W/mW

Lm: 1290lm

Lm/W: 90lm/W

Kelvin/CRI: 3500K / >95

SDCM/L80 B10: < 3 / 50000

Electrical features

Driver included: NO

Driver type: no driver included 24V DC

Isolation class: Class III

Optical features

Beam angle: no optic included

Interchangeable optic (IOS): NO

Physical features

Material: Flexible circuit board

Mounting: Surface mounted

Finishing: Without finish / Stainles Steel / Natural aluminium
(Standard)


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999


www.reggiani.net
contact@reggiani.net

Driver




Code 0.30820.0000 - Driver

Type: On-Off
Watt: 15W - AC Input: 220-240Vac - mA:mA
Description:




Code 0.30821.0000 - Driver

Type: On-Off
Watt: 30W - AC Input: 220-240Vac - mA:mA
Description:




Code 0.30822.0000 - Driver

Type: On-Off
Watt: 60W - AC Input: 120-240V - mA:mA
Description:




Code 0.30823.0000 - Driver

Type: On-Off
Watt: 75W - AC Input: 220-240Vac - mA:mA
Description:



Code 0.30824.0000 - Driver


Type: On-Off
Watt: 100W - AC Input: 120-240V - mA:mA
Description:



Code 0.30825.0000 - Driver

Type: On-Off
Watt: 200W - AC Input: 120-240V - mA:mA
Description:

Driver




Code H.30826.0000 - Dimmer - 1 channel

Type: Bluetooth

Watt: 280W - AC Input: 24-48Vcc - mA:mA

Description:





Code Y.30826.0000 - Dimmer -1 channel

Type: Dimmer 1-10V / DALI / PUSH

Watt: 280W - AC Input: 24-48Vcc - mA:mA

Description:


Accessories



Code 0.26800.0000 - 3030mm Aluminium Profile

Type: Mounting


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26800.0012 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt white (Standard)



Code 0.26800.0031 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt black (Standard)



Code 0.26801.0000 - Opal Diffuser T 55% 3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26802.0000 - Opal Diffuser T 70% 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)





Code 0.26803.0000 - Micro Prismatic Diffuser Low Glare 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).



Accessories



Code 0.26804.0000 - Black Frosted diffuser L3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26815.0000 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26815.0012 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting


Finishing: Embossed matt white (Standard)



Code 0.26815.0031 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting

Finishing: Embossed matt black (Standard)



Code 0.26816.0000 - Adjustable brackets (2x) +/-40° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)




Code 0.26817.0000 - Fixed tilted brackets (4x) 15°/30°/45°/60° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)

Accessories




Code 0.26818.0000 - Fixed brackets (2x) for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)





Code 0.26819.0000 - Double sided tape 3300mm

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)

Indoor | Ceiling mounted luminaires | Fade

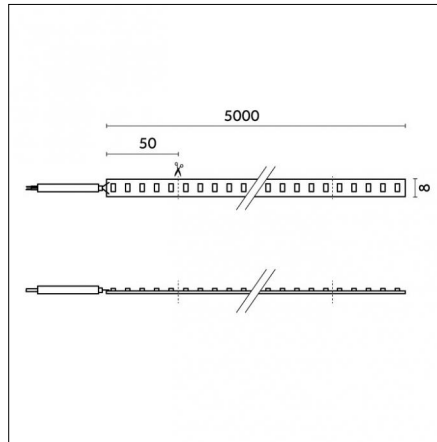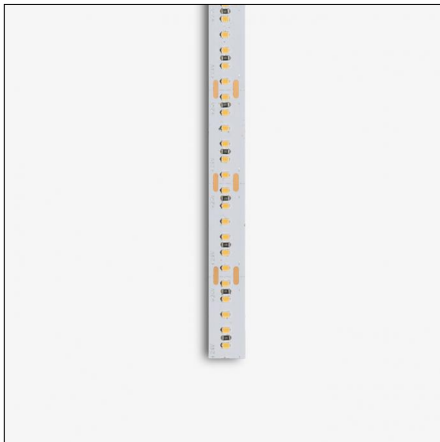

Product no optic
included



Code X.S-L05.BH00

Light source features

Number of light sources: 1

Source type: LED BH

Watt: 14.5 W/mW

Lm: 1190lm

Lm/W: 83lm/W

Kelvin/CRI: 2200K / >95

SDCM/L80 B10: < 3 / 50000

Electrical features

Driver included: NO

Driver type: no driver included 24V DC

Isolation class: Class III

Optical features

Beam angle: no optic included

Interchangeable optic (IOS): NO

Physical features

Material: Flexible circuit board

Mounting: Surface mounted

Finishing: Without finish / Stainles Steel / Natural aluminium
(Standard)


Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).

Reggiani SPA Illuminazione

Viale Monza, 16 20845 Sovico (MB) Italy
Tel. (+39) 039 2071.1 fax (+39) 039 2071 999


www.reggiani.net
contact@reggiani.net

Driver




Code 0.30820.0000 - Driver

Type: On-Off
Watt: 15W - AC Input: 220-240Vac - mA:mA
Description:




Code 0.30821.0000 - Driver

Type: On-Off
Watt: 30W - AC Input: 220-240Vac - mA:mA
Description:




Code 0.30822.0000 - Driver

Type: On-Off
Watt: 60W - AC Input: 120-240V - mA:mA
Description:




Code 0.30823.0000 - Driver

Type: On-Off
Watt: 75W - AC Input: 220-240Vac - mA:mA
Description:



Code 0.30824.0000 - Driver


Type: On-Off
Watt: 100W - AC Input: 120-240V - mA:mA
Description:



Code 0.30825.0000 - Driver

Type: On-Off
Watt: 200W - AC Input: 120-240V - mA:mA
Description:

Driver




Code H.30826.0000 - Dimmer - 1 channel

Type: Bluetooth

Watt: 280W - AC Input: 24-48Vcc - mA:mA

Description:





Code Y.30826.0000 - Dimmer -1 channel

Type: Dimmer 1-10V / DALI / PUSH

Watt: 280W - AC Input: 24-48Vcc - mA:mA

Description:


Accessories



Code 0.26800.0000 - 3030mm Aluminium Profile

Type: Mounting


Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26800.0012 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt white (Standard)



Code 0.26800.0031 - 3030mm Aluminium Profile

Type: Mounting



Finishing: Embossed matt black (Standard)



Code 0.26801.0000 - Opal Diffuser T 55% 3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26802.0000 - Opal Diffuser T 70% 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)





Code 0.26803.0000 - Micro Prismatic Diffuser Low Glare 3030mm

Type: Optical

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Luminaire constructed in conformity with Directives 2014/35/EU (LV), 2014/30/EU (EMC), 2009/125/EC (Ecodesign) with Regulations (EC) No 245/2009, (EU) No 347/2010 and (EU) 2015/1428 (for luminaires with fluorescent and metal halide lamps only), 2009/125/EC (Ecodesign) with Regulations (EU) No 1194/2012 and 2015/1428 (for LED luminaires only), 2011/65/EU (RoHS 2) and 2012/19/EU (WEEE).



Accessories



Code 0.26804.0000 - Black Frosted diffuser L3030mm

Type: Optical



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26815.0000 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting



Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)



Code 0.26815.0012 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting


Finishing: Embossed matt white (Standard)



Code 0.26815.0031 - End caps (2x) for Fade (Aluminium Profile)

Type: Mounting

Finishing: Embossed matt black (Standard)



Code 0.26816.0000 - Adjustable brackets (2x) +/-40° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)




Code 0.26817.0000 - Fixed tilted brackets (4x) 15°/30°/45°/60° for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)

Accessories




Code 0.26818.0000 - Fixed brackets (2x) for Fade

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)



Code 0.26819.0000 - Double sided tape 3300mm

Type: Mounting

Finishing: Without finish / Stainles Steel / Natural aluminium (Standard)

Description: Surface-mounted for Fade (Aluminium Profile)